

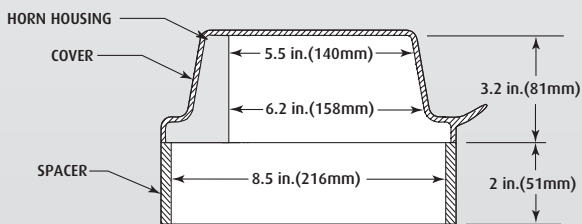


Dimensions and Technical Information

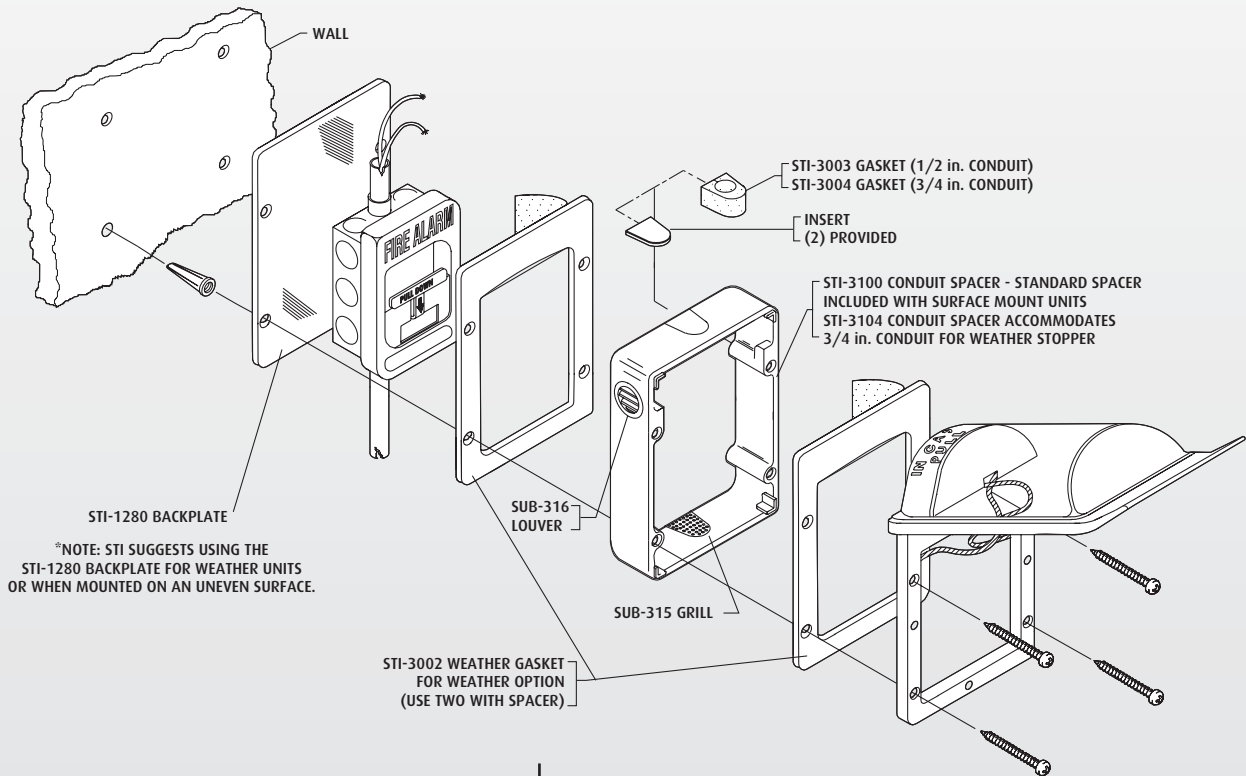


SIDE VIEW

MODELS WITH HORN (STI-1100 Series)

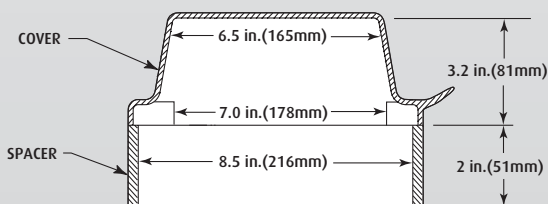

SIDE VIEW

MODELS WITHOUT HORN (STI-1200 AND STI-3150 Series)

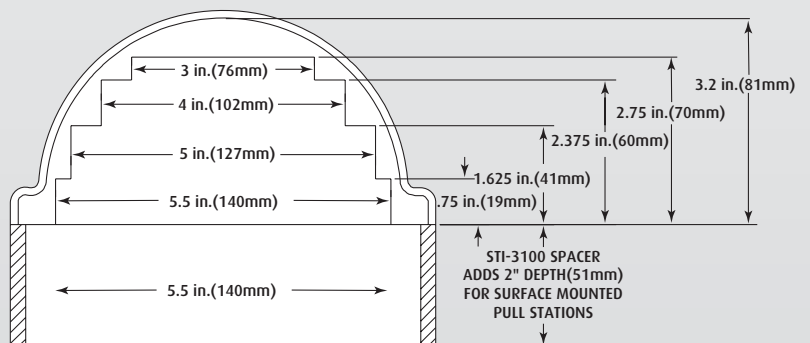

ALL MODELS END VIEW

Important notice

Stopper® II is intended to be used in areas where the incidence of false fire alarms from manual pull stations is high or has proven to be a serious problem. Any disadvantage of this device is more than balanced when one considers the consequences of false fire alarms, especially if fire service personnel and equipment are responding to a false fire alarm when they are needed for a real fire somewhere else. Add this to the disruption of the facility when false alarms occur. If you have, or may have a problem with false fire alarms or physical weather damage to your fire alarm activation devices, the Stopper II could prove invaluable.