

# STI FIRE EXTINGUISHER THEFT STOPPER®

## Dimensions and Technical Information

### Models Available

|                  |                                                                   |
|------------------|-------------------------------------------------------------------|
| <b>STI-6200</b>  | Fire Extinguisher Theft Stopper                                   |
| <b>STI-6200R</b> | Fire Extinguisher Theft Stopper with 12 volt, remote powered horn |
| <b>18015-9</b>   | 6 in. deactivation cable used during service times                |
| <b>18015-RC</b>  | Replacement cable and crimp 16-18 in. long                        |

### Product Information


This sturdy, tamper resistant, self-contained device helps prevent the theft or vandalism of fire extinguishers. Experience has shown its highly visible "stop sign" design is itself an effective deterrent. The device contains a 9 VDC battery (included), a selectable 95 or 105 dB horn and a unique steel cable operated switch mechanism. When the extinguisher is removed, the galvanized steel cable is pulled out of the alarm and the horn sounds.

- Reduces theft of vital fire extinguishers
- Reduces vandalism of fire extinguishers
- Completely self-contained
- Permitted by fire marshals because it does not interfere with fire fighting in any way
- Remote powered 12 VDC version available
- Lifetime warranty against breakage of polycarbonate housing

**NOTE:** Verify if Authority Having Jurisdiction requires licensed extinguisher technician to install. End user must verify the alarm and battery every six months and replace battery annually or as required.

### SPECIFICATIONS

|                                   |                                                             |
|-----------------------------------|-------------------------------------------------------------|
| Housing                           | 1/8 in. Polycarbonate                                       |
| Power Source                      | 9 VDC Alkaline                                              |
| Warning Horn at 1 foot            | 95 dB - Low<br>105 dB - High                                |
| Cable                             | 1/8 in. galvanized steel<br>16 to 18 in. long               |
| Dimensions                        | 5.375 in. W x 5.375 in. H x 2 in. D<br>137mm x 137mm x 51mm |
| Standby Current                   | None                                                        |
| Alarm Current                     | 40 mA at 95 dB<br>150 mA at 105 dB                          |
| Recommended Operating Temperature | 32°F to 120°F<br>(0°C to 49°C)                              |

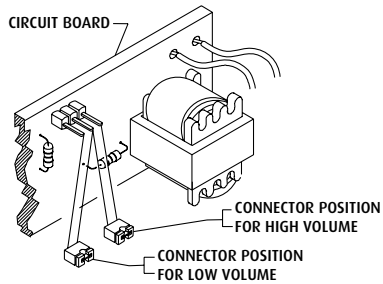

VIEW SHOWING JUMPER LOCATION FOR VOLUME SETTINGS

THREAD CABLE INTO THEFT STOPPER UNTIL CABLE BOTTOMS OUT (TO TEST, SIMPLY PULL CABLE AND HORN WILL SOUND)

