

Strike First
Corporation of
America



Full Line of Quality Hand Portable Fire Protection Equipment
1-800-255-5515 or www.strikefirstusa.com

WARRANTY

Strike First Corporation of America

Extinguisher Warranty

Strike First Corporation warrants its fire extinguishers to be free from defects in material and workmanship for a period of six years from the date of purchase. During the warranty period, any such defects will be repaired or the defective extinguisher

replaced (IF THE ORIGINAL SEAL IS INTACT AND/OR IF ONLY FACTORY REPLACEMENT PARTS HAVE BEEN USED TO SERVICE THE EXTINGUISHER). This warranty does not cover defects resulting from modifications, alteration, misuse, exposure to corrosive conditions or improper installation or maintenance. **ALL IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO WARRANTIES OF FITNESS FOR PURPOSE AND MERCHANTABILITY ARE LIMITED TO THE TIME PERIOD AS STATED ABOVE. IN NO EVENT SHALL STRIKE FIRST CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.** Strike First Corporation neither assumes nor authorizes any representative or other person to assume for it any obligation or liability other than as expressly set forth herein. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

Fire Extinguisher Cabinet Warranty

The Strike First Corporation of America (the "Seller") provides the following warranty of its cabinets: All cabinets sold hereunder are warranted to be free from defects in material and workmanship for a period of one (1) year. The purchaser agrees that he will inspect the goods upon delivery. Every claim for defective material or workmanship or negligence or from any other cause shall be deemed waived by the purchaser unless made to the Seller in writing within ninety (90) days of the date of shipment from purchaser to purchasers' customer provided that all such claims for goods restocked for resale must be submitted in writing to the Seller within one (1) year from receipt by purchaser of the goods to which such claims relate. Defective goods for which a valid claim has been made shall be returned to the Seller and defective goods so returned will be replaced or repaired without charge, but the Seller shall not be liable for any other loss, damage or expense, **INCLUDING BUT NOT LIMITED TO CONSEQUENTIAL DAMAGES**, directly or indirectly arising from the condition or use of the goods or from any other cause, the exclusive remedy against the Seller being to require the replacement or repair of defective goods. **THIS WARRANTY IS THE SOLE AND EXCLUSIVE WARRANTY PROVIDED TO THE PURCHASER. THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE DESCRIPTION OF THE FACE HEREOF. THE SELLER HEREBY DISCLAIMS ALL OTHER WARRANTIES, EXPRESS AND IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

ADA COMPLIANCE

ADA ACCESSIBLE GUIDELINE 4.4

Cabinets and Fire Extinguishers projecting from walls with their leading edges between 27 inches and 80 inches above the finished floor shall protrude no more than 4 inches into walks, halls, corridors, passageways, or aisle. Objects mounted with their leading edges at or below 27 inches above the finished floor may protrude any amount. Freestanding objects mounted on posts or pylons may overhang 12 inches maximum from 27 inches to 80 inches above the ground or finished floor. Protruding objects shall not reduce the clear width of an accessible route or maneuvering space.

To comply with ADA Guidelines, Strike First Extinguishers and Cabinets offer handles, brackets and return trims according to instructions provided by installer. For ADA compliance follow the specification ordering process dimensions in our catalog. Proper installation in accordance with the ADA Guidelines is the sole responsibility of the installer. For more information please visit the Accessibility Guidelines for Buildings and Facilities website or call them at 1-800-872-2253.



ADA handle option

TABLE of CONTENTS

Warranty	2
ADA Compliance	2
Specification Guidelines	3
Ordering Procedure	3
Important Information	3
Cabinet Measuring Guidelines	4
Installation Options	4
Fire-Rated Installation Guidelines	4
EXTINGUISHER CABINETS	
Elite Architectural Series Cabinets	5
Sonoma Extinguisher Cabinets	6
Titan Series Aluminum Cabinets	7
Classic Series Cabinets	8
Bubble Canopy Series Cabinets	9
Valve Series Cabinets	10
DFB Fiberglass Defibulator Cabinet	10
FEB25-Fiberglass Cabinet	11
Plastic Extinguisher Cabinets	11
Heavy Duty Outdoor Cabinets	12
Outdoor Weatherproof Hose Cabinets	13
Fire Hose and Hydrant House	14
Accessories for Extinguisher Cabinets	14
Mini Theft Stopper	14
FIRE EXTINGUISHERS	
ABC Fire Extinguishers	15
Extinguisher CAPE	15
CO ₂ Aluminum Fire Extinguishers	16
ABC 30lb Extinguisher	16
30lb Wheeled Trolley Cart	16
Class-K Kitchen Fire Extinguishers	17
PW-240 Water Fire Extinguishers	17
Accessories for Fire Extinguishers	18
EMERGENCY LIGHTING PRODUCTS	
LED Exit Signs	19
Photoluminescent Signs	19
Non-Photoluminescent Decal	19
SAFETY STORAGE PRODUCTS	
Flammable Liquid Cabinets	20
Acid & Corrosive Cabinets	21
Paint & Ink Cabinets	22
Poly Acid/Corrosive Cabinets	22
Drum/Haz-Mat Cabinets	22
The Centurion Portable Extinguisher Stand	23


SPECIFICATION GUIDELINES

HOW TO SPECIFY YOUR CABINET Follow the steps on each product page:

- Choose the Extinguisher Size (1)
- Choose the Cabinet Style (2)
- Choose the Door Style (3)
- Choose the Appropriate Series (4)
- Choose the Cabinet Type (5)
- Choose the Options listed below (6-9)

ORDERING PROCEDURE

Model Numbers - Fire Extinguisher Cabinets



Specify SG when fire-rated

- (1) Extinguisher Size:5 = 5lb
 1 = 10lb
 2 = 20lb
- (2) Cabinet Style:0 = Surface (S)
 1 = Semi-Recessed (SR)
 2 = Fully-Recessed (FR)
- (3) Door Style:6 = Full Glass (FG)
 7 = Full Metal (FM)
 8 = Vertical Duo (VD)
 9 = Center Duo (CD)
 10 = Horizontal Duo (HD)
- (4) Series:EL = Elite Series
 BC = Bubble Series
 SN = Sonoma Series
 VC = Valve Series
 TN = Titan Series Aluminum
- (5) Cabinet Type: **SG = SAFEGUARD** (fire rated)

Options

- (6) Finish Options:.....SSF = Stainless Steel Front
 FSS = Full Stainless Steel
 AL = Aluminum Front (w/steel tub)
 FAL = Full Aluminum (front and tub)
 RD = Red Coated
- (7) Handle Options:.....008 = Safety Break Lock
 009 = Center Duo Safety Lock
 010 = Aluminum Die Cast Red
 "Fire" Handle
 012 = ADA Handle
- (8) Glazing:G11 = Clear Acrylic (Standard)
 G12 = Clear Tempered Glass
- (9) Lettering*:003 = Decal "Fire Ext." Sm Vert R/B
 004 = Decal "Fire Ext." Lrg Vert R/B
 005 = Decal "Fire Ext." Sm Horiz R/B
 006 = Decal "Fire Ext." Lrg Horiz R/B
 *Please indicate **Red** or **Black** lettering.



Full Glass (style 6)
ELITE Series



Red Coat Option
ELITE Series



Full Metal (style 7)
SONOMA Series



Center Duo (style 9)
ELITE Series



Vertical Duo (style 8)
ELITE Series



Aluminum Full Glass (style 6)
TITAN Series



Bubble Canopy (BC)



Classic Series
White




Plastic Cabinet
Red or White

IMPORTANT INFORMATION


PLEASE NOTE: We have made every effort to make this catalog complete and accurate. We reserve the right to make changes at any time, without notice, in prices, materials, equipment, specifications, models and availability. Specifications, dimensions, measurements, and other numbers in this catalog and other printed materials provided regarding these products are approximates based upon design and engineering drawings and prototypes. Your specific cabinet may differ slightly due to variations in manufacturing and equipment. In addition, some information may have been updated since the time of printing. Please contact customer service for complete details on all products.

CABINET MEASURING GUIDELINES

Fire Rating Assembly

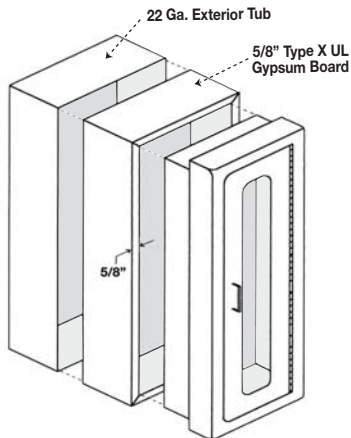


Non-Rated



ELITE Series cabinet fronts are 16 gauge cold rolled steel with 22 gauge cold rolled steel tubs. Features full length piano type hinge.

How to Measure a Cabinet

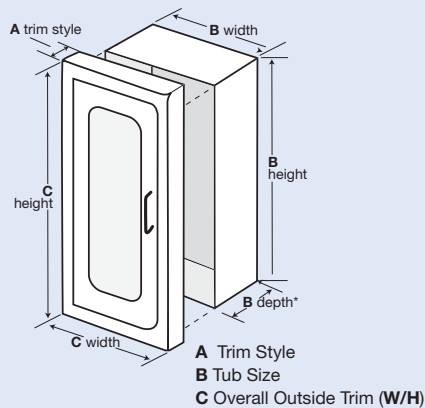


Rough opening for all cabinets should be 1/4" larger than actual tub size.

Trim Style measurement varies depending on the type and size of cabinet. **ELITE** series semi-recessed is 1 1/2" for 5lb., 2 1/2" for 10lb, and 3" for 20lb. Fully recessed is 1/4" for all sizes. **ELITE** series fire rated semi-recessed is 1 1/2" for 5lb., 3" for 10lb., and 4" for 20lb. Fire-rated fully recessed is 1/4" for all sizes.


TITAN series aluminum cabinets are only available in the 10lb with the same trim sizes as the ELITE series. **SONOMA** series cabinets are all trimless.

For more information on measuring and specifying the size of cabinet you need, contact our customer service department.

SONOMA Series Fire Rating Assembly

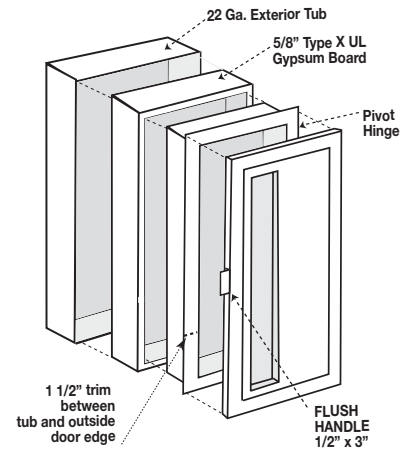

SONOMA Series Non-Rated



SONOMA Series cabinets are fully recessed and have a concealed hinge.

INSTALLATION OPTIONS

Installs in
concrete, masonry,
wood, and metal
stud walls

Top View	Semi-Recessed		Fully-Recessed		Bubble Cabinet	Valve Cabinet	Valve & Extinguisher Cabinet
Surface	1 1/2" Return Trim 5lb. Only *Note: 1 1/2" Return Trim on 5lb Safeguard		1/4" Return Trim		1" Return Trim on 20lb 1-1/2" Return Trim on 10lb See Bubble Extensions below	1/4" Return Trim	Fully-Recessed 1/2" Return Trim
Side View	2-1/2" Return Trim *Note: 3" Return Trim Standard on 10lb. Safeguard		1 3/4" for 10lb 2 3/4" for 20lb		1 3/4" for 10lb 2 3/4" for 20lb	9"	6"




UL Classified 5/8" Type X gypsum board inserted in the cavity between the two layers. Warnock Hersey has approved the Safeguard Cabinets to be mounted in any face of fire rated steel or wood stud for up to 2 hour rated walls without affecting its fire rating. The above meets the requirement test ASTM-E119-98 with test report WHI-495-1534. MOUNTING INSTRUCTIONS are supplied with each safeguard cabinet.


SAFEGUARD

Typical Semi-Recessed Fire Rated Installation

ONE HOUR FIRE WALL SYSTEM

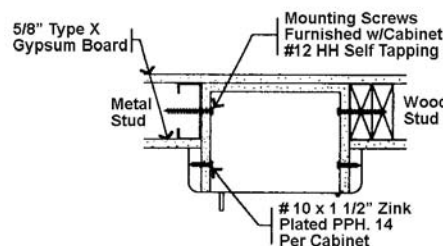

TWO HOUR FIRE WALL SYSTEM

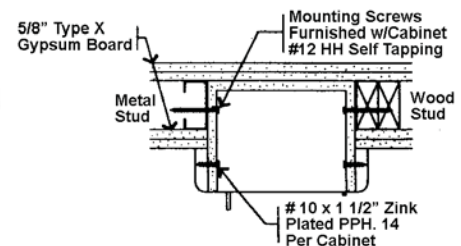

EL-ELITE ARCHITECTURAL Series Fire Extinguisher Cabinets

ELITE (EL) cabinet fronts are 16 gauge cold rolled steel with 22 gauge cold rolled steel tubs. Fronts are baked white enamel over rust inhibiting phosphate treated steel. All semi-recessed fronts have radius corners except the 5lb cabinets have a 1 1/2" square trim. Stainless steel fronts come standard with white steel tubs. For full aluminum cabinets see page 7. All cabinets come standard with chrome handles and clear acrylic glazing.

SPECIFICATION PROCESS: Follow the steps below to specify your cabinet.
See detail legend on page 3.

STEP 1: EXTINGUISHER SIZE:

5 - 5 lb. 1 - 10 lb. 2 - 20 lb.

STEP 2: CABINET STYLE:

0 - Surface Mounted (**S**)
1 - Semi-Recessed (**SR**)
2 - Fully-Recessed (**FR**)

STEP 3: DOOR STYLE:

6 - Full Glass (**FG**)
7 - Full Metal (**FM**)
8 - Vertical Duo (**VD**)
9 - Center Duo (**CD**)
10 - Horizontal Duo (**HD**)

STEP 4: SERIES:

EL - Elite

STEP 5: CABINET TYPE:

SG - SAFEGUARD - Fire Rated


STEP 6: FINISH OPTIONS:

SSF - Stainless Steel Front

FSS - Full Stainless Steel

RD - Red Coated

STEP 7: HANDLE OPTIONS:

008 - Safety Break Lock
009 - Center Duo Safety Lock
010 - Alum. Die Cast Red "Fire" Handle
012 - ADA Handle
(see page 2 for guidelines) 


STEP 8: GLAZING:

G11 - Clear Acrylic (Standard)
G12 - Clear Tempered Glass

STEP 9: LETTERING:

002 - Decal "Pull Firmly" *R only*
003 - Decal "Fire Ext." Sm Vert *R/B*
004 - Decal "Fire Ext." Lrg Vert *R/B*
005 - Decal "Fire Ext." Sm Horiz *R/B*
006 - Decal "Fire Ext." Lrg Horiz *R/B*



Mod. #	Interior Tub Size			Overall Outside Trim		NON-RATED Rough Opening			NON-RATED Trim Style	WARROCK RESEY LISTED	SAFEGUARD Rough Opening 			SAFEGUARD Trim Style	Accom. Ext Size
	W	H	D	W	H	W	H	D			W	H	D		Lbs.
Surface Mounted															
506-EL	8"	17"	5"	8 1/2"	17 1/2"	-	-	-	-	-	-	-	-	-	5
507-EL	8"	17"	5"	8 1/2"	17 1/2"	-	-	-	-	-	-	-	-	-	5
508-EL	8"	17"	5"	8 1/2"	17 1/2"	-	-	-	-	-	-	-	-	-	5
106-EL	9 1/2"	24"	6"	10"	24 1/2"	-	-	-	-	-	-	-	-	-	10
107-EL	9 1/2"	24"	6"	10"	24 1/2"	-	-	-	-	-	-	-	-	-	10
108-EL	9 1/2"	24"	6"	10"	24 1/2"	-	-	-	-	-	-	-	-	-	10
206-EL	12"	27"	8"	12 1/2"	27 1/2"	-	-	-	-	-	-	-	-	-	20
207-EL	12"	27"	8"	12 1/2"	27 1/2"	-	-	-	-	-	-	-	-	-	20
208-EL	12"	27"	8"	12 1/2"	27 1/2"	-	-	-	-	-	-	-	-	-	20
Semi-Recessed															
516-EL	8"	17"	5"	10 3/4"	19 3/4"	8 1/4"	17 1/4"	3 1/2"	1 1/2"	9 3/4"	18 3/4"	4"	1 1/2"	5	
517-EL	8"	17"	5"	10 3/4"	19 3/4"	8 1/4"	17 1/4"	3 1/2"	1 1/2"	9 3/4"	18 3/4"	4"	1 1/2"	5	
518-EL	8"	17"	5"	10 3/4"	19 3/4"	8 1/4"	17 1/4"	3 1/2"	1 1/2"	9 3/4"	18 3/4"	4"	1 1/2"	5	
116-EL	9 1/2"	24"	6"	13 1/2"	28 1/2"	9 3/4"	24 1/4"	3 1/2"	2 1/2"	11 1/4"	25 3/4"	3 3/4"	3"	10	
117-EL	9 1/2"	24"	6"	13 1/2"	28 1/2"	9 3/4"	24 1/4"	3 1/2"	2 1/2"	11 1/4"	25 3/4"	3 3/4"	3"	10	
118-EL	9 1/2"	24"	6"	13 1/2"	28 1/2"	9 3/4"	24 1/4"	3 1/2"	2 1/2"	11 1/4"	25 3/4"	3 3/4"	3"	10	
216-EL	12"	27"	8"	16"	31"	12 1/4"	27 1/4"	5"	3"	13 1/2"	28 3/4"	4 3/4"	4"	20	
217-EL	12"	27"	8"	16"	31"	12 1/4"	27 1/4"	5"	3"	13 1/2"	28 3/4"	4 3/4"	4"	20	
218-EL	12"	27"	8"	16"	31"	12 1/4"	27 1/4"	5"	3"	13 1/2"	28 3/4"	4 3/4"	4"	20	
Fully-Recessed															
526-EL	8"	17"	5"	12"	21"	8 1/4"	17 1/4"	4 3/4"	1/4"	9 3/4"	18 3/4"	5 1/2"	1/4"	5	
527-EL	8"	17"	5"	12"	21"	8 1/4"	17 1/4"	4 3/4"	1/4"	9 3/4"	18 3/4"	5 1/2"	1/4"	5	
528-EL	8"	17"	5"	12"	21"	8 1/4"	17 1/4"	4 3/4"	1/4"	9 3/4"	18 3/4"	5 1/2"	1/4"	5	
126-EL	9 1/2"	24"	6"	14"	28 1/2"	9 3/4"	24 1/4"	5 3/4"	1/4"	11 1/4"	25 3/4"	6 1/2"	1/4"	10	
127-EL	9 1/2"	24"	6"	14"	28 1/2"	9 3/4"	24 1/4"	5 3/4"	1/4"	11 1/4"	25 3/4"	6 1/2"	1/4"	10	
128-EL	9 1/2"	24"	6"	14"	28 1/2"	9 3/4"	24 1/4"	5 3/4"	1/4"	11 1/4"	25 3/4"	6 1/2"	1/4"	10	
226-EL	12"	27"	8"	16"	31"	12 1/4"	27 1/4"	7 3/4"	1/4"	13 1/2"	28 3/4"	8 1/2"	1/4"	20	
227-EL	12"	27"	8"	16"	31"	12 1/4"	27 1/4"	7 3/4"	1/4"	13 1/2"	28 3/4"	8 1/2"	1/4"	20	
228-EL	12"	27"	8"	16"	31"	12 1/4"	27 1/4"	7 3/4"	1/4"	13 1/2"	28 3/4"	8 1/2"	1/4"	20	

SN-SONOMA Series Extinguisher and Valve Cabinets



SONOMA Series (SN) cabinet fronts are 18 gauge cold rolled steel with 22 gauge cold rolled steel tubs, are fully recessed and have a concealed hinge. The Sonoma's aesthetically clean and trim appearance blends in with any decor. The cabinet design and appearance is superior for use in ultra modern interior designed commercial facilities. All Sonoma cabinets come standard with flush Sonoma handle.

SPECIFICATION PROCESS: Follow the steps below to specify your cabinet.
See detail legend on page 3.

STEP 1: EXTINGUISHER SIZE:
1 - 10 lb. 2 - 20 lb.

STEP 2: CABINET STYLE:
2 - Fully-Recessed (FR)

STEP 3: DOOR STYLE:
7 - Full Metal (FM)
8 - Vertical Duo (VD)

STEP 4: SERIES:
SN - Sonoma Cabinet
VC - Valve Cabinet


STEP 5: CABINET TYPE:
SG - SAFEGUARD - Fire Rated

STEP 6: FINISH OPTIONS:
SSF - Stainless Steel Front
FSS - Full Stainless Steel
BT - Black Tub


STEP 7: HANDLE OPTIONS:
013 - Sonoma Stainless Steel Flush Handle (Standard)

STEP 8: GLAZING:
G11 - Clear Acrylic (Standard)
G12 - Clear Tempered Glass



STEP 9: LETTERING:
004 - Decal "Fire Ext." Lrg Vert R/B



Flush handle
is 1/2" x 3"



Safeguard Valve Knockout Drilling: No knockouts are provided with Sonoma Safeguard Valve Cabinets. Find the exact location of the pipe(s) which enter the cabinet and mark the cabinet tub appropriately. Both outside and inside tubs and insulation material must be completely open to receive pipe(s).

Mod. #	Trim Style	Interior Tub Size			Overall Outside Trim		NON-RATED Rough Opening			 SAFEGUARD Rough Opening 	Knockout Location		Accom. Ext Size	
		W	H	D	W	H	W	H	D	W	H	D	A B	Lbs.
Fully-Recessed														
127-SN	trimless	9 1/2"	24"	6"	13 1/4"	27 3/4"	9 3/4"	24 1/4"	5 3/4"	11 1/2"	26"	6 3/4"	–	10
128-SN	trimless	9 1/2"	24"	6"	13 1/4"	27 3/4"	9 3/4"	24 1/4"	5 3/4"	11 1/2"	26"	6 3/4"	–	10
227-SN	trimless	12"	27"	8"	15 3/4"	30 3/4"	12 1/4"	27 1/4"	7 3/4"	13 1/2"	28 3/4"	8 3/4"	–	20
228-SN	trimless	12"	27"	8"	15 3/4"	30 3/4"	12 1/4"	27 1/4"	7 3/4"	13 1/2"	28 3/4"	8 3/4"	–	20
Valve Cabinet														Angle Valve
VC-SN	trimless	18"	18"	8"	20 3/4"	20 3/4"	19 1/4"	18 1/4"	8"	20"	20"	9"	9" 4"	2 1/2"

TN-TITAN Series Aluminum Extinguisher Cabinets

Titan Series (TN) Aluminum cabinets are constructed of non-extruded .063 thick aluminum with grey finish powder coat. All non-rated cabinets come standard with aluminum tubs, chrome steel handles and clear acrylic glazing. Fire-rated cabinets come standard with steel tubs, chrome steel handles and clear acrylic glazing.

SPECIFICATION PROCESS: Follow the steps below to specify your cabinet.

STEP 1: EXTINGUISHER SIZE:
1 - 10 lb.

STEP 2: CABINET STYLE:
0 - Surface Mounted (S)
1 - Semi-Recessed (SR)
2 - Fully-Recessed (FR)

STEP 3: DOOR STYLE:
6 - Full Glass (FG)
7 - Full Metal (FM)
8 - Vertical Duo (VD)

STEP 4: SERIES:
TN - Aluminum Cabinet

STEP 5: CABINET TYPE:
SG - SAFEGUARD - Fire Rated
with steel tub

STEP 6: FINISH OPTIONS:
AL - Aluminum Front (w/steel tub)
FAL - Full Aluminum (front and tub)

STEP 7: HANDLE OPTIONS:
008 - Safety Break Lock
010 - Alum. Die Cast Red "Fire" Handle
012 - ADA Handle

STEP 8: GLAZING:
G11 - Clear Acrylic (standard)
G12 - Clear Tempered Glass

STEP 9: LETTERING:
002 - Decal "Pull Firmly" *R only*
004 - Decal "Fire Ext." Lrg Vert *R/B*
005 - Decal "Fire Ext." Sm Horiz *R/B*
006 - Decal "Fire Ext." Lrg Horiz *R/B*

Return trim is a rolled edge, polished to a smooth finish.

Chrome steel handle and clear acrylic glazing comes standard.



Mod. #	Interior Tub Size			Overall Outside Trim		FAL (aluminum front and tub) Rough Opening			FAL (aluminum front and tub) Trim Style	SAFEGUARD - AL (aluminum front and steel tub) Rough Opening			SAFEGUARD AL (aluminum front and steel tub) Trim Style	Accom. Ext Size
	W	H	D	W	H	W	H	D		W	H	D		Lbs.
Surface Mounted														
106-TN	9 1/2"	24"	6"	10"	24 1/2"	-	-	-	-	-	-	-	-	10
107-TN	9 1/2"	24"	6"	10"	24 1/2"	-	-	-	-	-	-	-	-	10
108-TN	9 1/2"	24"	6"	10"	24 1/2"	-	-	-	-	-	-	-	-	10
Semi-Recessed														
116-TN	9 1/2"	24"	6"	13 1/2"	28 1/2"	9 3/4"	24 1/4"	3 1/2"	2 1/2"	11 1/4"	25 3/4"	3 3/4"	3"	10
117-TN	9 1/2"	24"	6"	13 1/2"	28 1/2"	9 3/4"	24 1/4"	3 1/2"	2 1/2"	11 1/4"	25 3/4"	3 3/4"	3"	10
118-TN	9 1/2"	24"	6"	13 1/2"	28 1/2"	9 3/4"	24 1/4"	3 1/2"	2 1/2"	11 1/4"	25 3/4"	3 3/4"	3"	10
Fully-Recessed														
126-TN	9 1/2"	24"	6"	14"	28 1/2"	9 3/4"	24 1/4"	5 3/4"	1/4"	11 1/4"	25 3/4"	6 1/2"	1/4"	10
127-TN	9 1/2"	24"	6"	14"	28 1/2"	9 3/4"	24 1/4"	5 3/4"	1/4"	11 1/4"	25 3/4"	6 1/2"	1/4"	10
128-TN	9 1/2"	24"	6"	14"	28 1/2"	9 3/4"	24 1/4"	5 3/4"	1/4"	11 1/4"	25 3/4"	6 1/2"	1/4"	10

Classic Series Cabinets

CLASSIC Series cabinets are an economical choice. 20 gauge cold rolled steel. These surface mounted and semi-recessed cabinets offer a clean appearance and come complete with breaker bar, safety locks, acrylic viewing panels and break glass decal.



999
Surface



100 SR
Semi-Recessed



999
Surface
Red Option



008 (See page 14)




011 (See page 14)





Replacement Acrylic,
scored or unscored
(decals sold separately
on page 14)



SURFACE
(FOR 5, 10, AND
20 LB.)



SEMI-RECESSED
999-SR (10 LB) ROUGH OPENING DIMENSIONS

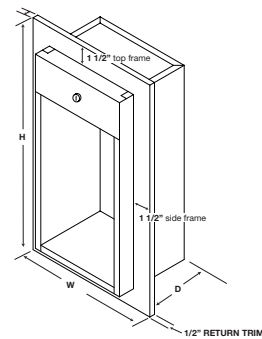

SEMI-RECESSED
100-SR (5 LB.) OUTSIDE DIMENSIONS

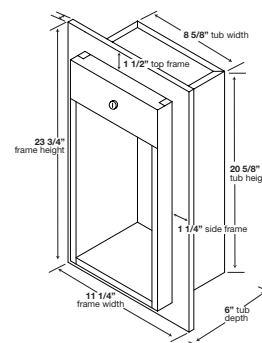

Mod. #	Trim Style	Interior Tub Size			Overall Outside Trim		Rough Opening			Accom. Ext Size
		W	H	D	W	H	W	H	D	Lbs.
Surface Mounted										
100	–	8 3/4"	20"	5 3/4"	–	–	–	–	–	5
999	–	10 1/2"	24"	6"	–	–	–	–	–	10
104	–	13 3/4"	29 3/4"	8 3/4"	–	–	–	–	–	20
Semi-Recessed										
100-SR	–	8 3/4"	20"	5 3/4"	11 3/4"	23 1/8"	9 1/4"	20 3/4"	3 1/2"	5
999-SR	–	10 1/2"	24"	6"	13 3/4"	27 1/2"	10 3/4"	24 1/2"	3 1/2"	10
Replacement Acrylic		Acrylic Size								
Acrylic 100	–	8 3/4"	18"	–	Scored/unscored replacement acrylic					
Acrylic 999	–	10 1/2"	21 3/4"	–	Scored/unscored replacement acrylic					
Acrylic 104	–	14"	27 1/2"	–	Scored/unscored replacement acrylic					


BC-Bubble Canopy Series Cabinets

Bubble Canopy (BC) cabinet fronts are 16 gauge cold rolled steel with 22 gauge cold rolled steel tubs. Cabinets offer a sleek design including a convex acrylic bubble door extending out from the trim, permitting 180° of visibility for quick identification of the extinguisher.

SPECIFICATION PROCESS: Follow the steps below to specify your cabinet. See detail legend on page 3.

- STEP 1: EXTINGUISHER SIZE:** FSS - Full Stainless Steel
1 - 10 lb. 2 - 20 lb. RD - Red Coated
- STEP 2: CABINET STYLE:** 008 - Safety Break Lock
1 - Semi-Recessed (SR) 010 - Alum. Die Cast Red
2 - Fully-Recessed (FR) "Fire" Handle
012 - ADA Handle (see page 2)
- STEP 3: DOOR STYLE:** N/A - Bubble Only
- STEP 4: SERIES:** BC - Bubble Cabinet
- STEP 5: CABINET TYPE:** 004 - Decal "Fire Ext." Lrg Vert R/B
SG - SAFEGUARD - Fire Rated 006 - Decal "Fire Ext." Lrg Horiz R/B
- STEP 6: FINISH OPTIONS:** SSF - Stainless Steel Front

Non-Rated




1" Return Trim on 20 lb. Cabinet Semi-Recessed

1 1/2" Return Trim on 10 lb. Cabinet. Semi-Recessed



21-BC

SAFEGUARD Fire Rating Assembly

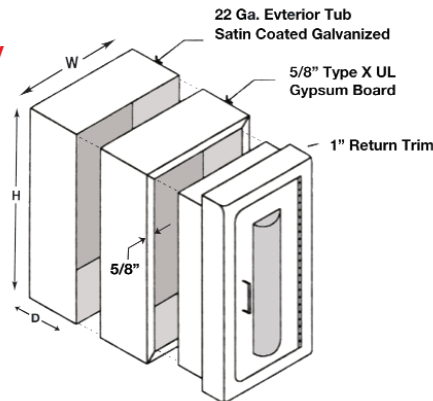

Decals on page 14



115



004





003



Replacement Acrylic (decal sold separately on page 14)

WARNOCK HERSEY LISTED UL Classified 5/8" Type X gypsum board inserted in the cavity between the two layers. Warnock Hersey has approved the Safe-guard Cabinets to be mounted in any face of fire rated steel or wood stud for up to 2 hour rated walls without affecting its fire rating. The above meets the requirement test ASTM-E119-98 with test report WHI-495-1534. mounting INSTRUCTIONS are supplied with each safeguard cabinet.

Mod. #	Interior Tub Size			Overall Outside Trim		NON-RATED Rough Opening			NON-RATED Trim Style	 SAFEGUARD Rough Opening 	SAFEGUARD Trim Style	Accom. Ext Size		
	W	H	D	W	H	W	H	D		W	H	D		Lbs.
Surface Mounted (Non-fire rated)														
10-BC	10 1/2"	24"	4 1/2"	11"	24 1/2"	–	–	–	–	–	–	–	–	10
Semi-Recessed														
11-BC	10 1/2"	23 3/4"	4 1/2"	14 1/2"	28"	10 3/4"	24 1/4"	3"	1 1/2"	12 1/4"	25 3/4"	3 3/4"	1 1/2"	10
21-BC	14"	30"	4 3/4"	18 1/2"	34"	14 3/4"	30 1/4"	4 1/4"	1"	16 1/4"	31 3/4"	5"	1"	20
Fully-Recessed														
12-BC	10 1/2"	24"	4 1/2"	14 1/2"	28"	10 3/4"	24 1/4"	4 1/2"	1/4"	12 1/4"	25 3/4"	5 1/4"	1/4"	10
Replacement Bubble*														
AC-Bubble 10	6 3/4"	21 1/2"	1 3/4"	Breakable Acrylic										
AC-Bubble 20	8 1/2"	22 1/4"	2 3/4"	Breakable Acrylic										
Poly-Bubble 10	6 3/4"	21 1/2"	1 3/4"	Non-Break Polycarbonate										
Poly-Bubble 20	8 1/2"	22 1/4"	2 3/4"	Non-Break Polycarbonate										

*Other sizes are available upon request

VC-Valve Series Cabinets



26-VC
red option




26-VC

Valve Cabinet (VC) fronts are 16 gauge cold rolled steel with 22 gauge cold rolled steel tubs and are available with a full metal or full glass door panel.

SPECIFICATION PROCESS: Follow the steps below to specify your cabinet. See detail legend on page 3.

- STEP 1: EXTINGUISHER SIZE:**
Not Applicable
- STEP 2: CABINET STYLE: ***
2 - Fully-Recessed (FR)
- STEP 3: DOOR STYLE:**
6 - Full Glass (FG)
7 - Full Metal (FM)
- STEP 4: SERIES:**
VC - Valve Cabinet
- STEP 5: CABINET TYPE:**
SG - SAFEGUARD - Fire Rated
- STEP 6: FINISH OPTIONS:**
SSF - Stainless Steel Front
FSS - Full Stainless Steel
RD - Red Coated (VC-Standard)
- STEP 7: HANDLE OPTIONS:**
008 - Safety Break Lock
- STEP 8: GLAZING:**
G11 - Clear Acrylic (Standard)
G12 - Clear Tempered Glass
- STEP 9: LETTERING:**
007 - Decal "Fire Department Valve"

SAFEGUARD Valve Knockout Drilling: No knock-outs are provided with Safeguard Valve Cabinets. Find the exact location of the pipe(s) which enter the cabinet and mark the cabinet tub appropriately. Both outside and inside tubs and insulation material must be completely open to receive pipe(s).



Mod. #	Interior Tub Size			Overall Outside Trim		NON-RATED Rough Opening			NON-RATED Trim Style	SAFEGUARD Rough Opening			SAFEGUARD Trim Style	Knockout Location		Accom. Ext. Size
	W	H	D	W	H	W	H	D		W	H	D		A	B	Lbs
Valve Cabinet Fully-Recessed																Angle Valve
26-VC	18"	18"	8"	22"	22"	18 1/4"	18 1/4"	7 3/4"	1/4"	19 5/16"	19 5/16"	8 1/2"	1/2"	9"	4"	1 1/2 - 2 1/2
27-VC	18"	18"	8"	22"	22"	18 1/4"	18 1/4"	7 3/4"	1/4"	19 5/16"	19 5/16"	8 1/2"	1/2"	9"	4"	1 1/2 - 2 1/2

* Surface Mounted (S) is available upon request

DFB-Fiberglass Defibrillator Cabinet

The **DFB** defibrillator cabinet made of durable fiberglass and designed to accommodate many types of defibrillators and AEDs for easy access in a central locations. Also protects from exposure to harsh UV rays, chemicals, moisture, dust, salt air, insects, and temperature extremes.

- Used by the U.S. Coast Guard
- Can be wall mounted, attached to handrails, bulkheads, or free standing
- Suitable for hospitals, ambulances, outpatient care facilities, GF practices, health clubs, sports facilities, public and private buildings, airplanes and other facilities where large groups of people gather
- Available in a variety of UV inhibiting colors as well as interiors designed to meet your specifications
- By Thomas Products



DFB-15

Mod. #	Trim Style	Interior Tub Size			Overall Outside Trim		Shipping Weight
		W	H	D	W	H	
Fiberglass Defibrillator Cabinet							
DFB15	—	14 3/4"	14 3/4"	9"	16 1/4"	16 1/4"	12


FEB25-Fiberglass Extinguisher Cabinet

The **Fiberglass** fire extinguisher cabinets are made from durable fiberglass and designed to accommodate most 30 pound extinguishers. It can be used for protecting all types of fire extinguishers including CO2 fire extinguishers. Cabinets are wall mountable and may be semi-recessed. The boxes are rugged and offer excellent protection from harsh environmental conditions while keeping your fire equipment safe from misuse. By Thomas Products

- **Used by the U.S. Coast Guard**
- Easy View Acrylic Window for Verification of Contents
- Solid Brass Grab Handles
- Full length Stainless Steel Hinges
- Stainless Steel Rivets and Quick-opening Latches
- Meets or Exceeds NEMA 4X Rating
- Standard Classification Emblems
- Choice of UV-Inhibited High Visibility Colors
- Chemical Resistant Construction

Optional Features:

- Lockable Latches
- Fire Retardant Construction
- Custom Design Shelving
- Stainless Steel Grab Handles
- Custom Classification Emblems

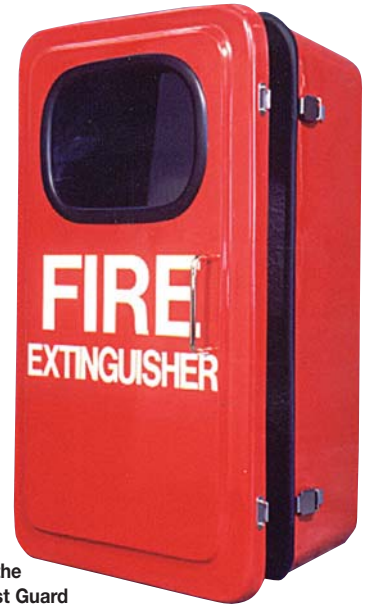

FEB25
Used by the
U.S. Coast Guard

Mod. #	Trim Style	Interior Tub Size			Overall Outside Trim		Shipping Weight	Accom. Ext. Size
		W	H	D	W	H	Lbs	Lbs
Fiberglass Extinguisher Cabinet								
FEB25	–	13"	24"	9 1/4"	15 1/4"	26"	15	up to 22" tall
FEB30	–	12 1/2"	28 1/2"	10 1/4"	14"	30 3/4"	21	up to 26 1/2" tall

PC-Plastic Extinguisher Cabinets

Plastic Cabinets (PC) with body and frame injection molded in red or white virgin high-impact crystal polystyrene of .110 wall thickness with ultra-violet inhibitors, virgin acrylic Plaskolite® panel of .080 thickness, cylinder lock and key, polypropylene plastic injected molded hammer with flexible torsion, ribbed grip surface, and clear nylon-jacketed stainless steel mechanical cable.



10011 (R or W)
Hammer Assembly (Included)



PC-105-10-R (Red)



PC-105-10-W (White)

Mod. #	Trim Style	Interior Tub Size			Overall Outside Trim		With Cover Outside Opening			Carton Amt	Accom. Ext Size
		W	H	D	W	H	W	H	D		Lbs
Plastic Fire Extinguisher Cabinets											
PC-105-5	–	6"	16 3/4"	5 3/8"	8"	19"	8 1/4"	19 1/4"	6 3/4"	12	5 or 2 1/2
PC-105-10	–	6 3/4"	20 1/2"	6"	9"	23"	9 1/4"	23 1/4"	7 1/4"	10	10
PC-105-20	–	9"	26"	8"	11"	28"	11 1/2"	28 1/2"	9 1/2"	6	20

*Fully assembled without extinguisher weight.


HDOC-Heavy Duty Outdoor Cabinet



HDOC-10



Heavy Duty Outdoor Cabinet (HDOC) is made from 16 gauge galvanized steel in a baked red acrylic enamel over phosphate treated steel. It includes weather resistive gasketing, full length stainless steel piano hinge with 2 roller ball catches, safety lock, a sloped roof to facilitate drainage, white "Fire Extinguisher" decal, "Pull Firmly to Open" decal, and stainless steel pull handle.

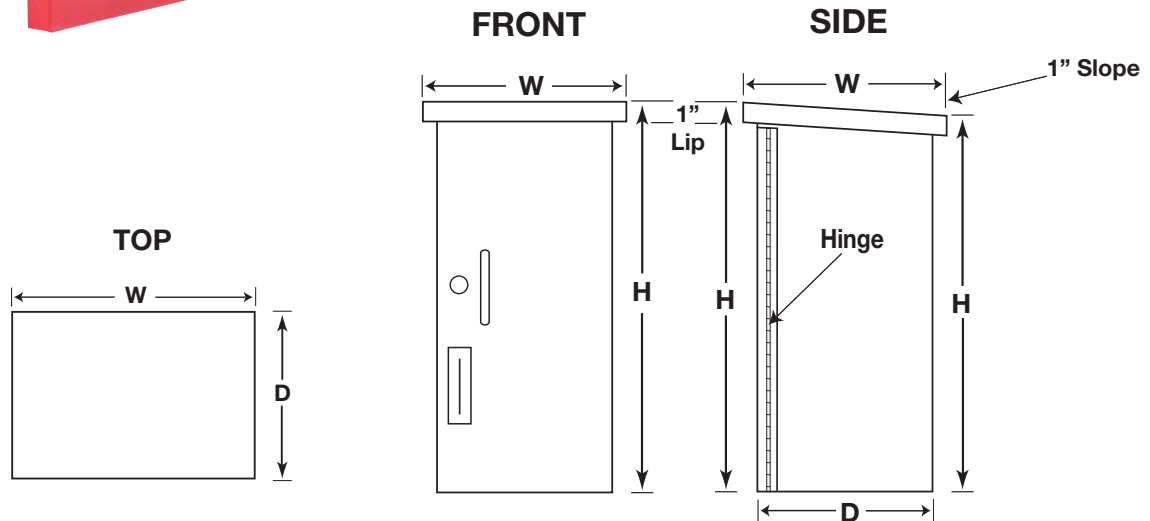

Mod. #	Trim Style	Interior Tub Size			Overall Outside Trim		Shipping Weight	Accom. Ext. Size
		W	H	D	W	H	Lbs	Lbs
Heavy Duty Outdoor								
HDOC-10	–	11 1/2"	24"	7 3/4"	12"	25"	30	5 & 10
HDOC-20	–	14"	28"	9"	14"	28"	35	20
HDOC-30	–	14"	33"	9"	14"	33"	40	30

Outdoor Weatherproof Hose Storage

CM-Outdoor Hose Storage cabinet, constructed of 16 ga. satin coat galvanized metal with two coats of red baked enamel. Stainless steel piano hinges with chrome plated door latches. Used to store fire hose and equipment for outdoor use in industrial applications.

Product Features:

- 16 ga. galvanized steel sheet throughout, weighs 250lbs
- 2 shelves 13" deep with 3/4" lip
- 2" slope on roof
- Rain trough over doors
- Door reinforcement at front, top and bottom
- Doors overlap tub at hinge side
- Piano hinge on both doors
- Door lock (R.H. door only)
- Chrome plated handle with 2 point catch
- Louvers on each end under bottom shelf (optional—please specify)
- Inside lips (front side)
- 3" at top 1 1/2" at bottom
- 1" at sides and bottom
- Two coats red baked enamel

To Specify:



- Wall Mounted (with rear lugs top & bottom)
- Concrete Base Mounted (with grouting lugs at bottom)
- Support Mounted - legs packed separately (Steel fabricated legs available 24", or 36")

Options:

- Additional shelves upon request
- Suitable mounting brackets for Accessories
- "Fire Hose" Decal



Example: CM-1101 shown with one shelf. Accessories not available.

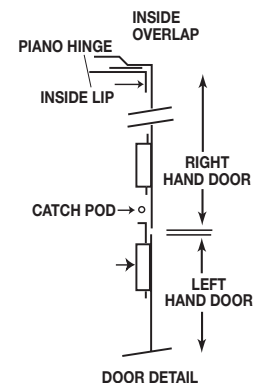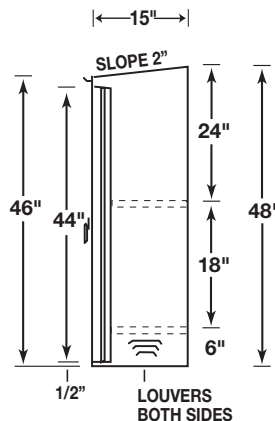


Please Note: Not suitable for sea water environment. We reserve the right to alter cabinet specifications and dimensions. Please contact our local representative for updated approval drawings prior to base construction and ordering.

Mod. #	Description	Shipping Weight
		Lbs.
Heavy Duty Outdoor		
CM1101	Weatherproof Hose & Storage Cabinet - w/12" legs (standard)	250
CM1101-24	Weatherproof Hose & Storage Cabinet - w/24" legs	255
CM1101-36	Weatherproof Hose & Storage Cabinet - w/36" legs	265

Hose and Hydrant House



HYDRANT

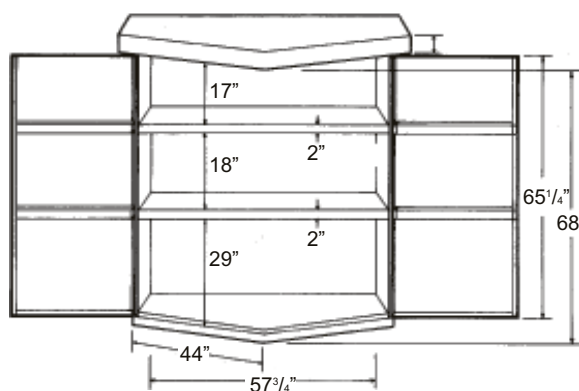

Hydrant House

- Used to enclose hydrant and store fire fighting equipment
- 16 gauge zinc satin coat sheet steel and ventilation louvers
- Spacious "walk-in" design features an open floor and two sturdy storage shelves
- Double doors furnished with heavy-duty piano hinges AND locking handle
- Unit is shipped knocked down with assembly instructions
- Finish: one coat grey primer and two coats of baked red enamel.

Model #	Description	Shipping Weight
Hose and Hydrant House		
HYDRANT	Fire Hydrant and Hose Storage House 65 3/4" W x 72" H x 67 1/4" D	600

Accessories for Extinguisher Cabinets


Handle, Locks, Breaker Bar, and Anti Theft



010



008



ST1-6255



011

Decals



115



003



007



001



005

Model. #	Accessories Description
Decals	
001	Classic Cabinet Series Decal "In Case of Fire Break Glass Fire Extinguisher"
003	Small Decal "Fire Extinguisher" Red or Black 1/2" x 11 1/2" (5lb. cabinets)
004	Large Decal "Fire Extinguisher" Red or Black 7/8" x 17" (10 & 20 lb cabinets)
005	Decal "Fire Extinguisher" Red or Black 8" x 7/8" horizontal
007	Decal "Fire Department Valve" <i>clear background</i>
115	Diecut Vertical "Fire Extinguisher" Decal Red or Black Small & Large
Handles, Locks, Breaker Bar, and Anti Theft	
008	Safety Break Lock w/2 keys
010	Aluminum Die Cast Red "FIRE" Handle
ST1-6255	Mini Theft Stopper "Stop"
011	Breaker Bar
Replacement Acrylic Elite Series	
Acrylic 5x20	Elite Series 5" x 20" unscored <i>not pictured</i>
Acrylic 4x13	Elite Series 4" x 13" unscored <i>not pictured</i>
Acrylic 8x23	Elite Series 8" x 23" unscored <i>not pictured</i>
Replacement Acrylic Classic and Bubble*	
Acrylic 100	Classic 8 3/4" x 18" scored or unscored
Acrylic 999	Classic 10 1/2 x 21 3/4" scored or unscored
Acrylic 104	Classic 14 x 27 1/2" scored or unscored
AC-Bubble 10	6 3/4" x 21 1/2" x 1 3/4" breakable*
AC-Bubble 20	8 1/2" x 22 1/4" x 2 3/4" breakable*
Poly-Bubble 10	6 3/4" x 21 1/2" x 1 3/4" non-breakable*
Poly-Bubble 20	8 1/2" x 22 1/4" x 2 3/4" non-breakable*

*Special size bubbles are available upon request.

Replacement Acrylic



Classic Acrylic
scored or unscored
(decal sold separately)



Bubble Acrylic*

ABC-Seamless Steel Cylinder Dry Chemical Fire Extinguishers

ABC Steel Cylinder Dry Chemical

- Manufactured and tested to the following standards: ANSI/UL 711, ANSI/UL 299
- Durable polyester powder paint
- Polyester powder coated steel handles
- Full hand grip for ease of operation
- Oversized stainless steel pull pin
- Comes complete with wall or vehicle bracket
- 6 year warranty
- Completely rechargeable – 50lb pail ABC dry chemical on page 18
- Waterproof stainless steel gauge
- Interchangeable 1 1/8" anodized aluminum valve for ABC210, ABC340, ABC480, and ABC1020
- Quick release hose
- Individually packaged



Model #	UL Description	Capacity	Weight	Diameter	Height	Width	PSI	Range	U/L Rating	Coast Guard Approved/Bracket #
			Lbs.	In.	In.	In.		Feet		
ABC Extinguishers										
ABC 2.5-W	SF-ABC110ST	2.5 lb	5	3 1/8	15 1/4	3 3/4	150	8-12	1A-10BC	–
ABC 2.5-V	SF-ABC110ST	2.5 lb	5	3 1/8	15 1/4	3 3/4	150	8-12	1A-10BC	Yes UP2
ABC 5-ALV-W	SF-ABC210ALV	5 lb	10 1/2	4 1/4	15 1/4	6 3/4	195	10-15	2A-10BC	–
ABC 5-ALV-V	SF-ABC210ALV	5 lb	10 1/2	4 1/4	15 1/4	6 3/4	195	10-15	2A-10BC	Yes UB5 or HDVB-1
ABC 5HP-ALV-W	SF-ABC340ALV	5 lb	10 1/2	4 1/4	16 5/8	6 3/4	195	10-15	3A-40BC	–
ABC 5HP-ALV-V	SF-ABC340ALV	5 lb	10 1/2	4 1/4	16 5/8	6 3/4	195	10-15	3A-40BC	Yes UB5 or HDVB-1
ABC 10-W	SF-ABC480AP	10 lb	19 1/4	5 1/8	21 1/4	9 1/2	235	10-15	4A-80BC	Yes UB10 or HDVB-2
ABC 20-W	SF-ABC1020AP	20 lb	35 1/4	7 1/8	24	9 1/2	235	12-18	10A-120BC	Yes HDVB-3

V = Vehicle Bracket W = Wall Bracket HP = High Performance

The new revolutionary Fire Extinguisher **CAPE** can pay for itself in just a few months! Heavy duty quality fabric is fade resistant, UV resistant and flame resistant. Simplifies inspections.

- Patent pending design improvements over traditional covers help keep extinguishers clean in even the dirtiest environments
- Unique flip-top design and closure system simplifies service and replacement of extinguishers
- Deflects moisture and helps keep all kinds of contaminants off of the extinguisher
- Easy installation

Model. #	Description	Size (H x W)	Ext. Capacity
Extinguisher CAPE			
034	Small	26" x 11.5"	5
035	Large	27.5 x 13.5"	10 & 20
036	XXL	36" x 18"	30



(top) The extinguisher CAPE in outdoor location heavily encrusted with lime dust. (bottom) Inside the CAPE's shell, extinguisher is protected from moisture and contaminants.

CO₂-Aluminum Cylinder Carbon Dioxide Fire Extinguishers



CO₂ Aluminum Cylinder Carbon Dioxide

- CO₂ squeeze grip operation
- Strong impact resistant horn
- Aluminum cylinder – complete with wall bracket
- Stainless steel hose band
- 6 year warranty.
- Meets or exceeds ANSI/UL 711, ANSI/UL 154
- Individually packaged



Solid Brass Valve

Model #	UL Description	Capacity	Weight	Diameter	Height	Width	PSI	Range	U/L Rating	Coast Guard Approved/Bracket #
			Lbs.	In.	In.	In.		Feet		
CO2 Extinguishers										
CO2-5	SF-5CO2A	5 lb	13 1/4	5 3/4	17 1/4	10 1/4	–	6-12	5BC	Yes HDVB-2
CO2-10	SF-10CO2A	10 lb	27	6 3/4	19 3/4	10 1/4	–	6-12	10BC	Yes HDVB-3
CO2-15	SF-15CO2A	15 lb	37	6 3/4	26 3/4	10 1/4	–	6-12	10BC	Yes HDVB-3
CO2-20	–	20 lb	48 1/8	8	26 3/4	11 3/4	–	6-12	10BC	–

ABC 30lb. Fire Extinguishers and Wheeled Trolley Cart



ABC 30-W
ABC30



30# ABC Steel Cylinder Dry Chemical

- Manufactured and tested to the following standards: ANSI/UL 711, ANSI/UL 299
- Durable polyester powder paint
- Polyester powder coated steel handles
- Oversized stainless steel pull pin
- Comes complete with wall hook and a 6 year warranty



Wall Hook for 30lb
Dry Chemical

Wheeled Trolley Cart for 30lb. ABC

We also offer a wheeled trolley for transporting 30lb. fire extinguishers. Stainless steel weld tube construction, wheels and a sturdy front foot for balance. (extinguisher not included)



033

Model #	UL Description	Capacity	Weight	Diameter	Height	Width	PSI	Range	U/L Rating	Coast Guard Approved/Bracket #
			Lbs.	In.	In.	In.		Feet		
30# ABC Extinguishers and Trolley Cart										
ABC 30-W	SF-ABC30	30 lb	50 1/3	7 1/8	30 3/4	9 1/2	195	10-15	10A-120BC	Yes HDVB-4
033	30lb. wheeled trolley cart extinguisher not included									

Class K-Kitchen Fire Extinguisher

Features

- 6 Year warranty
- Meets or exceeds requirements of ANSI/UL 711 and ANSI/UL 8
- UL rated 1-A:K
- Polished stainless steel cylinder
- Soft discharge potassium acetate and potassium citrate solution
- Factory charged – ready for use
- Stainless steel handles
- Bar coded label
- Chrome plated brass valve
- Complete with stainless steel wall hook
- 3 liter liquid chemical charge, see page 18

Applications

- Very effective for use on combustible vegetable or animal fats in commercial cooking equipment.
- Suitable for use in restaurants, hospitals, nursing homes, hotels, schools, airports, and other similar facilities.

Description

- The Class K is polished stainless steel, attractive, easy to use and maintain
- The Class K extinguishing agent used provides rapid flame extinguishment and securement of hot fuels such as cooking oils.



Model #	SF-6LK
UL Rating	1-A:K
Capacity	6 liters
Weight (Lbs)	24 1/5
Diameter (In)	7 1/8"
Height (In)	21 1/2"
Width (In)	8 3/4"
Range	8-10 ft
Temp. Range	35° F to 120° F
Discharge Time	55 seconds
PSI	100
U.S.C.G. Approved	-



SF-6LK

Water Fire Extinguisher


Features

- 6 Year warranty
- Meets or exceeds requirements of ANSI/UL 711 and ANSI/UL 626
- Polished stainless steel cylinder
- Waterproof stainless steel guage
- Stored pressure design
- Fully rechargeable
- Easy to operate & maintain
- Stainless steel handles
- Bar coded label
- Chrome plated brass valve with schrader valve
- Complete with stainless steel wall hook

Applications

- Utilizes the cooling, soaking and penetrating effect of a 40 ft. stream of water. The 40 sec. discharge time makes it very effective for inexperienced operators for use on Class A fires.
- Leaves no powder residue

Schrader
Valve




Model #	SFPW-250
UL Rating	2-A
Capacity	2.4 gallons
Weight (Lbs)	7.9
Diameter (In)	7 1/8"
Height (In)	25"
Width (In)	8 3/4"
Range	40 ft
Temp. Range	35°F to 120°F
Discharge Time	40 seconds
PSI	100
U.S.C.G. Approved	-



SFPW-250

Fire Extinguisher Accessories


Standard Wall Brackets

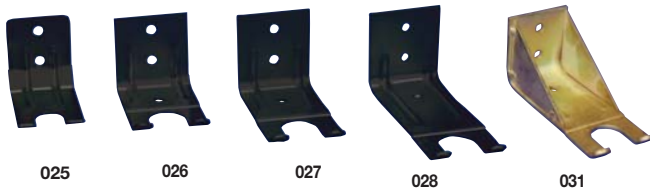

Standard Wall Brackets for use with all 2.5lb, 5lb, 10lb, 20lb, and 30lb ABC fire extinguishers.

Model. #	Accessories Description
025	2.5lb. Standard Wall Bracket
026	5lb. ABC & HP Standard Wall Bracket
027	10lb. Standard Wall Bracket
028	20lb. Standard Wall Bracket
031	30lb. Standard Wall Bracket

Vehicle Brackets

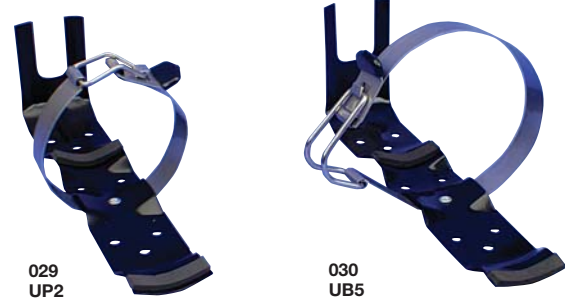

Model. #	Accessories Description	Coast Guard Appd/Ext. #
Standard Brackets - Vehicle Brackets		
029	UP2, 2.5lb. Standard Vehicle Bracket	with ABC-2.5
030	UB5, 5lb. Regular & HP Standard Vehicle Bracket	with ABC-5

Heavy Duty Bracket



We offer a full line of Heavy Duty Vehicle Brackets for use with all ABC fire extinguishers. Proven welded steel construction with a stainless steel pull pin and safety retainer to keep bracket from vibrating open. Polyester powder coat finish. Individually boxed.

Model #	Accessories Description	Coast Guard Appd/Ext. #
020	HDVB1 5lb. Heavy Duty Vehicle Bracket w/Pin & Safety Retainer	with ABC-5-ALV
021	HDVB2 10lb. Heavy Duty Vehicle Bracket w/Pin & Safety Retainer	with ABC-10
022	HDVB3 20lb. Heavy Duty Vehicle Bracket w/Pin & Safety Retainer	with ABC 20
032	HDVB4 30lb. Heavy Duty Vehicle Bracket w/Pin & Safety Retainer	with ABC 30

Medium Duty Double Strap Brackets

We also offer a Medium Duty Double Strap Vehicle Bracket for use with all 5lb and 10lb ABC fire extinguishers. Polyester powder coat finish. Heavy duty buckle closures. Coast Guard approved with 10 lb. ABC extinguisher.



Model. #	Accessories Description	Coast Guard Appd/Ext. #
023	5lb. ABC & HP Double Strap Vehicle Bracket	-
024	UB10, 10lb. ABC Double Strap Vehicle Bracket	with ABC-10

Call our Customer Service Department for more information.

1-800-255-5515

ABC Dry Chemical Charge



SF-90

Wet Chemical Charge



SF-3LK

Model. #	Accessories Description
SF-90	50lb pail-ABC dry chemical
SF-3LK	3 Liter liquid chemical charge, 4-pack

Emergency Lighting Products



LED Exit Signs

MAG-U2-EM

Product Features:

- Ni-cad battery on emergency (EM) units
- Red light with white housing



LED Exit Light

CMAG-EM

Product Features:

- 6-Volt pure lead, maintenance-free battery
- Red light with white housing



Lighting Unit

M-1-EM

Product Features:

- 6-Volt, pure lead, maintenance-free battery
- White housing

Model. #	Description
Emergency Battery EXIT Signs	
MAG-U2-EM	LED Exit Sign-Red Lettering and White Body
CMAG-EM	LED Exit Emergency Light-Red Lettering and White Body
M-1-EM	M-1 Emergency Lighting Unit-White

EMERGENCY Photoluminescent Signs and Decal



Photoluminescent Signs

OSHA 1910.157(c)(1) The employer shall provide portable fire extinguishers and shall mount, locate and identify them so that they are readily accessible to employees without subjecting the employees to possible injury.

- Effectively locate your extinguishers even in the event of a power outage
- Uses international symbols
- Provides the highest level of safety for the occupants of your facility



JAL-US620FS

006 Decal



Model. #	Description
Jalite Photoluminescent EXIT Signs	
JAL-UL419	UL Photoluminescent EXIT Sign <i>green</i> lettering (Size: 7.875" x 17.75")
JAL-UL619	UL Photoluminescent EXIT Sign <i>red</i> lettering (Size: 7.875" x 17.75")
JAL-F007	Optional Aluminum Frame for UL419 and UL619
Jalite Photoluminescent Extinguisher Identification Signs	
JAL-US620FS	Photoluminescent ID Sign <i>double sided</i> "Fire Extinguisher" (Size: 4" x 18")
JAL-US620R	Photoluminescent ID Sign <i>rigid</i> "Fire extinguisher" (Size: 4" x 18")
JAL-6270P15	Photoluminescent ID Sign <i>double sided</i> (Size 6" x 6")
JAL-6422CR	Photoluminescent ID Sign <i>rigid</i> (Size: 6" x 6")
JAL-6422CV	Photoluminescent ID Sign <i>vinyl adhesive</i> (Size: 6" x 6")
JAL-6490DR	Photoluminescent ID Sign <i>rigid</i> "Fire extinguisher" (Size: 6" x 8")
Non-Photoluminescent Extinguisher Identification Decal	
006	Decal "Fire Extinguisher" <i>vertical arrow</i> (Size: 18.5" x 3.75 ")

SAFETY STORAGE Products

Safety Cabinets: Flammable Liquid, Tower, Paint and Ink, Acid and Corrosive, and Poly Acid and Corrosive

Features:

- Cabinets available from 4 gal to 120 gal
- Cabinets are available in 2 door styles: manual 1 and 2 doors and self-closing, self-latching w/hydraulically operated doors w/fusible links
- Meet OSHA and NFPA Code 30 Specifications
- High visibility safety yellow HDPE
- Self-closing models meet UFC 79
- Cabinets are available in 4 colors based on the type of cabinet

Available 4 colors

(based on the type of cabinet you need)



Flammable Storage Cabinet




Paint & Ink Storage Cabinet



Acid & Corrosive Storage Cabinet



Poly Acid & Corrosive Storage Cabinet

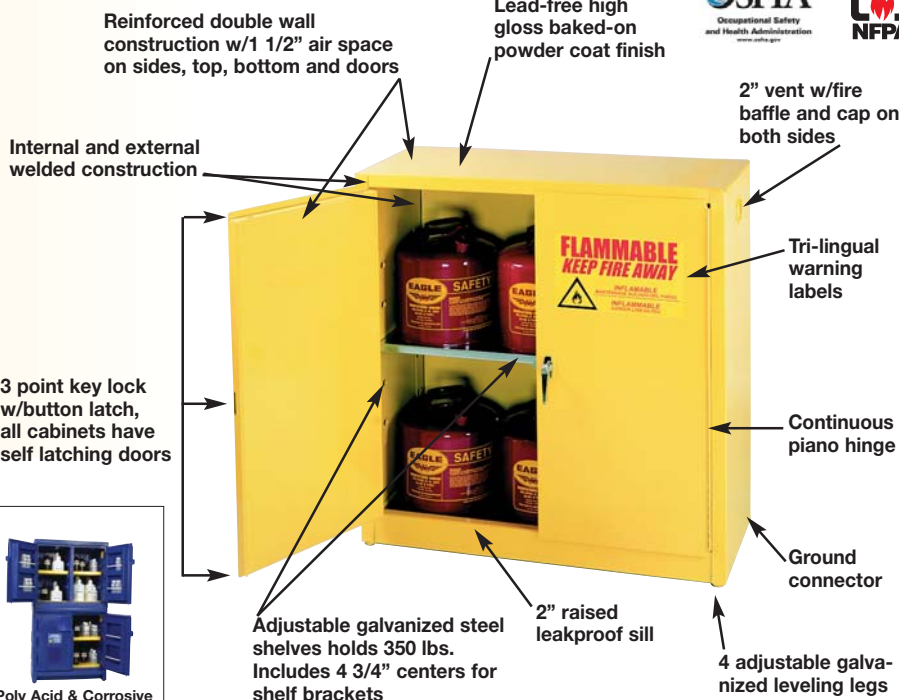

Safety Storage Cabinets

Flammable Liquid Cabinets*

Model. #	Description	Outer Dimensions	Inner Dimensions	Cap.	Load Cap.
Bench Top		W x D x H	W x D x H		
100-1903	self close,	17 1/2" x 18" x 22 1/2"	14 1/2" x 15" x 19 1/2"	4 gal	80 lbs
100-1904	manual close	17 1/2" x 18" x 22 1/2"	14 1/2" x 15" x 19 1/2"	4 gal	80 lbs
Space Saver					
100-1924	self close	23" x 18" x 35"	20" x 15" x 32"	12 gal	135 lbs
100-1925	manual close	23" x 18" x 35"	20" x 15" x 32"	12 gal	135 lbs
100-1905	self close,	23" x 18" x 44"	20" x 15" x 41"	16 gal	150 lbs
100-1906	manual close	23" x 18" x 44"	20" x 15" x 41"	16 gal	150 lbs
Standard 30					
100-3010	self close,	43" x 18" x 44"	40" x 15" x 41"	30 gal	257 lbs
100-1932	manual close	43" x 18" x 44"	40" x 15" x 41"	30 gal	257 lbs
Standard 45					
100-4510	self close,	43" x 18" x 65"	40" x 15" x 62"	45 gal	353 lbs
100-1947	manual close	43" x 18" x 65"	40" x 15" x 62"	45 gal	353 lbs
Standard 60					
100-6010	self close,	31 1/4" x 1/4" x 65"	28 1/4" x 28 1/4" x 62"	60 gal	364 lbs
100-1962	manual close	31 1/4" x 1/4" x 65"	28 1/4" x 28 1/4" x 62"	60 gal	364 lbs
Standard 90					
100-9010	self close,	43" x 34" x 65"	40" x 31" x 62"	90 gal	475 lbs
100-1992	manual close	43" x 34" x 65"	40" x 31" x 62"	90 gal	475 lbs

*For additional shelves, see page 22

Features:

- Cabinets can be placed over floor or wall ventilation
- Provide easy cleaning under cabinets
- Protection in areas where floor moisture is a concern
- Cabinets can be moved with a fork lift or pallet jack
- High visibility safety yellow HDPE
- All steel cabinets meet NFPA Code 30 and OSHA specifications.
- Self-closing models meet Uniform Fire Code and NFPA Code One requirements.



100-9010
Standard 90

Safety Storage Cabinets



Tower Cabinets (Yellow Only)

Model. #	Description	Outer Dimensions	Inner Dimensions	Cap.	Load Cap.	Price
Space Saver		W x D x H	W x D x H			
100-1924LEGS	self close	23" x 18" x 39"	20" x 15" x 32"	12 gal	143 lbs	
100-1925LEGS	manual close	23" x 18" x 39"	20" x 15" x 32"	12 gal	143 lbs	
100-1905LEGS	self close	23" x 18" x 48"	20" x 15" x 41"	16 gal	160 lbs	
100-1906LEGS	manual close	23" x 18" x 48"	20" x 15" x 41"	16 gal	160 lbs	
Tower 30						
100-3010LEGS	self close	43" x 18" x 44"	55" x 28 1/2" x 62"	30 gal	257 lbs	
100-1932LEGS	manual close	43" x 18" x 44"	40" x 15" x 41"	30 gal	257 lbs	
Tower 45						
100-4510LEGS	self close	43" x 18" x 69"	40" x 15" x 62"	45 gal	353 lbs	
100-1932LEGS	manual close	43" x 18" x 69"	40" x 15" x 62"	45 gal	353 lbs	
Tower 60						
100-6010LEGS	self close,	31 1/4" x 31 1/4" x 69"	28 1/4" x 28 1/2" x 62"	60 gal	364 lbs	
100-1962LEGS	manual close	31 1/4" x 31 1/4" x 69"	28 1/4" x 28 1/2" x 62"	60 gal	364 lbs	
Tower 90						
100-9010LEGS	self close,	43" x 34" x 69"	40" x 31" x 62"	90 gal	475 lbs	
100-1992LEGS	manual close	43" x 34" x 69"	40" x 31" x 62"	90 gal	475 lbs	

*For additional shelves, see page 22

100-1924LEGS
Space Saver



100-CRA-4510
Standard 45



100-2610
Bench Top

Features

- Special corrosive resistant powder coat finish on all internal and external surfaces, including shelves
- Includes poly shelf and bottom trays to help contain small spills and provide extra corrosive protection
- Steel cabinets are not recommended for the storage of aggressive acids such as nitric, sulfuric and hydrochloric
- Bench top and standard 30 has 1 self, Standard 45, 2 selves, and the space saver has 3 shelves
- OSHA/NFPA Code 30 and FM tested and approved

Acid & Corrosive Cabinets*

Model. #	Description	Outer Dimensions	Inner Dimensions	Cap.	Load Cap.
Bench Top		W x D x H	W x D x H		
100-CRA-1903	self close	17 1/2" x 18" x 22 1/2"	14 1/2" x 15" x 19 1/2"	4 gal	80 lbs
100-CRA-1904	manual close	17 1/2" x 18" x 22 1/2"	14 1/2" x 15" x 19 1/2"	4 gal	80 lbs
Space Saver					
100-CRA-2310	self close	23" x 18" x 65"	20" x 15" x 62"	24 gal	270 lbs
100-CRA-1923	manual close	23" x 18" x 65"	20" x 15" x 62"	24 gal	270 lbs
Standard 30					
100-CRA-3210	self close	43" x 18" x 44"	55" x 28 1/2" x 62"	30 gal	257 lbs
100-CRA-32	manual close	43" x 18" x 44"	40" x 15" x 41"	30 gal	257 lbs
Standard 45					
100-CRA-4510	self close	43" x 18" x 65"	40" x 15" x 62"	45 gal	353 lbs
100-CRA-47	manual close	43" x 18" x 65"	40" x 15" x 62"	45 gal	353 lbs

*For additional shelves, see page 22

SAFETY STORAGE Products

Features

- Capacity is based upon the number of 1-gallon paint cans
- Available in red or safety yellow (add a "Y" before the model number)
- Aerosol cabinets include wall mount brackets and holds up to 252-12 oz. aerosol cans
- Standard 40 has 3 Shelves, standard 60 has 5 shelves
- OSHA/NFPA Code 30 and FM tested and approved

Paint & Ink Cabinets

Model. #	Description	Outer Dimensions	Inner Dimensions	Cap.	Load Cap.
Standard 40					
100-PI-3010	self close,	43" x 18" x 44"	40" x 15" x 41"	40 gal	350 lbs
100-PI-32	manual close	43" x 18" x 44"	40" x 15" x 41"	40 gal	350 lbs
Standard 60					
100-PI-4510	self close	43" x 18" x 65"	40" x 15" x 62"	60 gal	389 lbs
100-PI-47	manual close	43" x 18" x 65"	40" x 15" x 62"	60 gal	389 lbs

Additional shelves, below



100-PI-3010
Standard 40

Features:

- Sealed internal and top spill sumps, adjustable shelves, storage in door for small bottles, and specific warning labels
- Includes 2-2" poly vents w/caps, poly leveling legs
- Under counter has 2 shelves, Standard has 4 shelves.
- Lockable doors for secure storage of dangerous acids
- OSHA/NFPA Code 30 and FM tested and approved



100-CRA-P22
Under Counter

Poly Acid/Corrosive Cabinets

Model. #	Description	Outer Dimensions	Inner Dimensions	Cap.	Load Cap.
Under Counter		W x D x H	W x D x H		
100-CRA-P22	manual close, blue (for white, add "W")	35" x 22" x 36"	32" x 19" x 33"	22 gal	95 lbs
Standard					
100-CRA-P44	self close	35" x 22" x 36"	32" x 19" x 33"	44 gal	130 lbs


Additional shelves, below



100-CRA-P44
Standard

Features:

- Drum Cabinet** includes drum support guides in bottom and 1 shelf
- Haz-Mat** includes roller conveyor in bottom, 1 shelf and Haz-Mat label
- OSHA/NFPA Code 30 and FM tested and approved

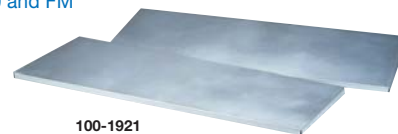

100-1921
Additional
Metal Shelves



100-1955

100-1926

Drum/Haz-Mat Cabinets

Model. #	Description	Outer Dimensions	Inner Dimensions	Drum Cap.	Load Cap.
One Drum Vertical		W x D x H	W x D x H		
100-2610	1 drum self close	31 1/4" x 31 1/4" x 65"	28 1/4" x 28 1/4" x 62"	55 gal	350 lbs
100-1926	1 drum manual close	31 1/4" x 31 1/4" x 65"	28 1/4" x 28 1/4" x 62"	55 gal	350 lbs
100-HAZ2610	1 drum self close	31 1/4" x 31 1/4" x 65"	28 1/4" x 28 1/4" x 62"	55 gal	350 lbs
100-HAZ1926	1 drum manual close	31 1/4" x 31 1/4" x 65"	28 1/4" x 28 1/4" x 62"	55 gal	350 lbs
Two Drum Vertical					
100-5510	2 drum self close	58" x 31 1/2" x 65"	55" x 28 1/2" x 62"	110 gal	575 lbs
100-1955	2 drum manual close	58" x 31 1/2" x 65"	55" x 28 1/2" x 62"	110 gal	575 lbs
100-HAZ5510	2 drum self close	58" x 31 1/2" x 65"	55" x 28 1/2" x 62"	110 gal	575 lbs
100-HAZ1955	2 drum manual close	58" x 31 1/2" x 65"	55" x 28 1/2" x 62"	110 gal	575 lbs

Additional shelves, see above

Portable Fire Extinguisher Stand



(Extinguisher not included)

the Centurion

fits ALL 10 lb and 20 lb ABC Fire Extinguishers

Plastic Cabinet (PC-Sold separately on page 9) cabinet with body and frame injection molded in red virgin high-impact crystal polystyrene of .110 wall thickness with ultra-violet inhibitors, virgin acrylic Plaskolite® panel of .080 thickness. Chromium plated brass safety lock and key with weather-proof protective lock cover and polypropylene plastic injected molded hammer.

- Red bodies shipped with red hammer and lock covers

the Centurion fits ALL 10 lb and 20 lb ABC fire extinguishers, fully assembled portable fire extinguisher stand (extinguisher not included).

- Lightweight molded polyethylene for maximum weatherability
- Equipped with required safety decals
- Environmentally safe sand filled base (10 lb has 20 lbs of sand, 20 lb has 25 lb sand base)
- Top and bottom 16 ga steel Galva Coat brackets are powder coated
- Faultless casters for easy mobility

Options:

- Mini Theft Stopper (item ST1-6255)
- Large Vertical Decal and Arrow Decal (item 004 and 006)



006




004



ST1-6255

NOTE: Fire fighting equipment must be freely accessible at all times, placed in a conspicuous location, and well maintained.

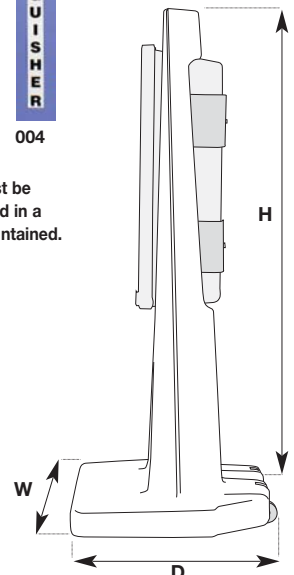

Model #	Ext. Capacity	W	Overall Dimensions		Shipping Wt Pallet of 4*	Shipping Wt Single Unit
			H	D		
CENTURION-10	10#	22"	45 3/4"	17 1/2" w/casters	208 lbs*	78 lbs*
CENTURION-20	20#	27 1/2"	56"	21" w/casters	280 lbs*	96 lbs*
Options and Accessories						
ST1-6255	Mini Theft Stopper				-	-
004	Large Decal "Fire Extinguisher" Black 7/8" x 17"				-	-
006	Decal "Fire Extinguisher" vertical arrow, 18 1/2" x 3 3/4"				-	-
ANCHOR-10	10# Base Anchoring Strap Brackets (per 2) stainless steel				-	-
ANCHOR-20	20# Base Anchoring Strap Brackets (per 2) stainless steel				-	-

Strike First Corporation of America



The Centurion



**EL-Elite
Series**



**TN-Titan
Series**



**SN-Sonoma
Series**



**BC-Bubble
Canopy**



Classic Series



HDOC



VC-Valve



PC-Plastic

Download specifications and catalogs at
www.strikefirstusa.com or Contact us at **1-800-255-5515**

(Extinguishers not included)



Corporate Office, 1330 Progress Drive, Front Royal, VA 22630



Western Distribution Center, 4058 S. McCarran Blvd., Bldg. A, Reno, NV 89502

DISTRIBUTED BY:

Strike First Corporation of America

Phone: 1-800-255-5515

Fax: 1-800-822-5001

www.strikefirstusa.com

For country of manufacture
of all products please call our
Customer Service Department.