

Strike First Corporation of America

EL-ELITE ARCHITECTURAL Series Fire Extinguisher Cabinets (Non Rated)

Detail & Submittal Sheet

Construction Specifications:

ELITE (EL) non-fire rated cabinet fronts are 16 gauge cold rolled steel with 22 gauge cold rolled steel tubs. Fronts are baked white enamel over rust inhibiting phosphate treated steel. All semi-recessed fronts have radius corners except the Apex 5lb cabinets have a 1 1/2" square trim. Stainless steel fronts come standard with white tubs. All cabinets come standard with chrome handles and clear acrylic glazing.



To comply with ADA Guidelines, Extinguishers and Cabinets offer handles, brackets and return trims according to instructions provided by installer. For ADA compliance follow the specification ordering process dimensions in our catalog. Proper installation in accordance with the ADA Guidelines is the sole responsibility of the installer. For more information please visit the Accessibility Guidelines for Buildings and Facilities website or call them at 1-800-872-2253.

Project: _____

Specification Reference: _____

Model Number: _____ Quantity: _____

Architect: _____

Contractor: _____

Distributor: _____

Approved By: _____

Date: _____

SPECIFICATION PROCESS: Follow the steps below to specify your cabinet.

STEP 1: EXTINGUISHER SIZE:
5 - 5 lb. 1 - 10 lb. 2 - 20 lb.

STEP 2: CABINET STYLE:
0 - Surface Mounted (S)
1 - Semi-Recessed (SR)
2 - Fully-Recessed (FR)

STEP 3: DOOR STYLE:
6 - Full Glass (FG)
7 - Full Metal (FM)
8 - Vertical Duo (VD)
9 - Center Duo (CD)
10 - Horizontal Duo (HD)

STEP 4: SERIES:
EL- Elite

STEP 5: CABINET TYPE:
Non-Fire Rated

STEP 6: FINISH OPTIONS:

- ☐ SSF- Stainless Steel Front
- ☐ FSS- Full Stainless Steel
- ☐ RD- Red Coated

STEP 7: HANDLE OPTIONS:


- ☐ 008 - Safety Break Lock
- ☐ 009 - Center Duo Safety Lock
- ☐ 010 - Alum. Die Cast Red "Fire" Handle
- ☐ 012 - ADA Handle

STEP 8: GLAZING:


- ☐ G10 - Double Strength Glass
- ☐ G11 - Clear Acrylic (Standard)
- ☐ G12 - Clear Tempered Glass
- ☐ G13 - Single Strength Glass

STEP 9: LETTERING:


- ☐ 002 - Decal "Pull Firmly" R only
- ☐ 003 - Decal "Fire Ext." Sm Vert R/B
- ☐ 004 - Decal "Fire Ext." Lrg Vert R/B
- ☐ 005 - Decal "Fire Ext." Sm Horiz R/B
- ☐ 006 - Decal "Fire Ext." Lrg Horiz R/B

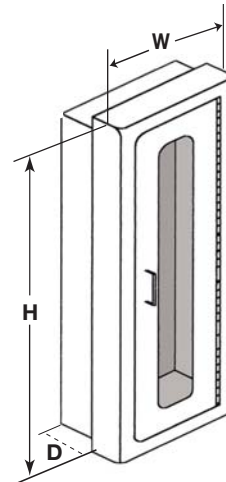

Standard Door Styles




Optional Door Styles



	Mod. #	Interior Tub Size			Overall Outside Trim		Rough Opening			Trim Style	Accom. Ext Size
		W	H	D	W	H	W	H	D		Lbs.
	Surface Mounted										
	506-EL	8"	16 3/4"	5"	8 1/2"	17 1/2"	–	–	–	–	5
	507-EL	8"	16 3/4"	5"	8 1/2"	17 1/2"	–	–	–	–	5
	508-EL	8"	16 3/4"	5"	8 1/2"	17 1/2"	–	–	–	–	5
	106-EL	9 1/2"	23 3/4"	6"	10"	24 1/2"	–	–	–	–	10
	107-EL	9 1/2"	23 3/4"	6"	10"	24 1/2"	–	–	–	–	10
	108-EL	9 1/2"	23 3/4"	6"	10"	24 1/2"	–	–	–	–	10
	206-EL	12"	27"	8"	12 1/2"	27 1/2"	–	–	–	–	20
	207-EL	12"	27"	8"	12 1/2"	27 1/2"	–	–	–	–	20
	208-EL	12"	27"	8"	12 1/2"	27 1/2"	–	–	–	–	20
	Semi-Recessed										
	516-EL	8"	17"	5"	10 3/4"	19 3/4"	8 1/4"	17 1/4"	3 1/2"	1 1/2"	5
	517-EL	8"	17"	5"	10 3/4"	19 3/4"	8 1/4"	17 1/4"	3 1/2"	1 1/2"	5
	518-EL	8"	17"	5"	10 3/4"	19 3/4"	8 1/4"	17 1/4"	3 1/2"	1 1/2"	5
	116-EL	9 1/2"	24"	6"	13 1/2"	28 1/2"	9 3/4"	24 1/4"	3 1/2"	2 1/2"	10
	117-EL	9 1/2"	24"	6"	13 1/2"	28 1/2"	9 3/4"	24 1/4"	3 1/2"	2 1/2"	10
	118-EL	9 1/2"	24"	6"	13 1/2"	28 1/2"	9 3/4"	24 1/4"	3 1/2"	2 1/2"	10
	216-EL	12"	27"	8"	16"	31"	12 1/4"	27 1/4"	5"	3"	20
	217-EL	12"	27"	8"	16"	31"	12 1/4"	27 1/4"	5"	3"	20
	218-EL	12"	27"	8"	16"	31"	12 1/4"	27 1/4"	5"	3"	20
	Fully-Recessed										
	526-EL	8"	16 3/4"	5"	12"	21"	8 1/4"	17 1/4"	4 3/4"	1/4"	5
	527-EL	8"	16 3/4"	5"	12"	21"	8 1/4"	17 1/4"	4 3/4"	1/4"	5
	528-EL	8"	16 3/4"	5"	12"	21"	8 1/4"	17 1/4"	4 3/4"	1/4"	5
	126-EL	9 1/2"	24"	6"	14"	28 1/2"	9 3/4"	24 1/4"	5 3/4"	1/4"	10
	127-EL	9 1/2"	24"	6"	14"	28 1/2"	9 3/4"	24 1/4"	5 3/4"	1/4"	10
	128-EL	9 1/2"	24"	6"	14"	28 1/2"	9 3/4"	24 1/4"	5 3/4"	1/4"	10
	226-EL	12"	27"	8"	16"	31"	12 1/4"	27 1/4"	7 3/4"	1/4"	20
	227-EL	12"	27"	8"	16"	31"	12 1/4"	27 1/4"	7 3/4"	1/4"	20
	228-EL	12"	27"	8"	16"	31"	12 1/4"	27 1/4"	7 3/4"	1/4"	20

Installation Options

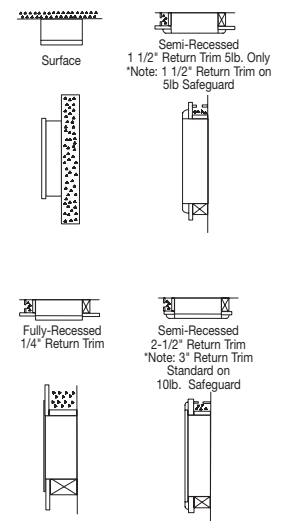

SFCA 2010