

Strike First Corporation of America

TN-TITAN Series Aluminum Extinguisher Cabinets

Detail & Submittal Sheet

Titan Series (TN) Aluminum cabinets are constructed of non-extruded .063 thick aluminum with grey finish powder coat. All non-rated cabinets come standard with aluminum tubs, chrome steel handles and clear acrylic glazing. Fire-rated cabinets come standard with steel tubs, chrome steel handles and clear acrylic glazing.

SPECIFICATION PROCESS: Follow the steps below to specify your cabinet.

STEP 1: EXTINGUISHER SIZE:
1 - 10 lb.

STEP 2: CABINET STYLE:
0 - Surface Mounted (S)
1 - Semi-Recessed (SR)
2 - Fully-Recessed (FR)

STEP 3: DOOR STYLE:
6 - Full Glass (FG)
7 - Full Metal (FM)
8 - Vertical Duo (VD)

STEP 4: SERIES:
TN - Aluminum Cabinet


STEP 5: CABINET TYPE:
SG - SAFEGUARD - Fire Rated
with steel tub

STEP 6: FINISH OPTIONS:
☐ AL - Aluminum Front (w/steel tub)
☐ FAL - Full Aluminum (front and tub)

STEP 7: HANDLE OPTIONS:
☐ 008 - Safety Break Lock
☐ 010 - Alum. Die Cast Red "Fire" Handle
☐ 012 - ADA Handle

STEP 8: GLAZING:
☐ G10 - Double Strength Glass
☐ G11 - Clear Acrylic (standard)
☐ G12 - Clear Tempered Glass
☐ G13 - Single Strength Glass

STEP 9: LETTERING:
☐ 002 - Decal "Pull Firmly" R only
☐ 004 - Decal "Fire Ext." Lrg Vert R/B
☐ 005 - Decal "Fire Ext." Sm Horiz R/B
☐ 006 - Decal "Fire Ext." Lrg Horiz R/B

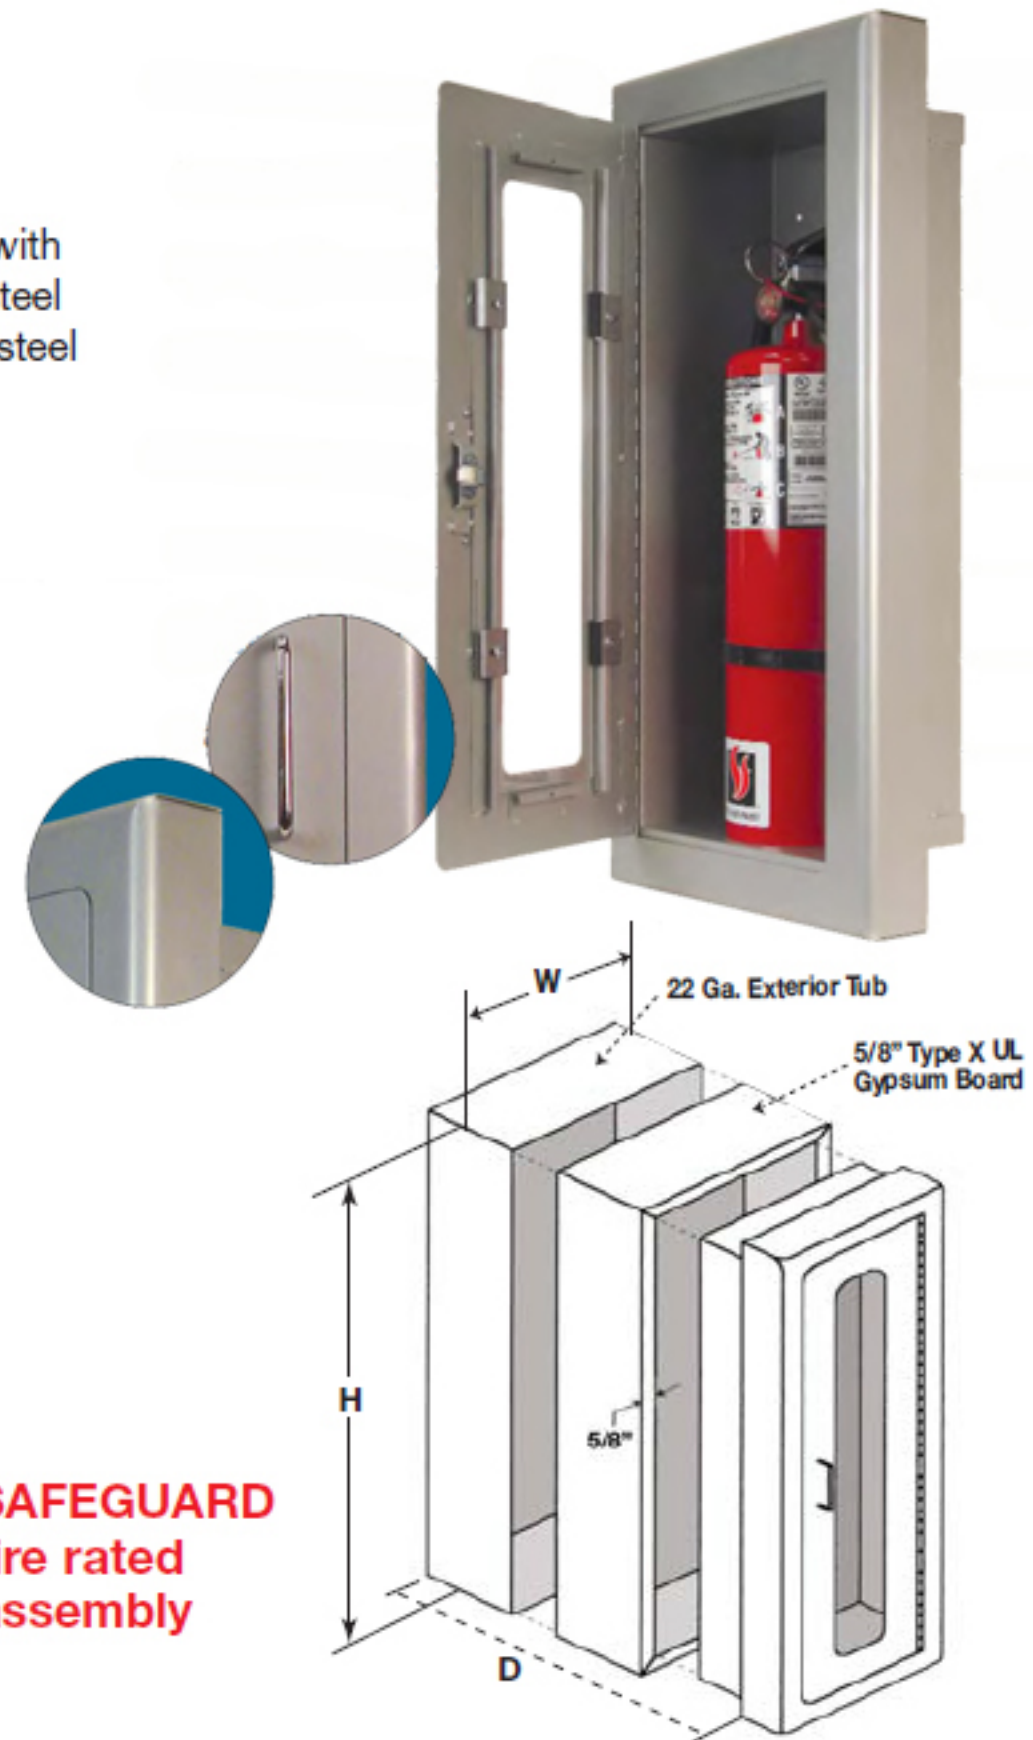


SAFEGUARD
fire rated
assembly

UL Classified 5/8" Type X gypsum board inserted in the cavity between the two layers. Warnock Hersey has approved the Safeguard Cabinets to be mounted in any face of fire rated steel or wood stud for up to 2 hour rated walls without affecting its fire rating. The above meets the requirement test ASTM-E119-98 with test report WHI-495-1534. MOUNTING INSTRUCTIONS are supplied with each Safeguard cabinet.


SAFEGUARD

Typical Semi-Recessed Fire Rated Installation

ONE HOUR FIRE WALL SYSTEM

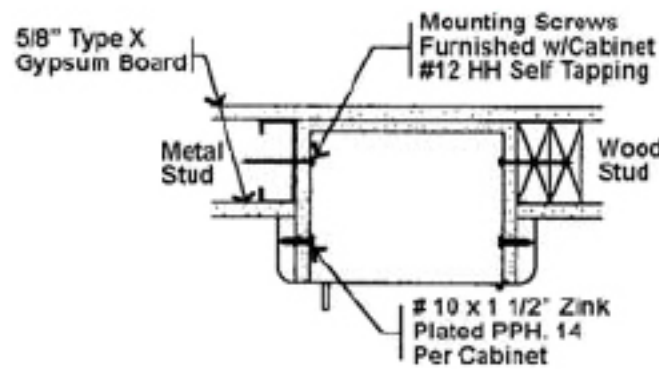

TWO HOUR FIRE WALL SYSTEM

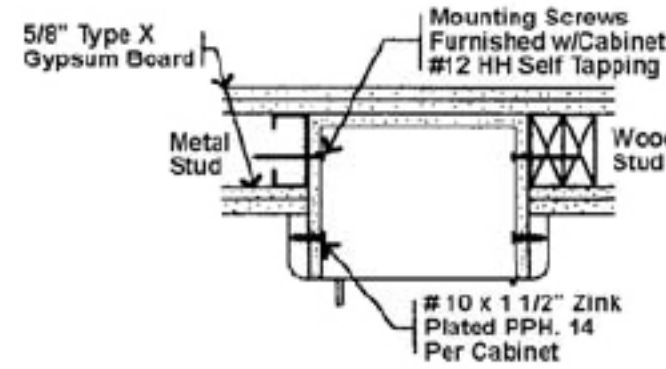

	Mod. #	Interior Tub Size			Overall Outside Trim		FAL (aluminum front and tub) Rough Open			FAL (aluminum front and tub) Trim Style	 SAFEGUARD - AL (aluminum front and steel tub) Rough Opening 	SAFEGUARD AL (aluminum front and steel tub) Trim Style	Accom. Ext Size		
		W	H	D	W	H	W	H	D		W	H	D		Lbs.
	Surface Mounted														
	106-TN	9 1/2"	23 3/4"	6"	10"	24 1/2"	-	-	-	-	-	-	-	-	10
	107-TN	9 1/2"	23 3/4"	6"	10"	24 1/2"	-	-	-	-	-	-	-	-	10
	108-TN	9 1/2"	23 3/4"	6"	10"	24 1/2"	-	-	-	-	-	-	-	-	10
	Semi-Recessed														
	116-TN	9 1/2"	24"	6"	13 1/2"	28 1/2"	9 3/4"	24 1/4"	3 1/2"	2 1/2"	11 1/4"	25 3/4"	3 3/4"	3"	10
	117-TN	9 1/2"	24"	6"	13 1/2"	28 1/2"	9 3/4"	24 1/4"	3 1/2"	2 1/2"	11 1/4"	25 3/4"	3 3/4"	3"	10
	118-TN	9 1/2"	24"	6"	13 1/2"	28 1/2"	9 3/4"	24 1/4"	3 1/2"	2 1/2"	11 1/4"	25 3/4"	3 3/4"	3"	10
	Fully-Recessed														
	126-TN	9 1/2"	24"	6"	14"	28 1/2"	9 3/4"	24 1/4"	5 3/4"	1/4"	11 1/4"	25 3/4"	6 1/2"	1/4"	10
	127-TN	9 1/2"	24"	6"	14"	28 1/2"	9 3/4"	24 1/4"	5 3/4"	1/4"	11 1/4"	25 3/4"	6 1/2"	1/4"	10
	128-TN	9 1/2"	24"	6"	14"	28 1/2"	9 3/4"	24 1/4"	5 3/4"	1/4"	11 1/4"	25 3/4"	6 1/2"	1/4"	10