


LID SUPPORTS & STAYS



Medium & Heavy Duty Soft-Close Movement

- Designed for upward-opening flap doors
- Lift-assisted mechanism for extra light-opening
- Door stays in any desired position by opening the door to position and then letting it go
- Damper equipped for soft & silent closing at the end
- Slim design and installed location maximizes space inside of cabinet
- Simple installation by aligning body to edge of cabinet
- Single or pair use allows wide range of door size/weight, refer to table below
- Tested to 40,000 cycles
- Mechanism has light gray colored housing
- Screws included



Item#	Type	Description	Color	Box Qty
SLSLSELAN-MR	M-Type	Medium Duty, Installed on Right	Light Gray	20
SLSLSELAN-ML	M-Type	Medium Duty, Installed on Left	Light Gray	20
SLSLSELAN-HR	H-Type	Heavy Duty, Installed on Right	Light Gray	20
SLSLSELAN-HL	H-Type	Heavy Duty, Installed on Left	Light Gray	20

■ 3 functions on 1 stay


1. Lift-assist



2. Free stop



3. Soft-close

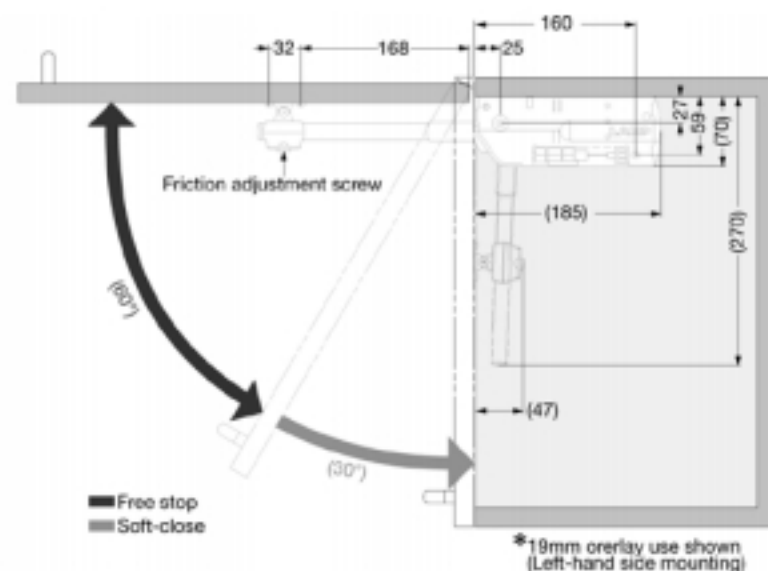

Door Weight Range Table (lbs.)

Door Height (inch)	Single use				Pair use			
	M-type		H-type		M-type		H-type	
	Min	Max	Min	Max	Min	Max	Min	Max
12"	8.0	10.8	10.8	14.5	16.0	21.7	21.7	29.0
13"	7.4	10.0	10.0	13.4	14.8	20.0	20.0	26.8
14"	6.9	9.3	9.3	12.4	13.7	18.6	18.6	24.9
15"	6.4	8.7	8.7	11.6	12.8	17.3	17.3	23.2
16"	6.0	8.1	8.1	10.9	12.0	16.3	16.3	21.8
17"	5.6	7.6	7.6	10.2	11.3	15.3	15.3	20.5
18"	5.3	7.2	7.2	9.7	10.7	14.4	14.4	19.3
19"	5.1	6.8	6.8	9.2	10.1	13.7	13.7	18.3
20"	4.8	6.5	6.5	8.7	9.6	13.0	13.0	17.4
21"	4.6	6.2	6.2	8.3	9.1	12.4	12.4	16.6
22"	4.4	5.9	5.9	7.9	8.7	11.8	11.8	15.8
23"	4.2	5.7	5.7	7.6	8.3	11.3	11.3	15.1
24"	4.0	5.4	5.4	7.3	8.0	10.8	10.8	14.5
25"	3.8	5.2	5.2	7.0	7.7	10.4	10.4	13.9
26"	3.7	5.0	5.0	6.7	7.4	10.0	10.0	13.4
27"	3.6	4.8	4.8	6.4	7.1	9.6	9.6	12.9
28"	3.4	4.6	4.6	6.2	6.9	9.3	9.3	12.4

*Single or pair use depending on door size and weight.