


Product Catalog






Extended Range Card Reader - ACTR-CR1


The ACTR-CR1 is a surface mounted, long range proximity card reader which will detect multiple PT-TC1 and AT-TC2 proximity cards from distances in excess of 40 inches using its internal antenna and over 9 feet using an external antenna loop. This long range reading feature makes the ACTR-1000 an outstanding reader for parking gate activation or hands free reader operation.

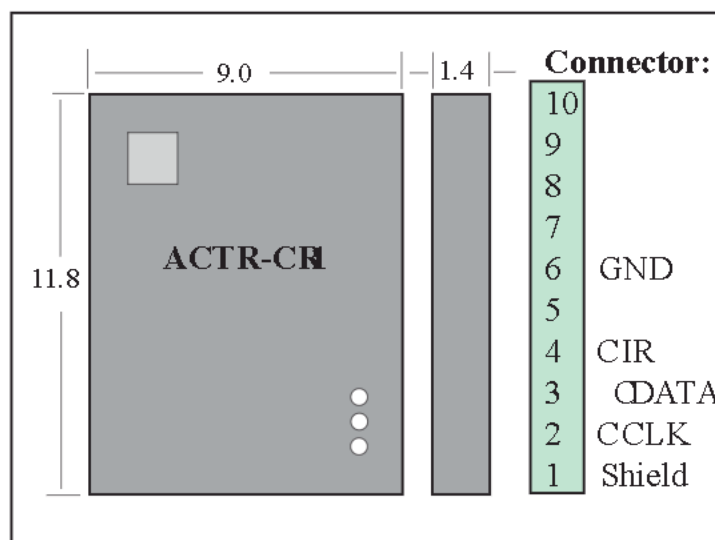

A multi-tag reading capability makes the ACTR-CR1 an ideal device for tracking and recording portable assets when supported by WaPac Tracker software. The reader may be configured to detect the direction that the tag is passing (either in or out of an area) using a double loop antenna and its detection sensing option.

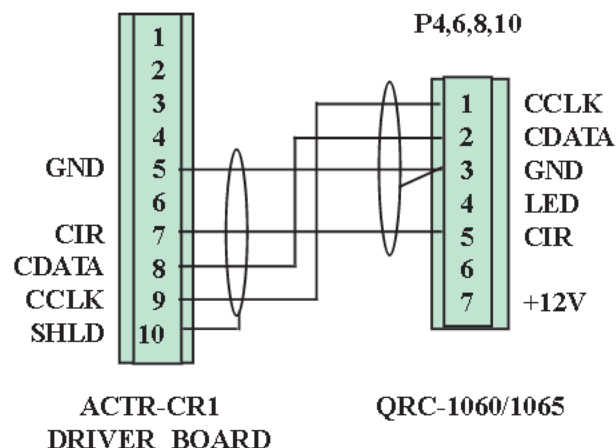

The ACTR-CR1 is supported by Building Watch, PcPac, WaPac, WaPac Tracker and all stand alone access control and asset tracking systems.

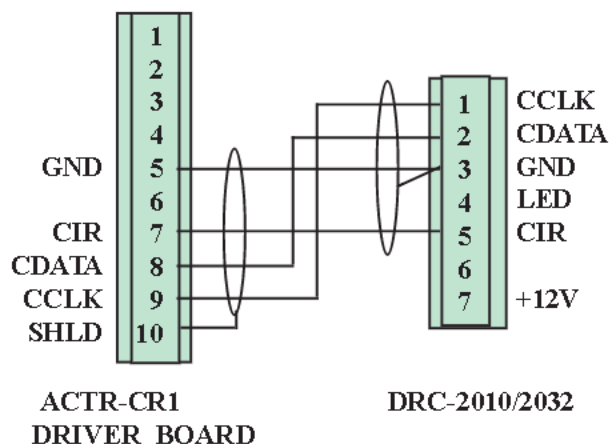



Narrow Insertion Card Reader - IR1051FLN3

IR1051FLN3

Insertion Reader
 Used with ATMA
 system.

Narrow, Vertical
 Mullion Mount
 Flush Mounted
 Mag Stripe

Environmental

Lighted:

Red blinking:

Reader active

Red on:

Invalid card

Green on:

Door unlocked

Electrical:

5VDC, 30mA

Mechanical:

Weight, 0.5 lbs.

Color, Silver

Interface:



Cable distance 750ft.

6 wire, 22 AWG,
 shielded cable.

Ref: Belden 8777

IR1051FLN3

ATM Access

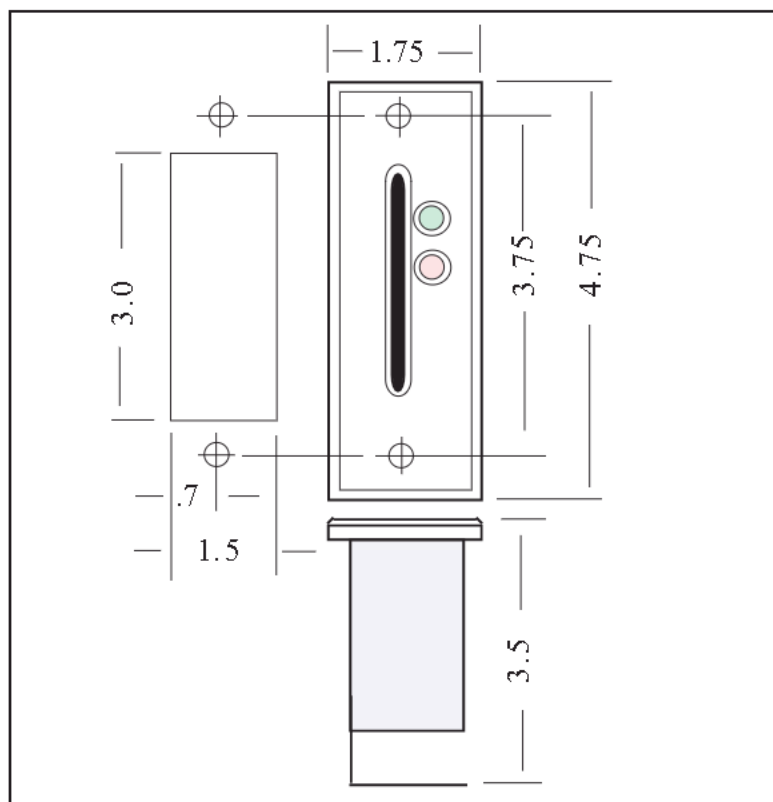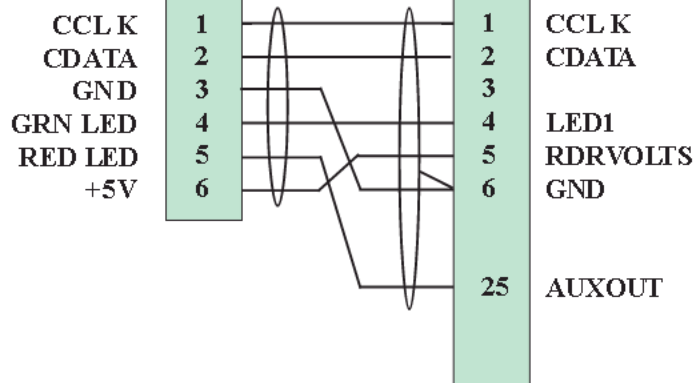

Insertion Card Reader - IR1051FL3

IR1051FL3

Insertion Reader
 Mag Stripe
 Environmental
 Flush Mounted
 Lighted:
 Red blinking:
 Reader active
 Red on:
 Invalid card
 Green on:
 Door unlocked

Electrical:


5VDC, 30mA

Mechanical:

Weight, 0.5 lbs.
 Color, Silver


Interface:

Cable distance 750ft.
 6 wire, 22 AWG,
 shielded cable.
 Ref: Belden 8777

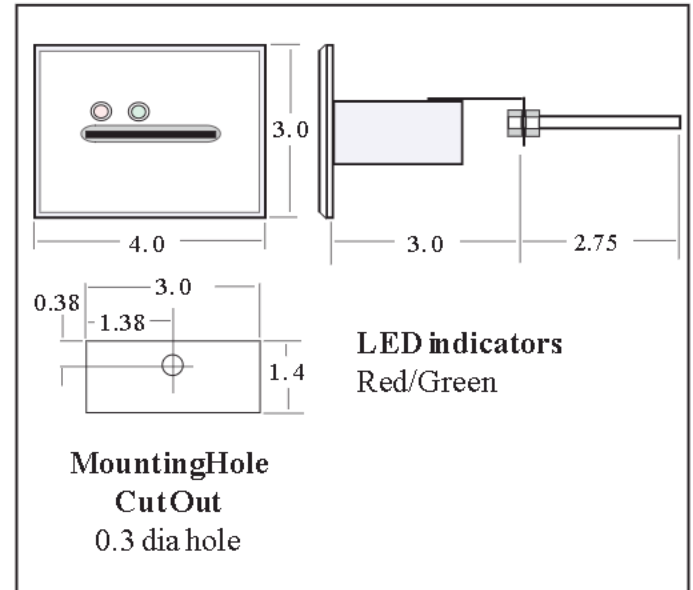

IR1051FL3

ATM Access

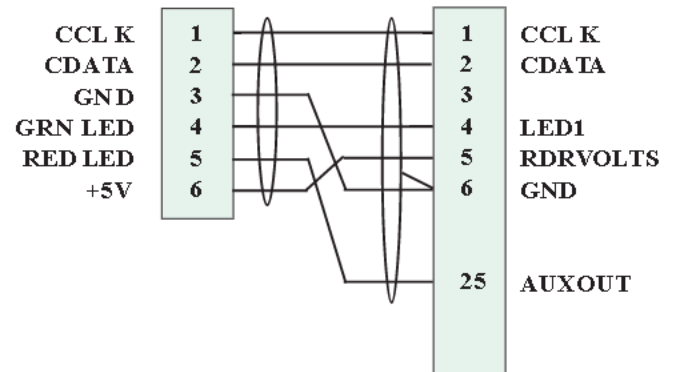

LOOP COUPLER - DCTR-270

DTCR-280

Size: 260 x 220 x 25 mm

Weight: 0.74 kg

Mounting:

4 #8 wood screws

Construction:

Molded ABS case

Color:

Base: gray. Cover: off

white. Power 12 V @

130ma to 350ma

Data Out Wiegand or mag
stripe

Environment:

Indoor/outdoor

Temperature:

-40 deg C to +70 deg C.

Relative Humidity:

0% to 95%

Sealing:

IP44 weatherproof

Cable:

3, 22AWG, shielded
twisted pairs, (Belden
8777 or equivalent).


Cable Termination:

Screw Terminal Block.

A loop antenna will increase the range of mid range readers to between 1.0 and 1.5 meters depending on installation circumstances. The DCTR-270

Loop Coupler is used to interface an external loop antenna to the Synergistics reader controller via the DCTR- 5311 Reader Interface.

The Loop Coupler may be located up to 300 meters from the DCTR- 5311 reader interface, and up to 10m from the loop.

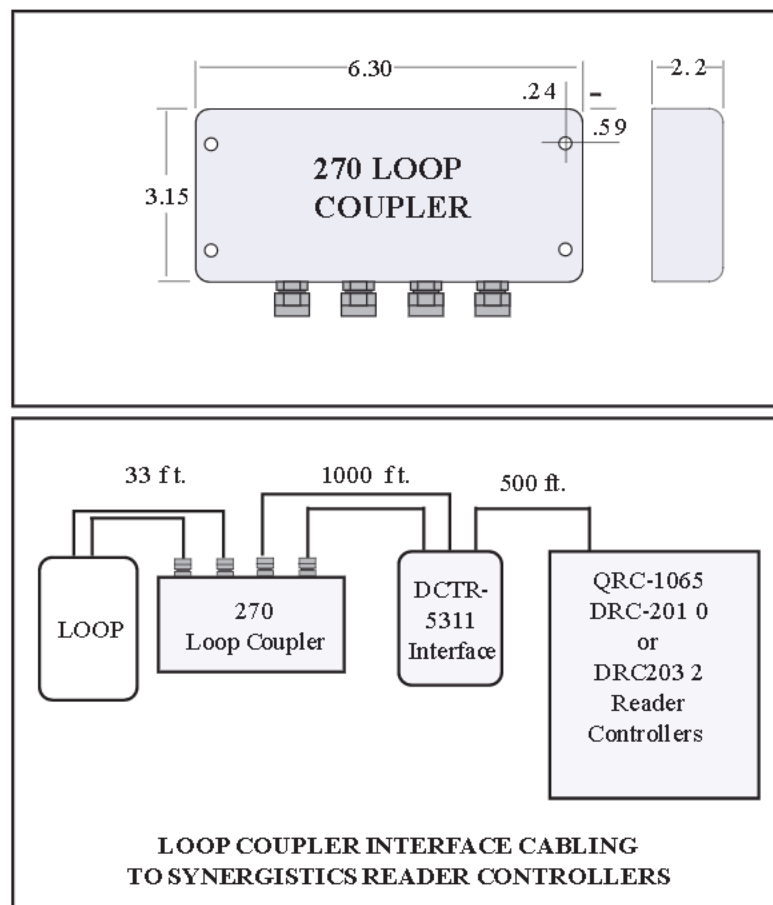



Mid Range Read Head - DCTR-280

DCTR-280

Size: 260 x 220 x 25 mm

Weight: 0.74 kgm. (1.7 lbs.)

Mounting:

4 #8 wood screws

Construction:

Molded ABS case

Color:

Base: gray. Cover: off white.

Environment:

Indoor/outdoor

Temperature:

-40 deg C to +70 deg C.

Relative Humidity:

0% to 95%

Sealing:


IP44 weatherproof

Cable:

Transmit and Receive:
2 shielded twisted pairs,
(Belden 8723 or eq. for 22
AWG).

Cable Termination:

Screw Terminal Block.

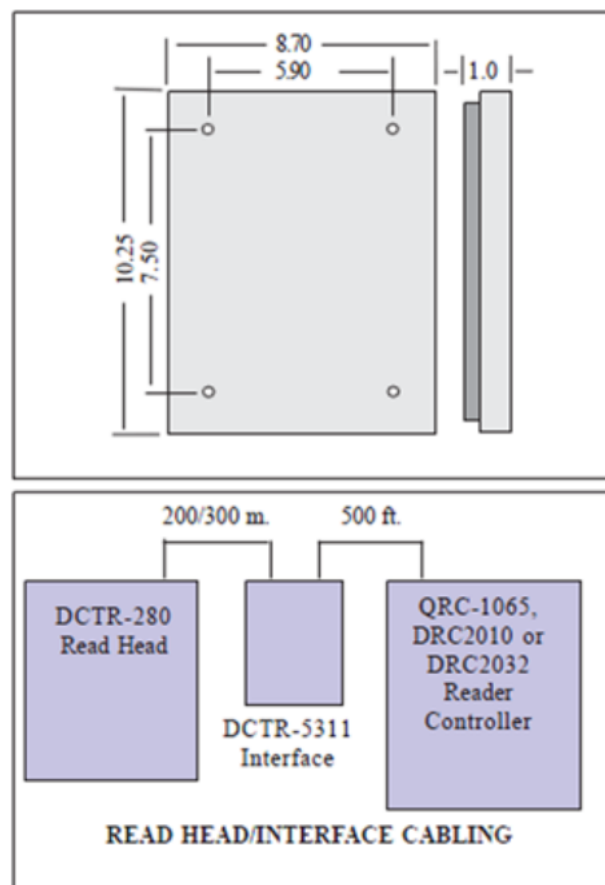

The DCTR-280 is a surface mounted, environmental, medium range proximity card reader head which operates with the DCTR-5311 reader interface.

This combination allows the user to mount the read head either indoors or outdoors separate from the DCTR-5311 interface.

The wiring distance between the DCTR-5311 and the read head varies with the wire size. 22 AWG = 200m 20 AWG = 300m

Up to a 24 inch read range can be expected for the DCTR-280 read head depending on the environment and location of the read head.

The DCTR-280 is supported by all Synergistics stand alone and computer based access control systems including WaPac, WaPac Tracker and Building Watch access control and asset tracking systems operating on DOS and Windows platforms.

Mid Range Proximity Reader - DCTR-5280

DTCR-280

Size: 260 x 220 x 25 mm

Weight: 0.74 kg

Mounting:

4 #8 wood screws

Construction:

Molded ABS case

Color:

Base: gray. Cover: off

white. Power 12 V @

130ma to 350ma

Data Out Wiegand or mag
 stripe

Environment:

Indoor/outdoor

Temperature:

-40 deg C to +70 deg C.

Relative Humidity:

0% to 95%

Sealing:


IP44 weatherproof

Cable:

3, 22AWG, shielded
 twisted pairs, (Belden
 8777 or equivalent).

Cable Termination:

Screw Terminal Block.

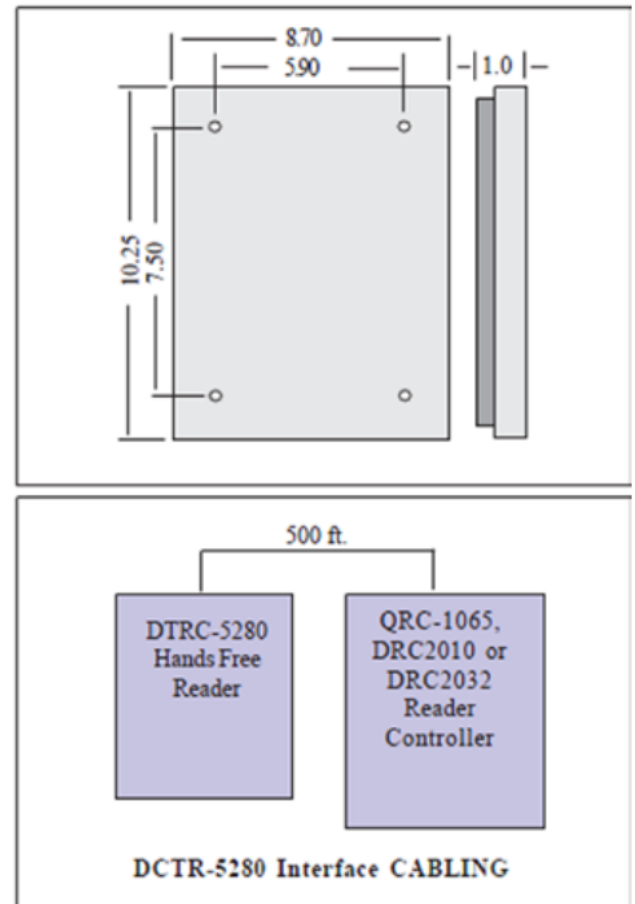

The DCTR-5280 is a surface mounted, indoor, medium range proximity card reader. This reader interfaces with QRC-1065, DRC2010 and DRC2032 controllers using a Wiegand interface over a 5 wire cable.

Up to a 27 inch read range can be expected from the DCTR-5280 read head depending on the environment and location of the read head.

The DCTR-5280 is supported by all Synergistics stand alone and computer based access control systems operating on both Windows and DOS platforms. The DCTR-5280 uses the PTT928 personnel tag, and dual discriminating ATT944 asset tags and ATT942 wrist tags.



Mid Range Reader Interface - DCTR-5311

Size: 7.68 x 4.33 x 1.57 inches

Weight: 5.0 ounces
 Power: 12 V @ 500 mA

Mounting: 2 #8 wood screws

Construction: Circuit board mounted in ABS case

Color: gray.

Environment: Indoor

Temperature: 0 deg C to +50 deg C.

Relative Humidity: 0% to 90% non-condensing

Data: Wiegand, mag stripe and ASCII.

Cable: 5 wire, 22 AWG, shielded.
 (Belden 8777 or eq.)

Cable Termination:
 Screw Terminals on PCB.

The DCTR-5311 is a controller which interfaces the DCTR-280 environmental read head to the reader controller in Building Watch or WaPac access control or asset tracking systems. This allows the read head to be located outdoors.



This combination of read head and interface allows the user to mount the read head outdoors separate from the DCTR-5311 interface which must be mounted indoors, out of the weather.

The wiring distance between the DCTR-5311 and the read head depends on wire size.

22 AWG = 200m

20 AWG = 300m

The maximum wiring distance between the DCTR-5311 and the reader controller is 500 feet. The DCTR-5311 is supported by the WaPac, WaPac Tracker and Building Watch access control and asset tracking systems.

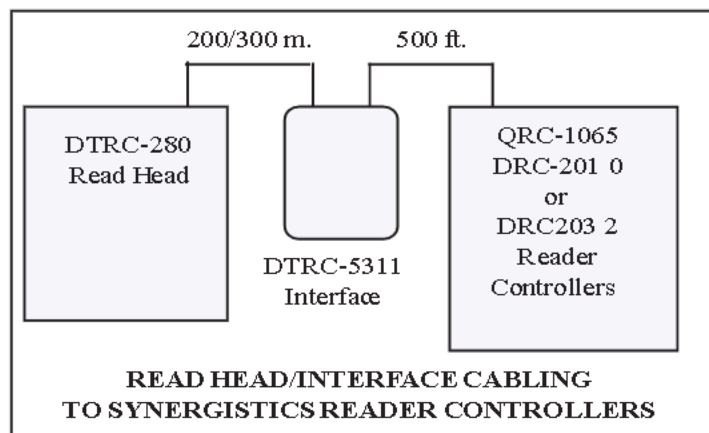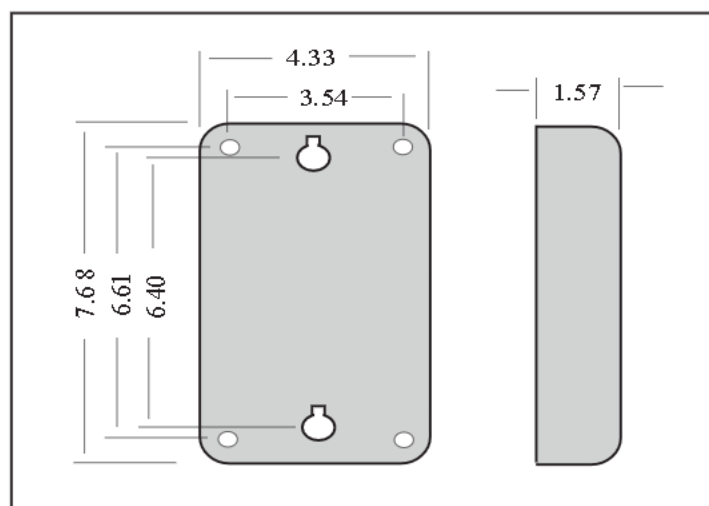

Insertion Card Reader Non-Lighted - IR1051F

IR1051F


Insertion Reader
Mag Stripe
Flush Mounted
Environmental
Non lighted

General Use:

MSLR1
ATM access control

Electrical:

5VDC, 30mA

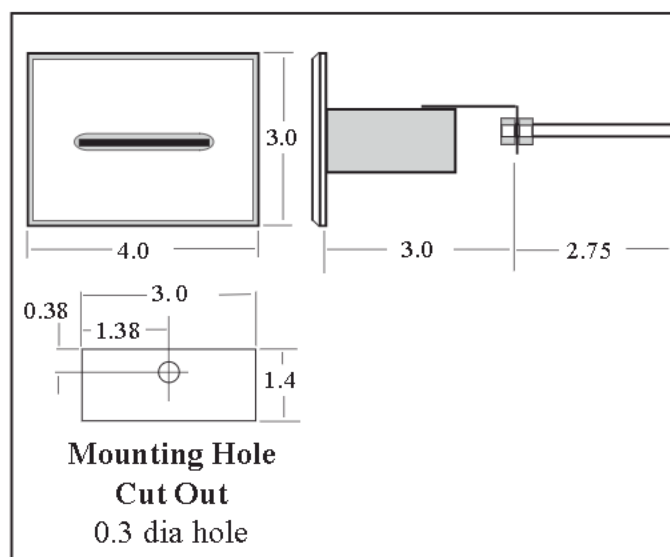


Mechanical:

Weight, 0.5 lbs.
Color, Silver

Interface:

Cable distance 750ft.
4 wire, 22 AWG,
shielded cable.
Ref: Belden 8723

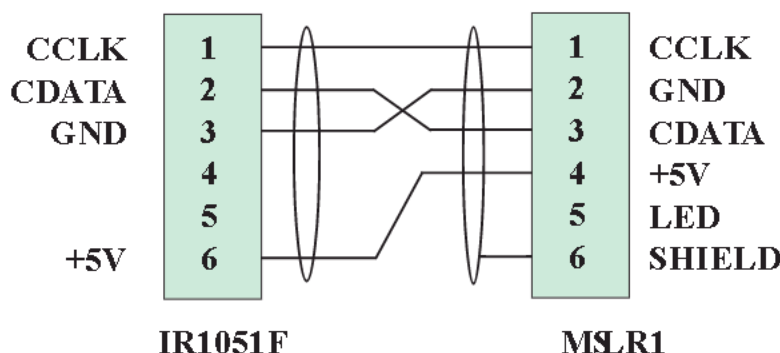

Insertion Card Reader **Lighted - IR1051FL**

IR1051FL

Insertion Reader
 Mag Stripe
 Flush Mounted
 Environmental
 Lighted
 Yellow: power
 Green: Door
 unlocked

Electrical:





5VDC, 30mA

Mechanical:

Weight, 0.5 lbs.
 Color, Silver

Interface:

Cable distance 750ft.
 6 wire, 22 AWG,
 shielded cable.
 Ref: Belden 8777

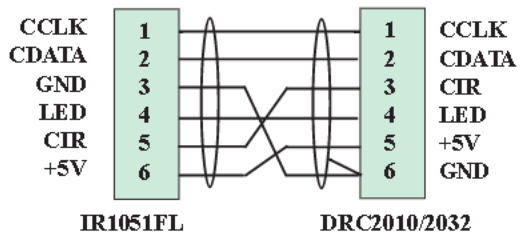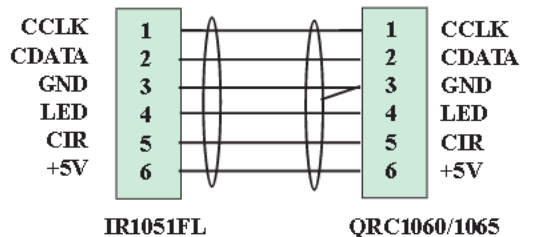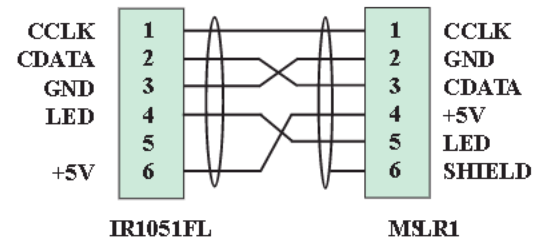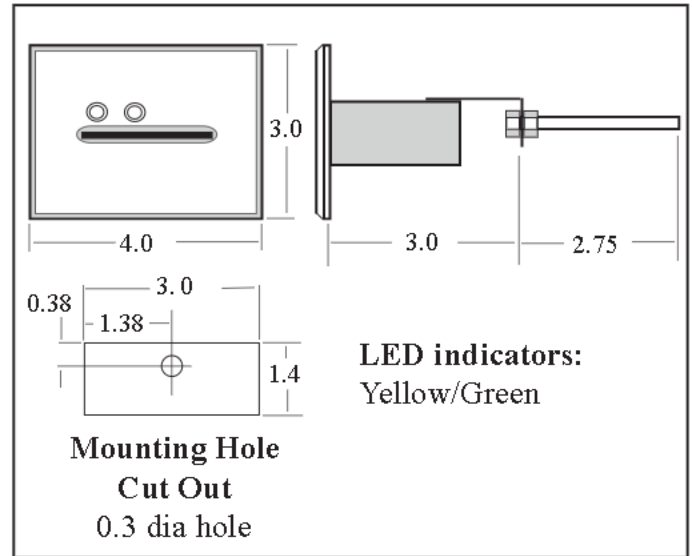

Insertion Card Reader - Lighted - IR1051FLD

IR1051FLD

Insertion Reader
Mag Stripe
Environmental
5x7 Faceplate
Flush Mount
Lighted:
Yellow: Power
Green: Door un-
locked

Electrical:





5VDC, 30mA

Mechanical:

Weight, 2.5 lbs.
Color, Silver

Interface:

Cable distance 750ft.
6 wire, 22 AWG,
shielded cable.

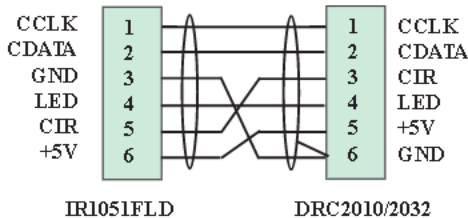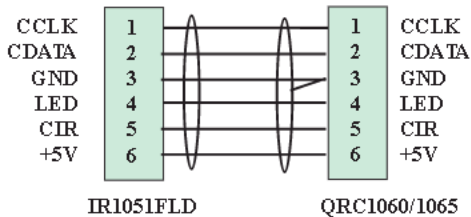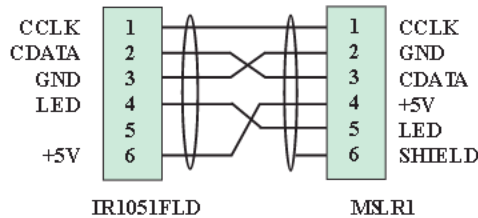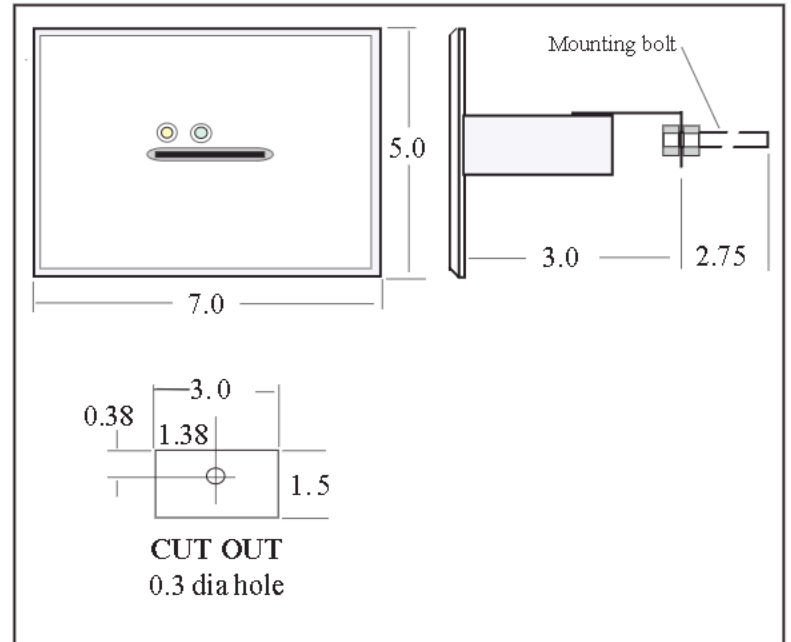



Insertion Card Reader - Lighted - IR1051FLG

IR1051FLG

Insertion Reader
 Mag Stripe
 Environmental
 5x7 Faceplate
 Mounting:
 Dual Gang Box
 Flush Mounted
 Lighted:
 Yellow: Power
 Green:
 Door unlocked

Electrical:





5VDC, 30mA

Mechanical:

Weight, 2.5 lbs.
 Color, Silver

Interface:

Cable distance 750ft.
 6 wire, 22 AWG,
 shielded cable.
 Ref: Belden 8777

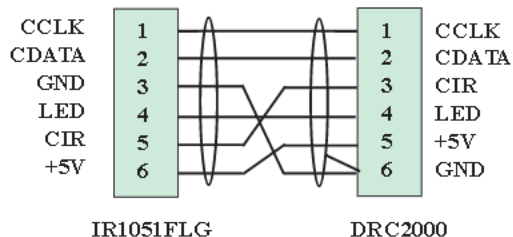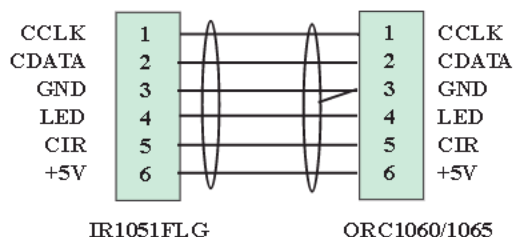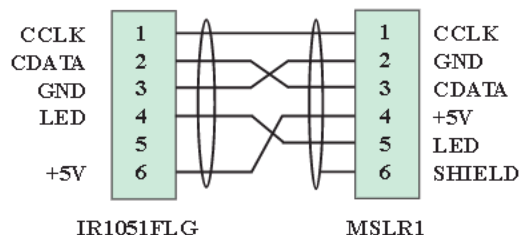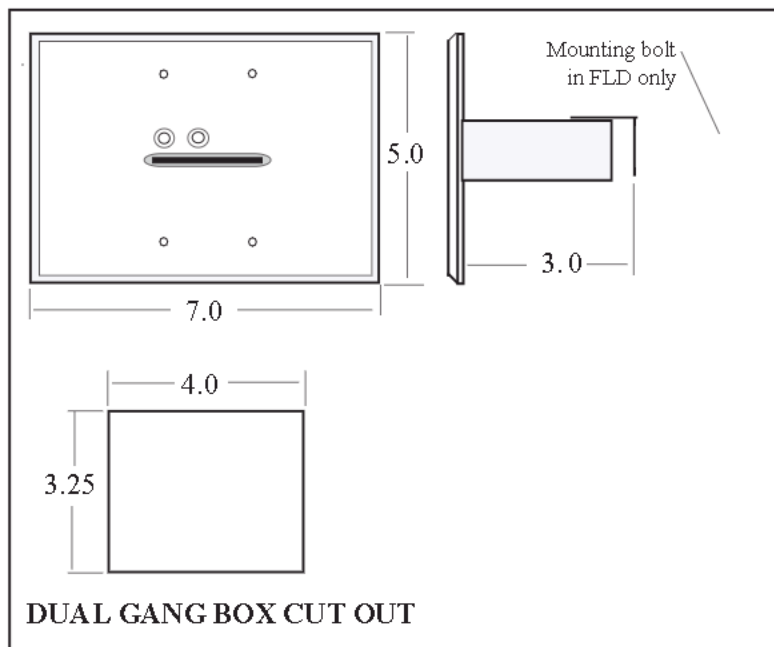

Narrow Insertion Card Reader - IR1051FLN



IR1051FLN

Insertion Reader
 Narrow, Vertical
 Mullion Mount
 Flush Mounted
 Mag Stripe
 Environmental
 Lighted
 Yellow: Power On
 Green: Door Unlocked

Electrical:





5VDC, 30mA

Mechanical:

Weight, 0.5 lbs.
 Color, Silver

Interface:

Cable distance 750ft.
 6 wire, 22 AWG,
 shielded cable.
 Ref: Belden 8777

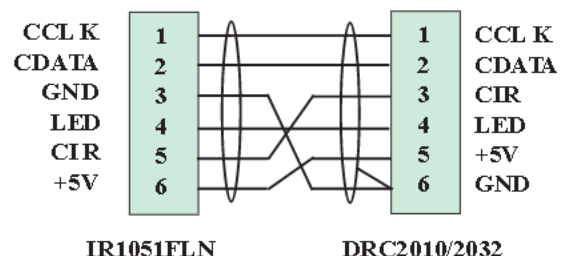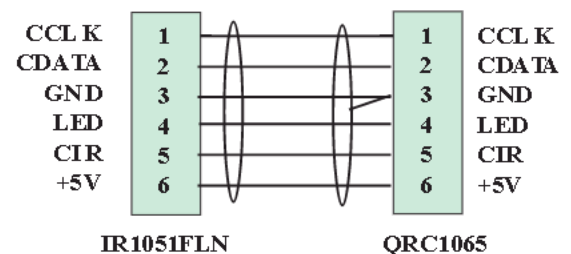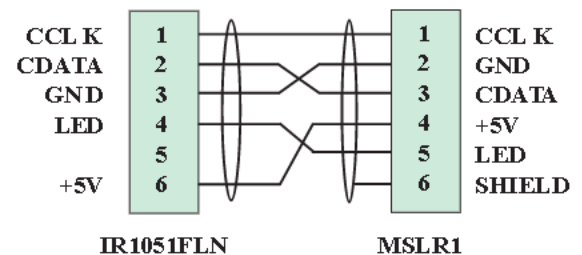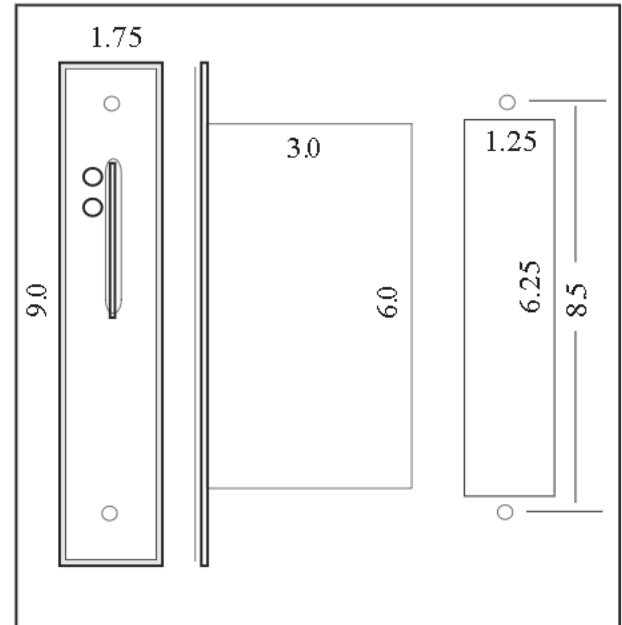



Narrow Insertion Card Reader - IR1051FLN2

IR1051FLN2

Insertion Reader
Narrow, Vertical
Mullion Mount
Flush Mounted
Mag Stripe
Environmental
Lighted
Yellow: Power On
Green: Door Unlocked

Electrical:





5VDC, 30mA

Mechanical:

Weight, 0.5 lbs.
Color, Silver

Interface:

Cable distance 750ft.
6 wire, 22 AWG,
shielded cable.
Ref: Belden 8777

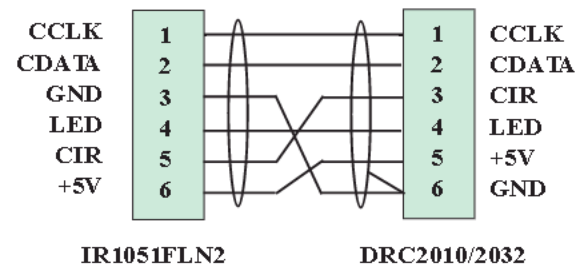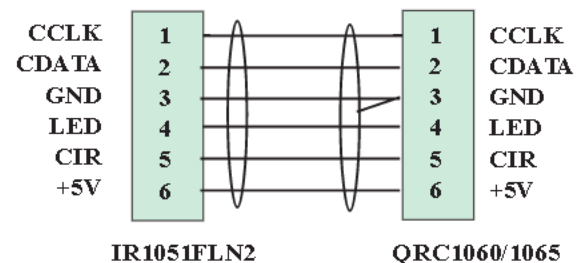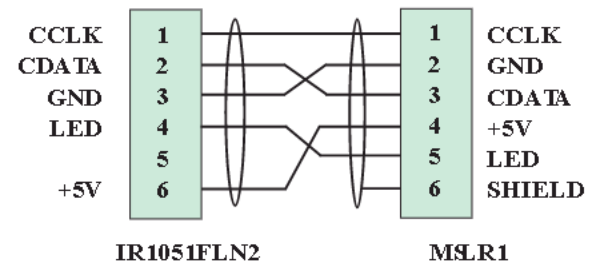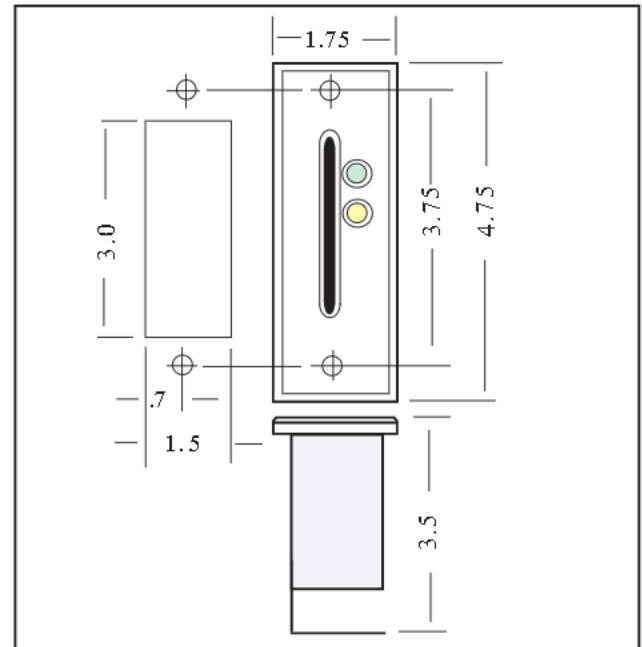



Insertion Card Reader **Narrow, Short, Lighted - IR1051FLNS**

IR1051FLNS

Insertion Reader
 Mag Stripe
 Environmental
 Flush Mount
 Mullion Mount
 Short Frame
 Narrow
 Lighted:
 Yellow: Power on
 Green: Door Un-
 locked

Electrical:



5VDC, 30mA

Mechanical:

Weight, 0.5 lbs.
 Color, Silver

Interface:

Cable distance 750ft.
 6 wire, 22 AWG,
 shielded cable.
 Ref: Belden 8777

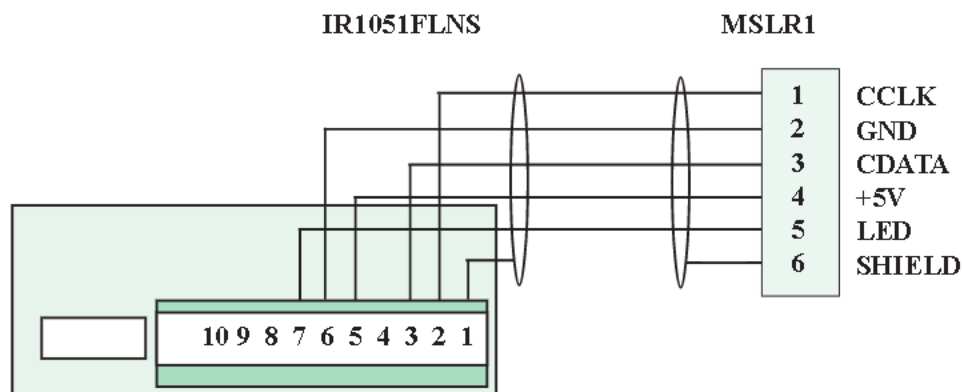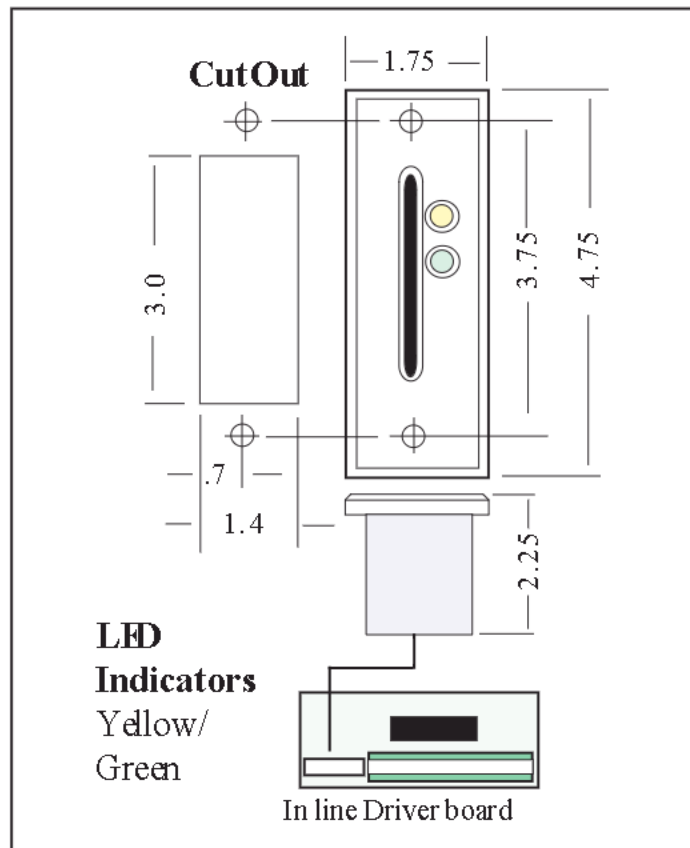

Insertion Card Reader **Lighted, Post Mount - IR1051PL**

IR1051PL

Our standard IR1051 insertion card reader mounted on a 42 inch bronze post.

Insertion Reader

Mag Stripe
 Environment
 Post Mounted
 Lighted:
 Yellow: Power on
 Green: Door unlocked

Electrical:





5VDC, 30mA

Mechanical:

Color: Bronze Post
 Silver Reader

Interface:

Cable distance 750ft.
 6 wire, 22 AWG, shielded cable.
 Ref: Belden 8777

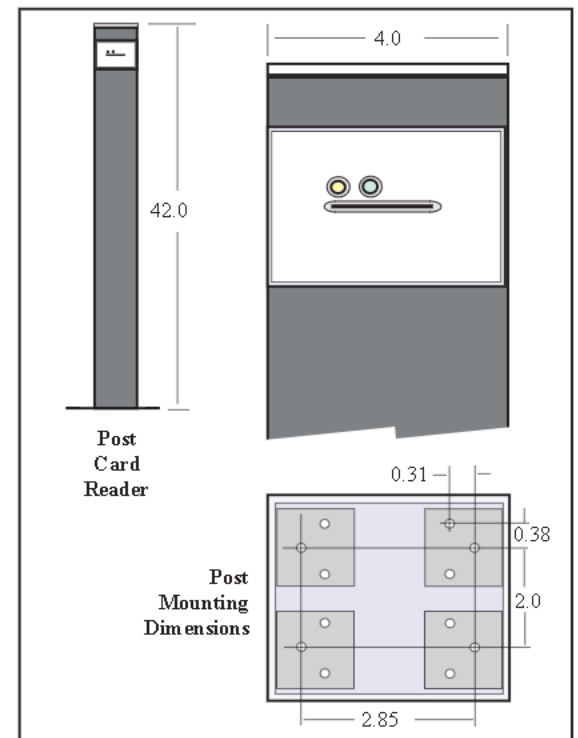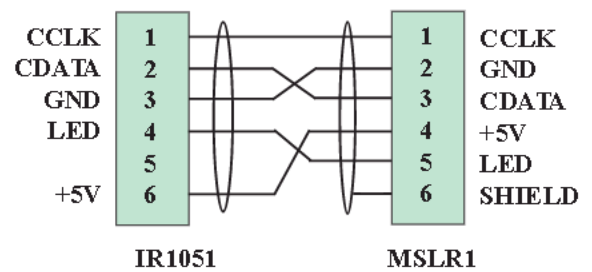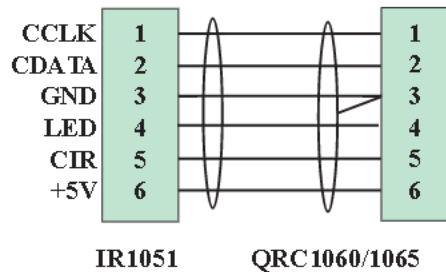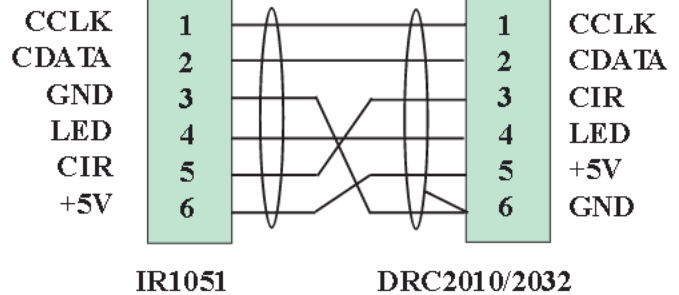

Insertion Card Reader Lighted, Surface Mount - IR1051SL

IR1051SL

Insertion Reader
Mag Stripe
Environmental
Surface Mounted
Lighted
Yellow: Power on
Green: Door un-
locked

Electrical:

5VDC, 30mA

Mechanical:

Weight, 2.5 lbs.





Color, Silver

Interface:

Cable distance 750ft.

6 wire, 22 AWG,
shielded cable.

Ref: Belden 8777

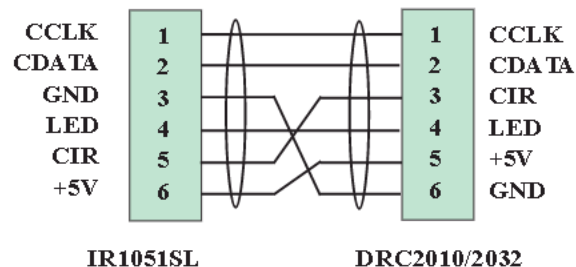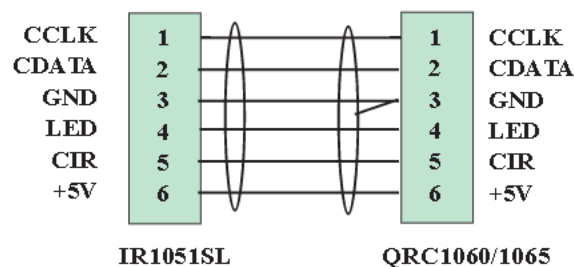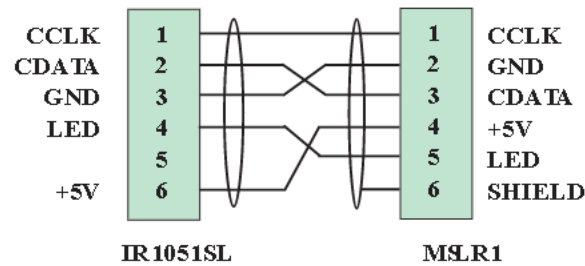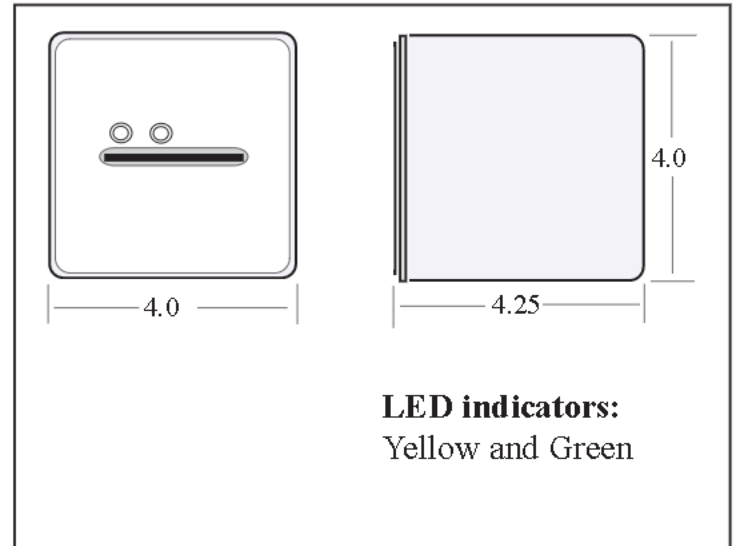

Bar Code Card Reader with PIN Keypad - KBSR1059FL

KBSR1059FL




Bar Code Card Reader
 PIN Keypad
 Indoor
 Flush Mount
 Lighted
 Black Anodize Finish

Connector Pins

1 Card Clock
 2 Card Data
 3 DC/Signal Ground
 4 Green LED Control
 5 Card In Reader
 6 +5VDC

Led Indicators

Yellow - Power ON
 Green - Door Unlocked

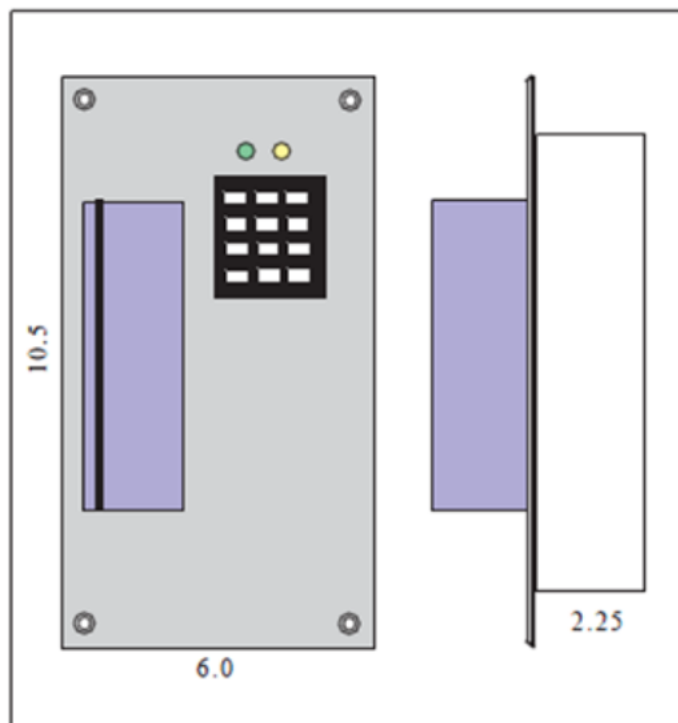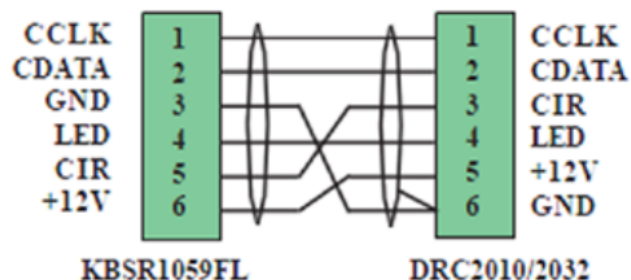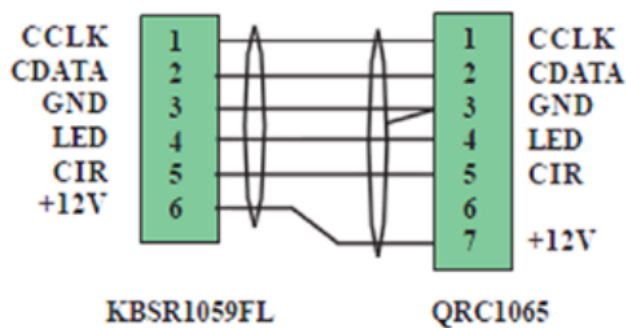



Bar Code Card Reader with PIN Keypad - KBSR1059SL

KSR1055SL

Pin Keypad
Mag Stripe
Swipe Reader
Indoor
Surface Mounted
Lighted:
yellow: Power on
green: Door unlocked

Electrical:




12VDC, 130mA

Mechanical:

Material:
Painted Alum.
Purlane White
Weight: 2.7 lbs.

Interface:

Cable distance 500ft.
6 wire, 22 AWG,
shielded cable.
Ref: Belden 8777

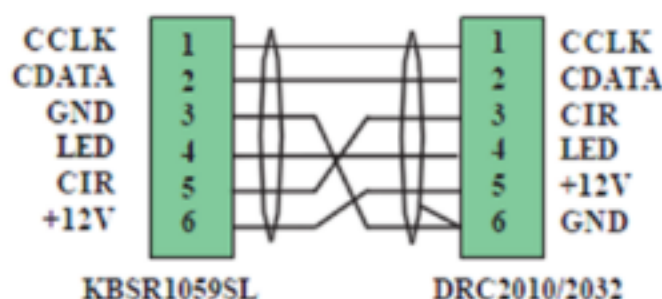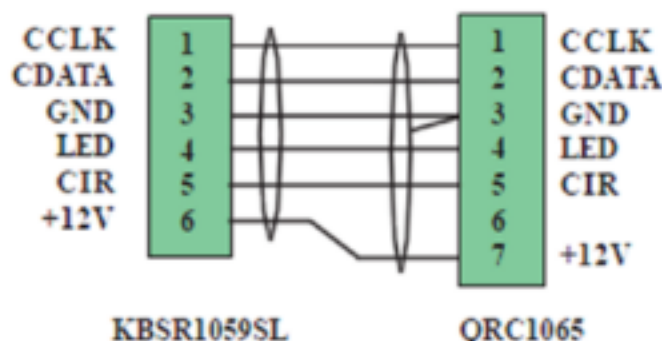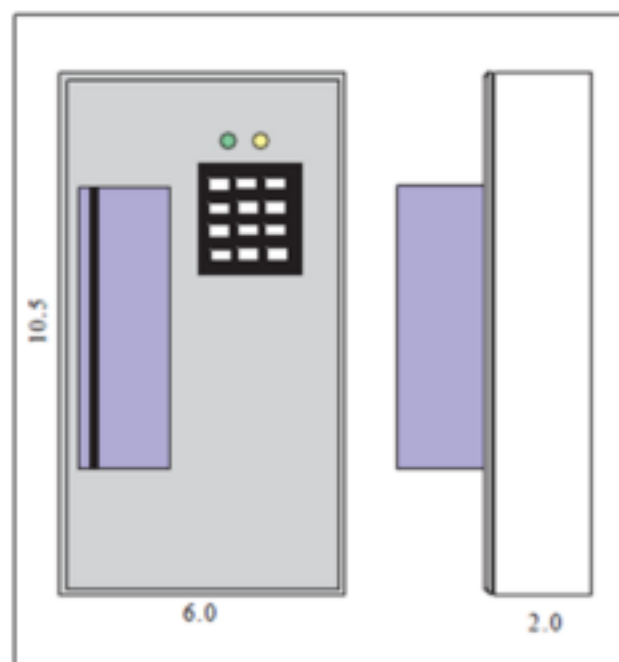

HID - ProxPro Card Reader - KP-5355


Synergistics
PREMIER BANKING
 ATM ACCESS CONTROL

Proximity Reader,

Lighted

Indoor or Outdoor

Wiegand Protocol

Warranty: Lifetime

Specifications:

Typical Read Range

ProxCard II 9 inches

ISOProx II 6 inches

ProxKey II 3 inches

ProxCard Plus 3 inches

Electrical

Voltage = +10 to 28.5VDC

Linear P.S. recommended

Current = 100 mA average

160 mA peak

Mechanical

Size: 5.0 x 5.0 x 1.0 in.

Weight: 12 oz.

Polycarbonate UL 94

Reader Mounting:

 Surface mounting over
 single gang box.

Interface: Wiegand

Cable distance Max. 500 ft.

22 AWG, 5 cond., shielded.

Additional wire required




for LED and Beeper.

Ref: Belden 8777

Operating Temperature:

-22 deg. to +150 deg F.

95% humidity.

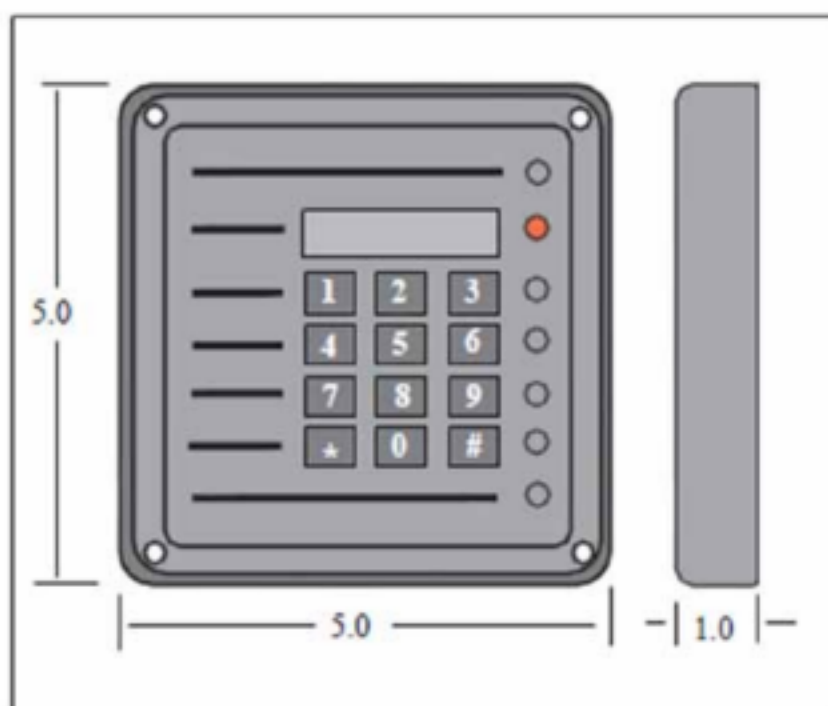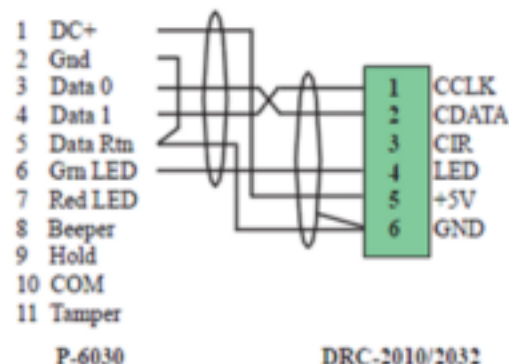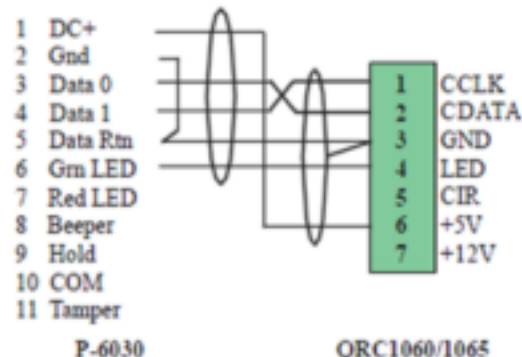

Indoor Swipe Card Reader - KSR1055SL

KSR1055SL

Pin Keypad
 Mag Stripe
 Swipe Reader
 Indoor
 Surface Mounted
 Lighted:
 yellow: Power on
 green: Door unlocked

Electrical:




12VDC, 130mA

Mechanical:

Material:
 Painted Alum.
 Purlane White
 Weight: 2.7 lbs.

Interface:

Cable distance 500ft.
 6 wire, 22 AWG,
 shielded cable.
 Ref: Belden 8777

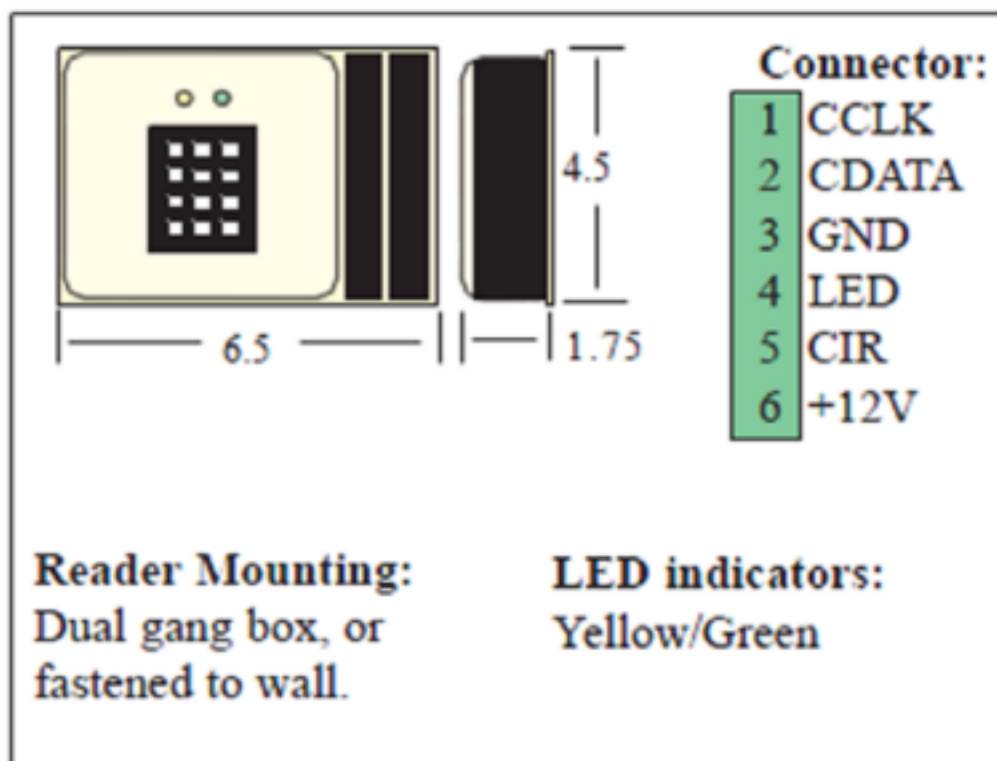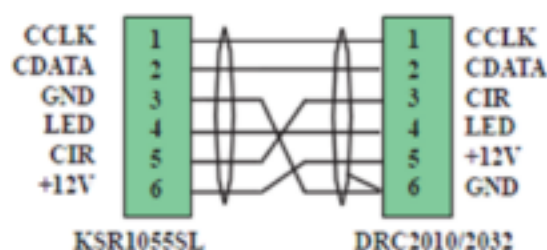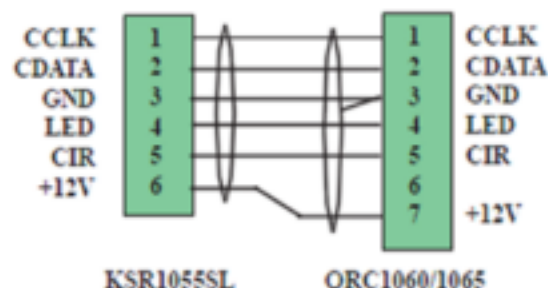



PIN Keypad Swipe Card Reader - KSR1058SL/SLEH

KSR1058SL/SLEH

Mag Stripe
Swipe Reader
Pin Keypad
SL Indoor
SLEH: Outdoor
(Hooded)
Surface Mounted
to wall, or mounted
over single gang box.
Lighted:
Yellow: Power on
Green: Door unlocked

Electrical:




12VDC, 130mA

Mechanical:

Weight: 1.5 lbs.
Color: Silver

Interface:

Cable distance 500ft.
6 wire, 22 AWG,
shielded cable.
Ref: Belden 8777

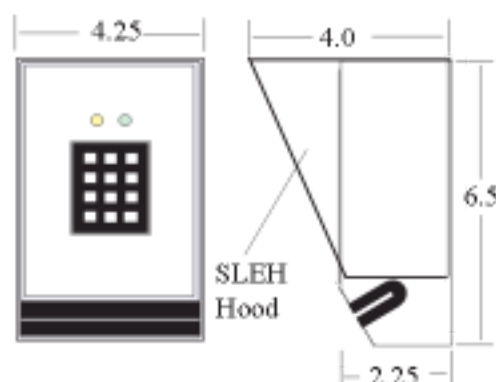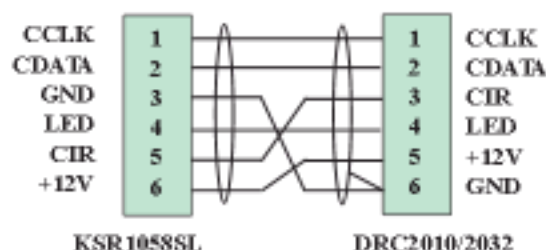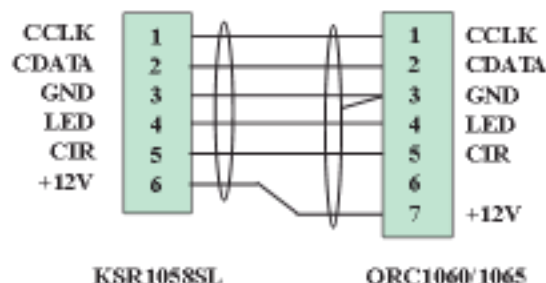

Connector:


- 1 CCLK
- 2 CDATA
- 3 GND
- 4 LED
- 5 CIR
- 6 +12V

LED indicators:

FL - Yellow/Green

Reader Mounting:

Single gang box, or
fastened to wall.



Parking Log

Keypad Card Reader - KSR1066PKLH


SR1066PKLH

KSR1066SLEH keypad card reader mounted on a 43 inch post for parking lot installations.

Mag Stripe
Swipe Reader
Keypad,
(Telephone Style)


Hooded
Parking lot
Post Mounted
Environmental
Lighted:
Yellow: Power on
Green: Gate active

Electrical:
12VDC, 130mA

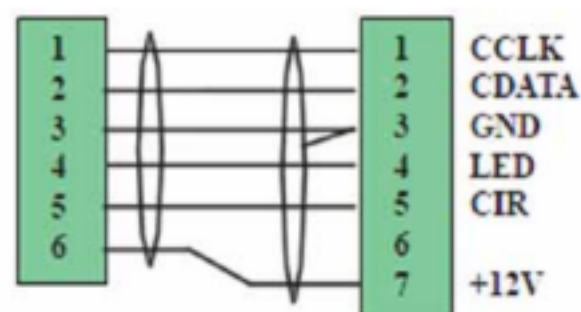


KSR1065PKL

QRC1060/1065

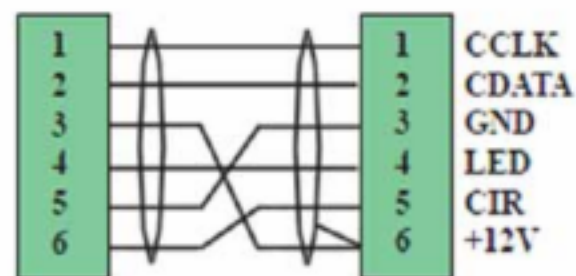

KSR1065PKL

DRC2010/2032

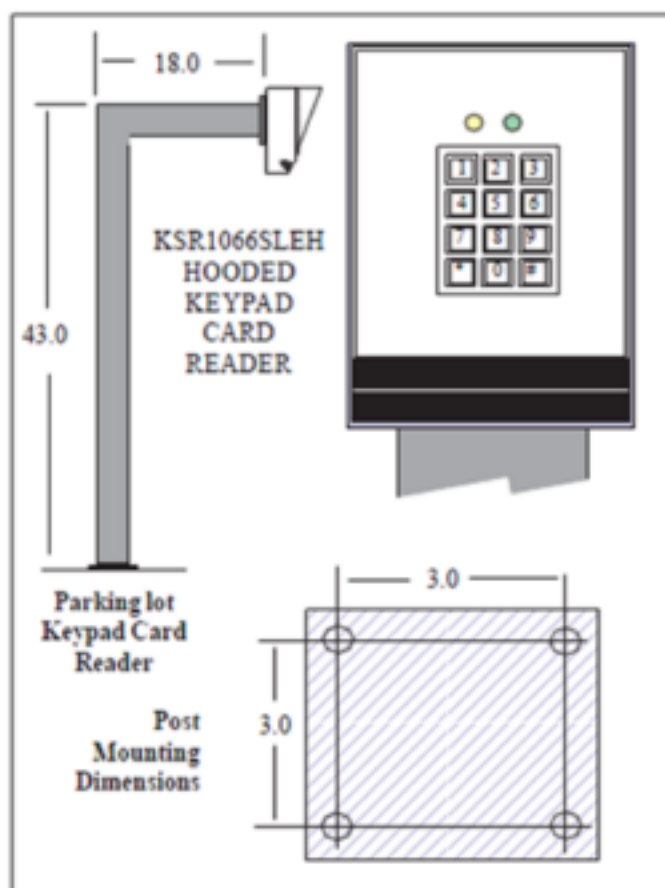

Mechanical:

Color:
Post: Black Alum.
Reader: Silver

Interface:

Cable distance
500ft.
6 wire, 22 AWG,
shielded cable.
Ref: Belden 8777



Environmental Keypad Swipe Card Reader - KSR1066SL/SLEH

KSR1066SL/SLEH

Mag Stripe
Swipe Reader
PIN Keypad
(Telephone Style)
SL Indoor
SLEH: Outdoor, *
(Hooded)
Surface Mounted
to wall, or mounted
over single gang box.
Lighted:
Yellow: Power on
Green: Door unlocked

Electrical:

12VDC, 130mA




Mechanical:

Weight: 1.5 lbs.
Color: Black/Silver

Interface:

Cable distance 500ft.
6 wire, 22 AWG,
shielded cable.
Ref: Belden 8777

* (Note: Do not expose
to cascading water.)

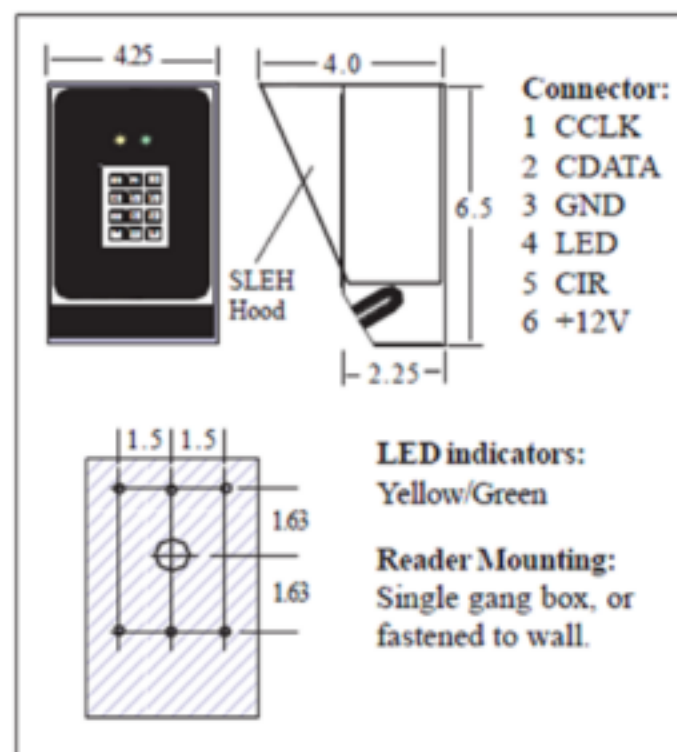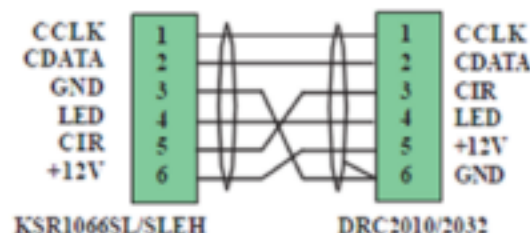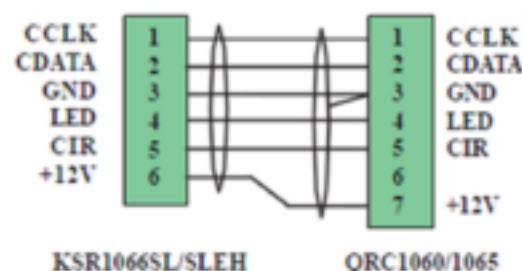

HID - MaxiProx Card Reader - MX-5375

Proximity Reader,

Lighted
 Indoor or Outdoor
 Wiegand Protocol
 Warranty: Lifetime
 Specifications:

Typical Read Range

Vehicle ID Tag 30 inches
 ProxCard II 24 inches
 ISOProx II 16 inches
 ProxKey II 12 inches
 ProxCard Plus 9 inches

Electrical

Current = 1 A average
 1.7 A peak
 An external 24VDC power supply is required and supplied by Synergistics with this reader.

Mechanical

Size: 11.8 x 11.8 x 1.0 in.
 Weight: 51 oz.
 Polycarbonate UL 94



Reader Mounting:

Surface mounting over nonmetallic surface.

Interface: Wiegand
 Cable distance Max. 500 ft.
 22 AWG, 5 cond., shielded.
 Additional wire required for LED and Beeper.
 Ref: Belden 8777

Operating Temperature:

-22 deg. to +150 deg F.
 95% humidity.

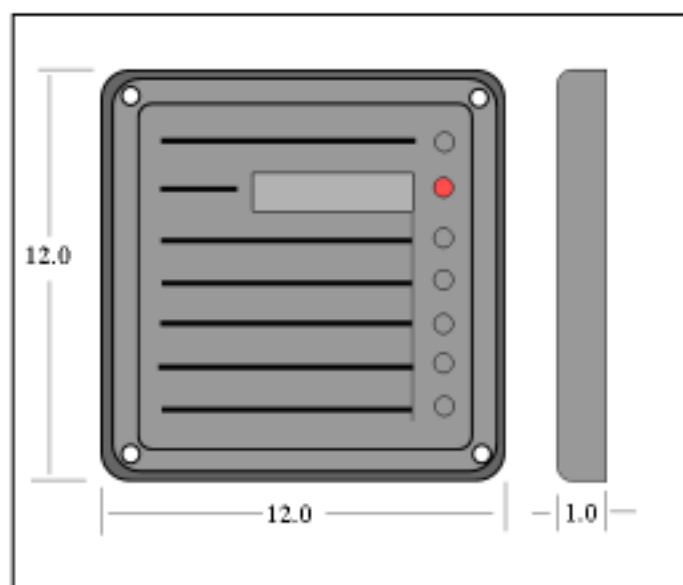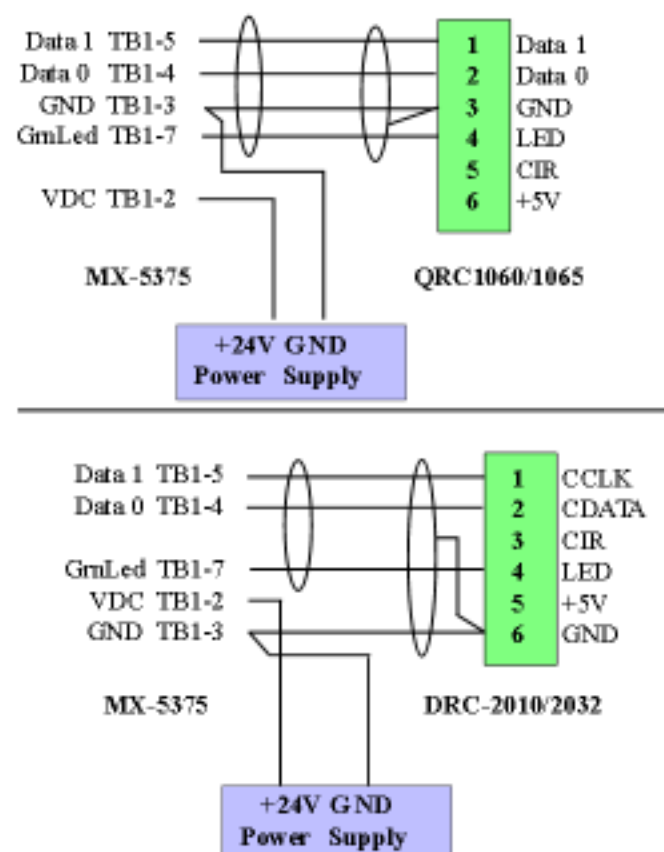

HID - ProxPro Card Reader - P-5355

Proximity Reader,

Lighted
 Indoor or Outdoor
 Wiegand Protocol
 Warranty: Lifetime
 Specifications:

Typical Read Range

ProxCard II 9 inches
 ISOProx II 6 inches
 ProxKey II 3 inches
 ProxCard Plus 3 inches

Electrical

Voltage = +10 to 28.5VDC
 Linear P.S. recommended
 Current = 100 mA average
 160 mA peak

Mechanical

Size: 5.0 x 5.0 x 1.0 in.
 Weight: 12 oz.
 Polycarbonate UL 94

Reader Mounting:




Surface mounting over
 single gang box.

Interface: Wiegand

Cable distance Max. 500 ft.
 22 AWG, 5 cond., shielded.
 Additional wire required
 for LED and Beeper.
 Ref: Belden 8777

Operating Temperature:

-22 deg. to +150 deg F.
 95% humidity.

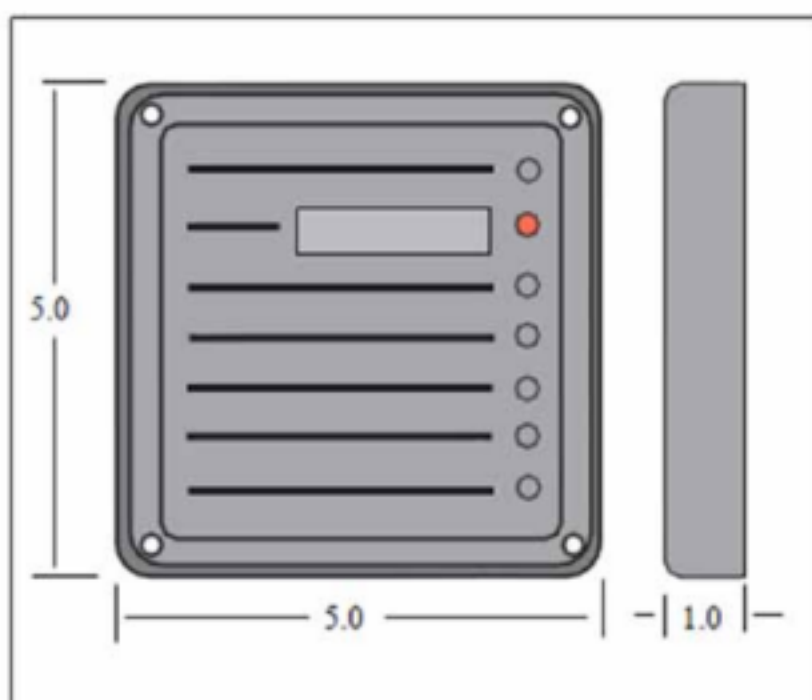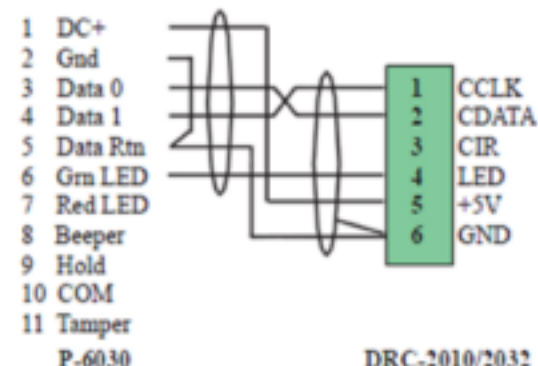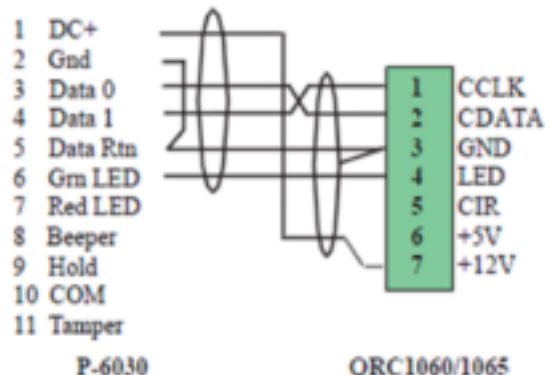

HID - MiniProx Card Reader - P-5365

Proximity Reader,

Lighted
Indoor or Outdoor
Wiegand Protocol
Warranty: Lifetime
Specifications:

Typical Read Range

4.0 inches

Electrical

Voltage = +4.75 to +16V
Current = 40 mA average
80 mA peak

Mechanical

Size: 6.0 x 1.7 x 1.0
Weight: 6.6 oz.
Polycarbonate UL 94

Reader Mounting:

Surface, Mullion mounting
Mount on Metal
Mount dimensions:
5.25 inches, vertical

Interface:

Wiegand protocol.
Cable distance Max. 500 ft.




Operating Temperature:
-22 deg. to +150 deg F.

Operating Humidity:

0 - 95% noncondensing

Cable distance:

500 feet, 22AWG
Ref: Belden 8777

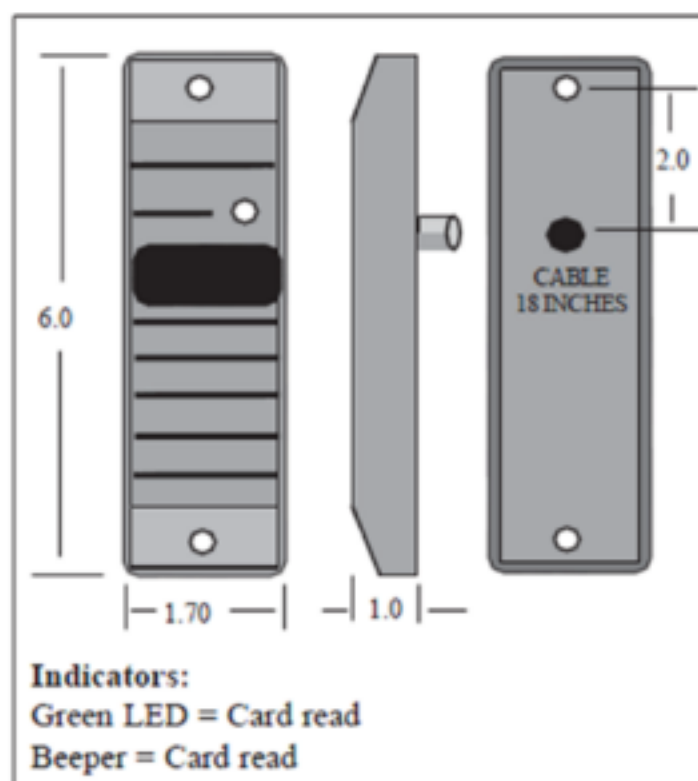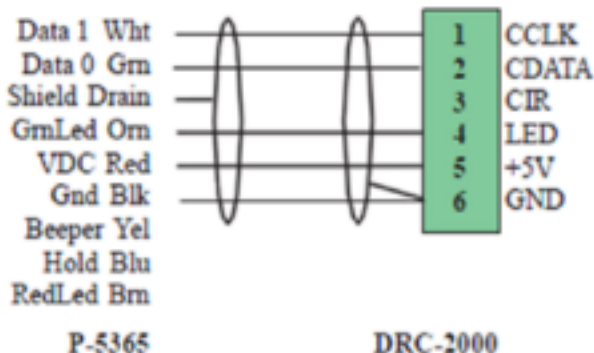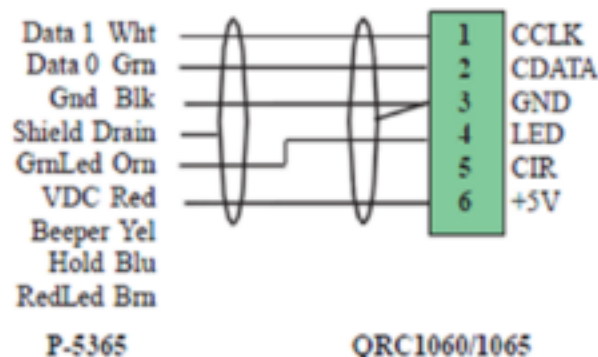



HID - ProxPoint Card Reader - P-6005

Proximity Reader, Lighted
 Indoor or Outdoor
 Wiegand Protocol
 Warranty: Lifetime
 Specifications:

Typical Max. Read Range

ProxCardII = 3.75 in.
 ISOProx II = 2.3 in.
 ProxKey II = 1.7 in.
 ProxCard Plus = 1.2 in.

Electrical

Voltage = +4.75 to +16V
 Average Current = 35mA

Mechanical




Size: 3.135 x 1.70 x 0.51
 Polycarbonate UL 94

Interface:

Wiegand protocol.
 Max. distance to controller:
 500 ft.
 22 AWG, 4 wire, shielded cable.
 Ref: Belden 8777

Operating Temperature:

-22 deg. to +150 deg F.

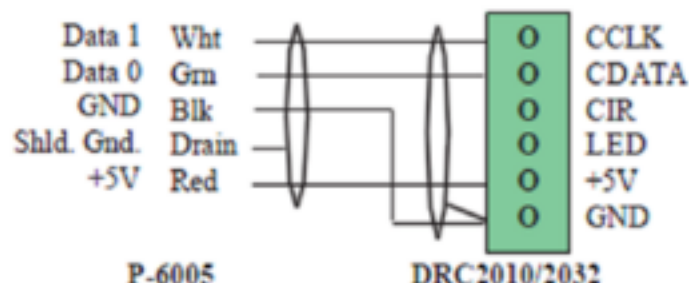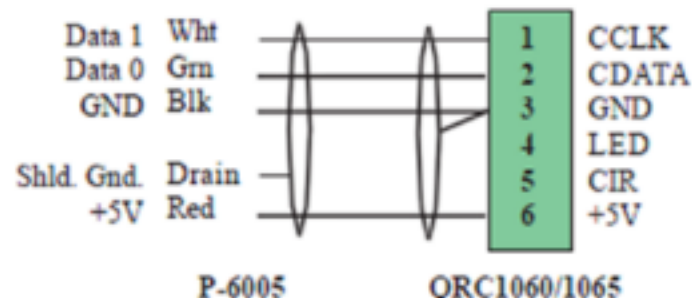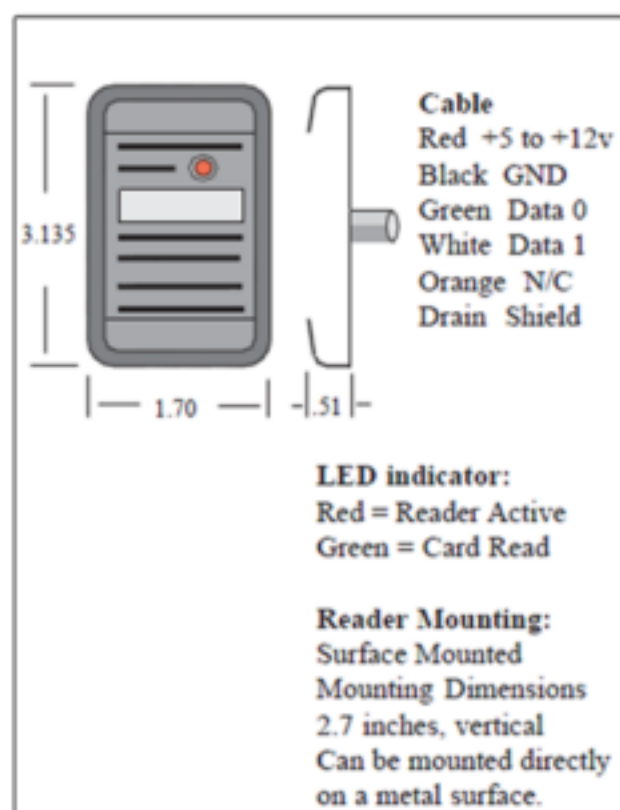

HID - ProxPro Plus Card Reader - P-6030

Proximity Reader,

Lighted
Indoor or Outdoor
Wiegand Protocol
Warranty: Lifetime
Specifications:

Typical Read Range

ProxCard II 9 inches
ISOProx II 6 inches
ProxKey II 3 inches
ProxCard Plus 3 inches

Electrical

Voltage = +10 to 28.5VDC
Linear P.S. recommended
Current = 100 mA average
160 mA peak

Mechanical

Size: 7.5 x 7.5 x 0.9 in.
Weight: 15 oz.
Polycarbonate UL 94

Reader Mounting:

Surface mounting
or Glass mount (opt.)



Mounting dimensions:
6.5 inches on corners.

Interface: Wiegand

Cable distance Max. 500 ft.
22 AWG, 5 cond., shielded.
Additional wires required
for LED and Beeper.
Ref: Belden 8777


Operating Temperature:

-22 deg. to +150 deg F.
95% humidity.

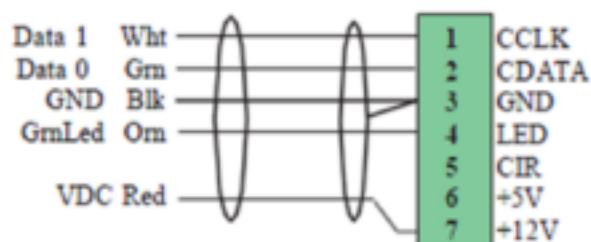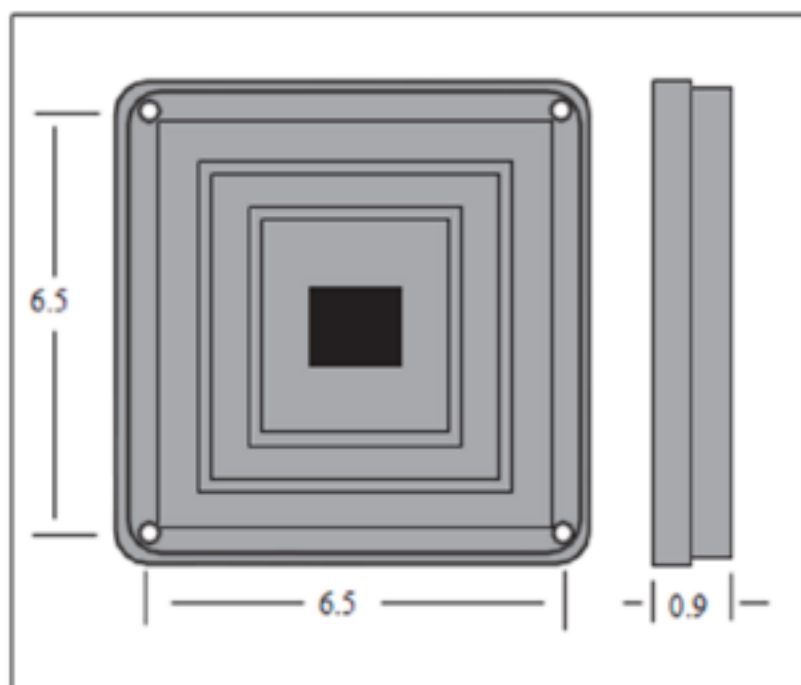

P-5355

QRC1060/1065

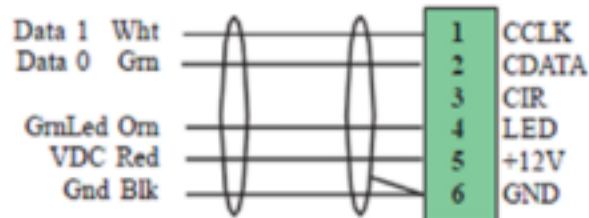

P-5365

DRC-2010/2032



Mullion Swipe Reader Surface Mount - SR1053SLM

SR1053SLM

Swipe Reader
Mag Stripe
Indoor
Surface Mullion Mount
Lighted:
Green: Door unlocked

Electrical:

5VDC, 30mA



Mechanical:

Weight: 0.7 lbs.
Color: Silver/Black

Interface:

Cable distance 750ft.
6 wire, 22 AWG, shld. cable.

Ref: Belden 8777

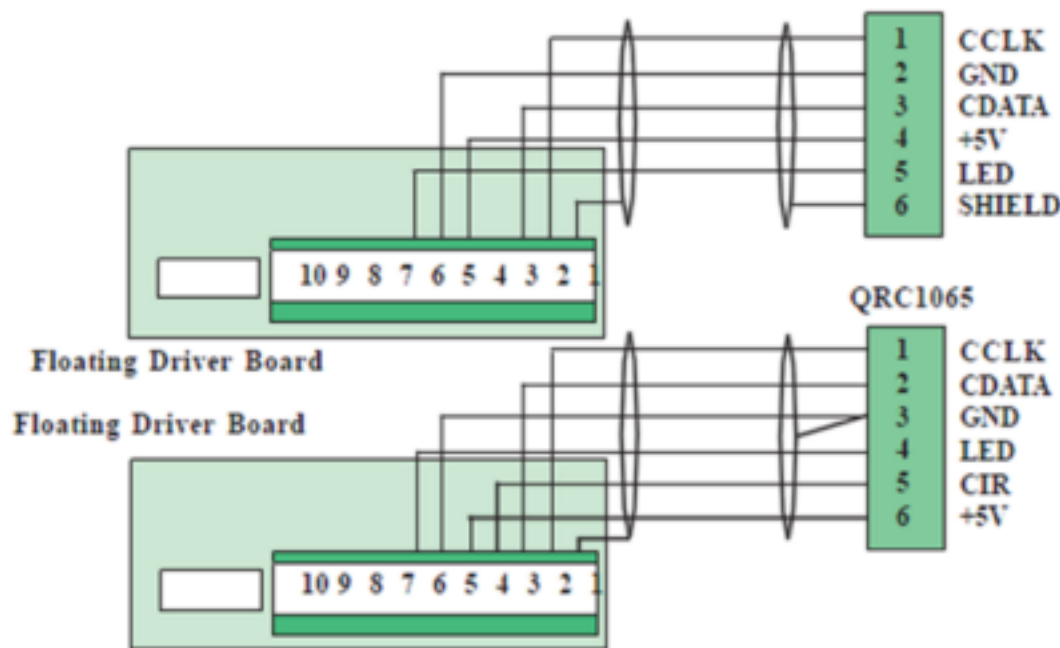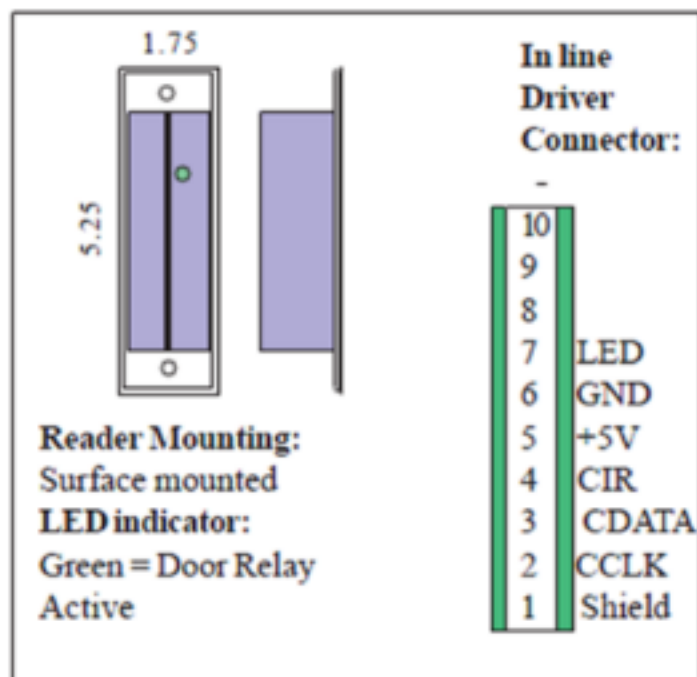

Indoor Swipe Reader - SR1054FL

SR1054FL

Swipe Reader
 Mag Stripe
 Indoor Mounting
 Flush Mounted on
 Dual Gang Box
 Lighted
 Green: Door
 unlocked

Electrical:



5VDC, 30mA

Mechanical:

Weight: 0.5 lbs.
 Color, Chrome

Interface:

Cable distance 750ft.
 6 wire, 22 AWG,
 shielded cable.

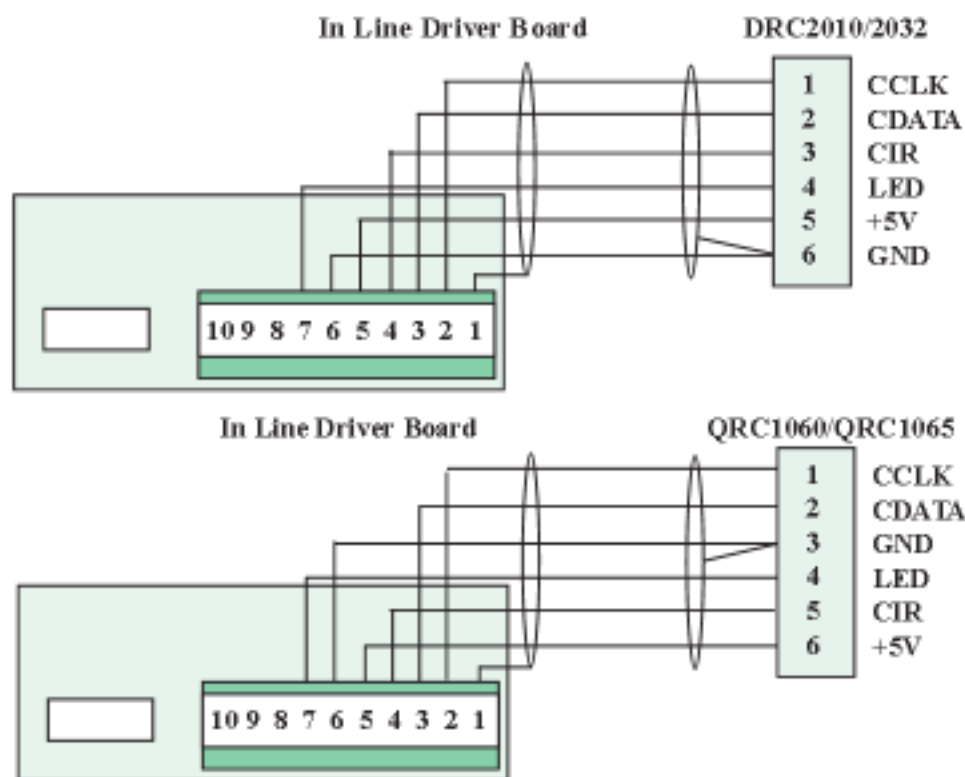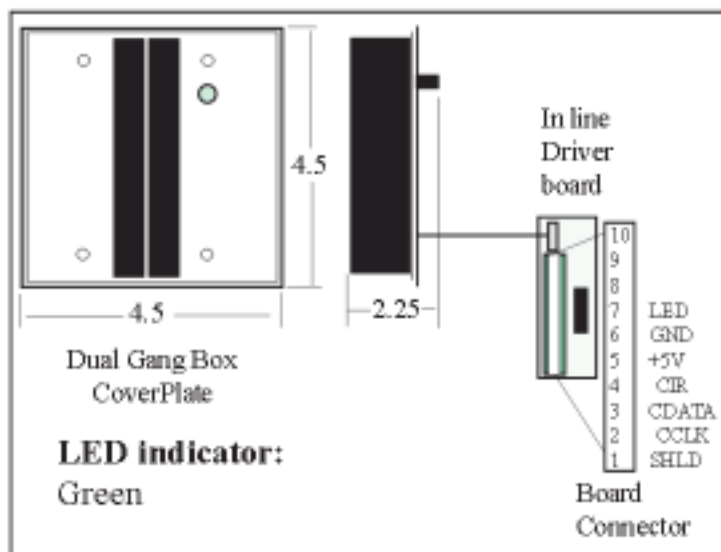

Indoor Swipe Card Reader - SR1055SL



SR1055SL

Swipe Reader
Mag Stripe
Indoor
Surface Mounted
Lighted
yellow: Power on
green: Door unlocked

Electrical:


5VDC, 30mA

Mechanical:

Weight 0.5 lbs.
Color:
Pantone White

Interface:

Cable distance 750ft.
6 wire, 22 AWG,
shielded cable.
Ref: Belden 8777

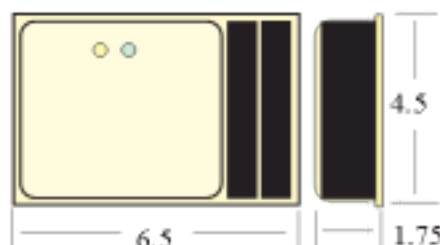

Connector:



- 1 CCLK
- 2 CDATA
- 3 GND
- 4 LED
- 5 CIR
- 6 +5V

Reader Mounting:

Dual gang box, or
directly on wall.

LED indicators:

FL - Yellow/Green

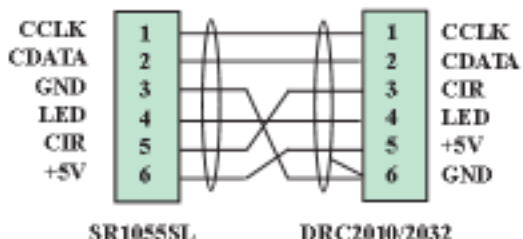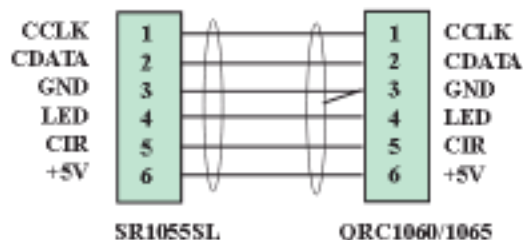

Parking Lot Card Reader - SR1058PKL

SR1058PKL

SR1058SLE card reader mounted on a 43 inch post for parking lot installations.

Swipe Reader
Parking lot
Mag Stripe
Post Mounted
Environmental
Lighted:
Yellow: Power on
Green: Gate active

Electrical:




5VDC, 30mA

Mechanical:

Color: Silver
Post: Black

Interface:

Cable distance 750ft.
6 wire, 22 AWG, shielded cable.
Ref: Belden 8777

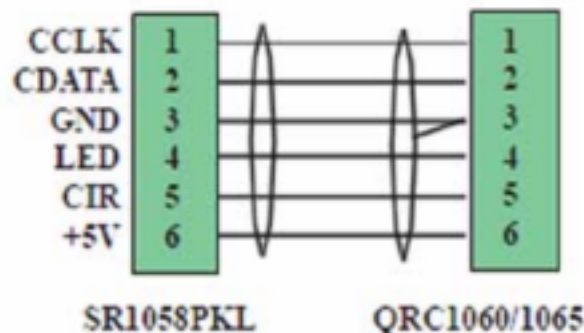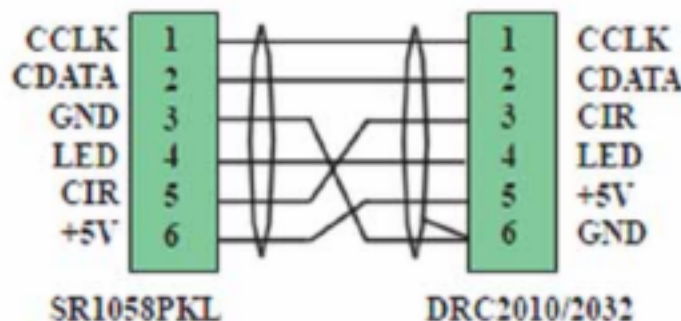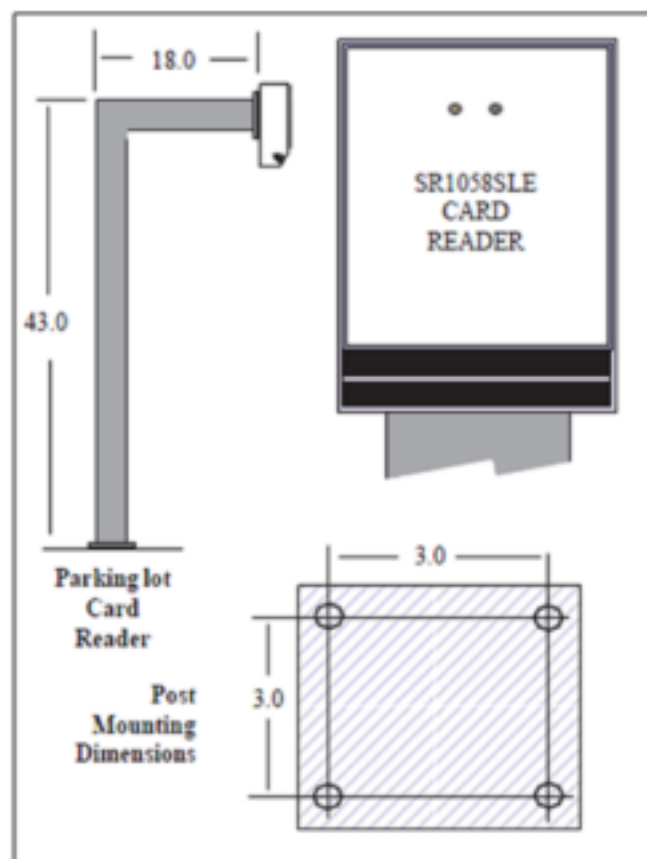

Outdoor Swipe Card Reader - SR1058SLE

SR1058SLE

Swipe Reader
 Mag Stripe
 Environmental
 Surface Mounted
 to wall, or mounted
 over single gang box.
 Lighted
 Yellow: Power on
 Green: Door unlocked

Electrical:

5VDC, 30mA

Mechanical:

Weight: 1.2 lbs.

Color: Silver




Interface:

Cable distance 750ft.

6 wire, 22 AWG,

shielded cable.

Ref: Belden 8777

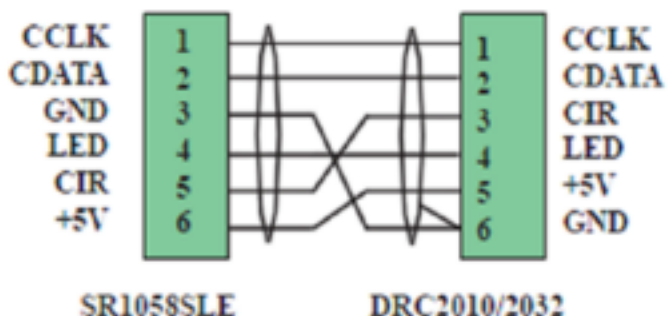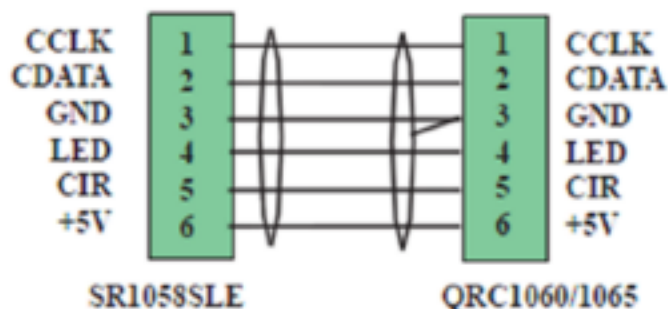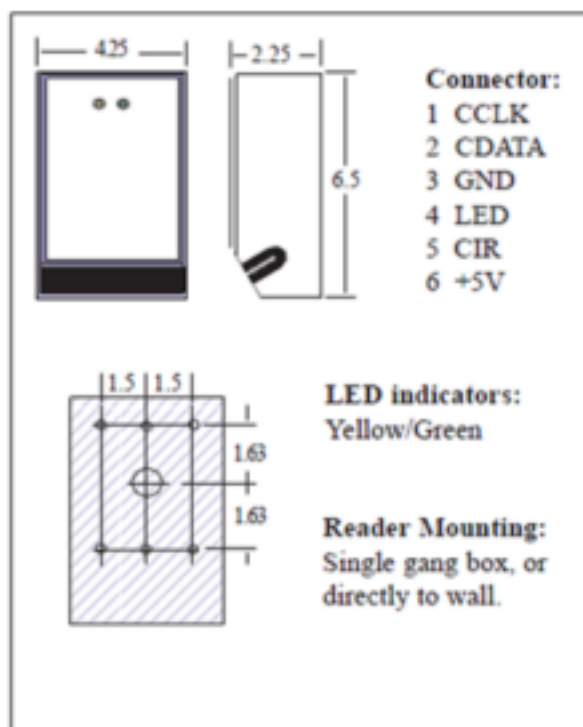

Indoor/Outdoor - Swipe Card Reader - SR1063FL

SR1063FL

Swipe Reader
 Mag Stripe
 Environmental
 Flush Mounted
 Lighted:
 Yellow: Power on
 Green: Door
 unlocked

Electrical:


5VDC, 30mA

Mechanical:



Weight: 2.3 lbs.
 Color: Silver

Interface:

Cable distance 750ft.
 6 wire, 22 AWG,
 shielded cable.
 Ref: Belden 8777

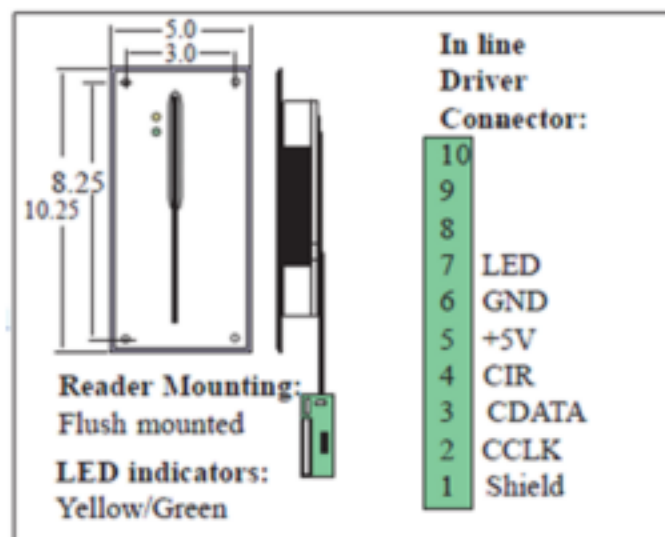

Temperature: -22deg. to +150deg. F
 Humidity: 95% non condensing

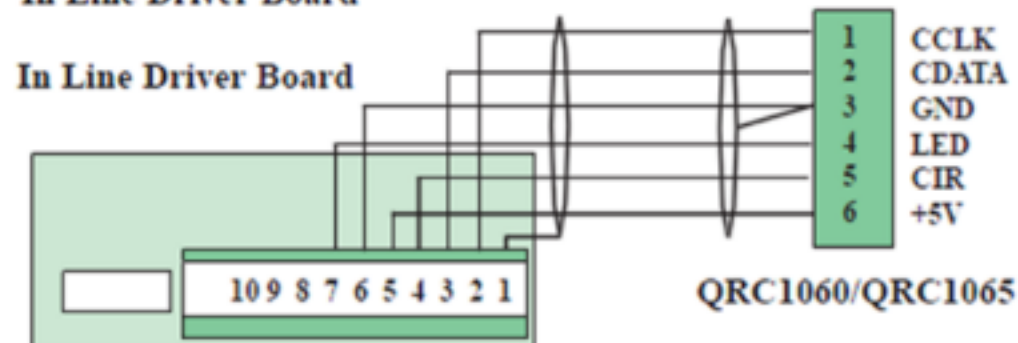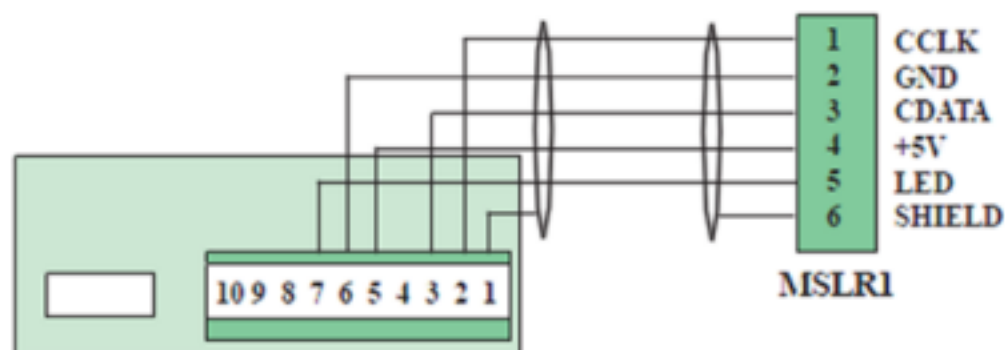



Indoor/Outdoor Narrow, Swipe Card Reader - SR1063FLN



SR1063FLN

Swipe Reader
Mag Stripe
Environmental
Flush Mounted
In-Wall Driver
Lighted:
Yellow: Power On
Green: Door unlocked

Electrical:


5VDC, 30mA

Mechanical:


Weight: 1.5 lbs.
Color: Silver

Interface:

Cable distance 750ft.
6 wire, 22 AWG, shld.
cable.
Ref: Belden 8777

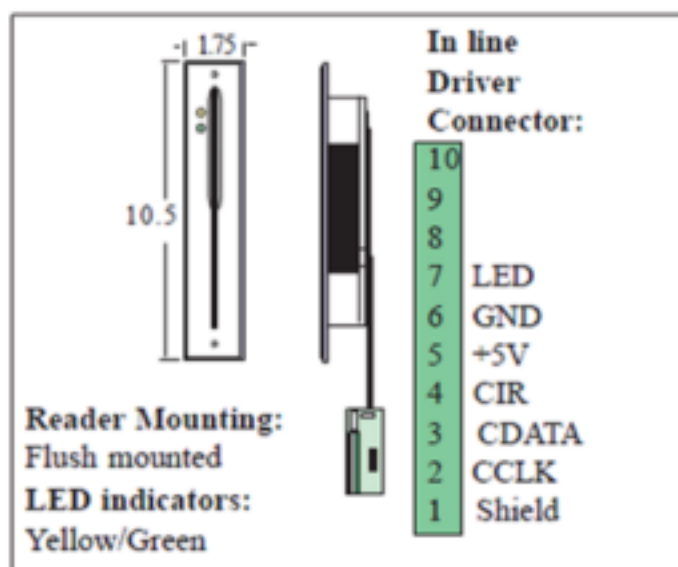

Temperature: -22deg. to +150deg. F
Humidity: 95% non condensing

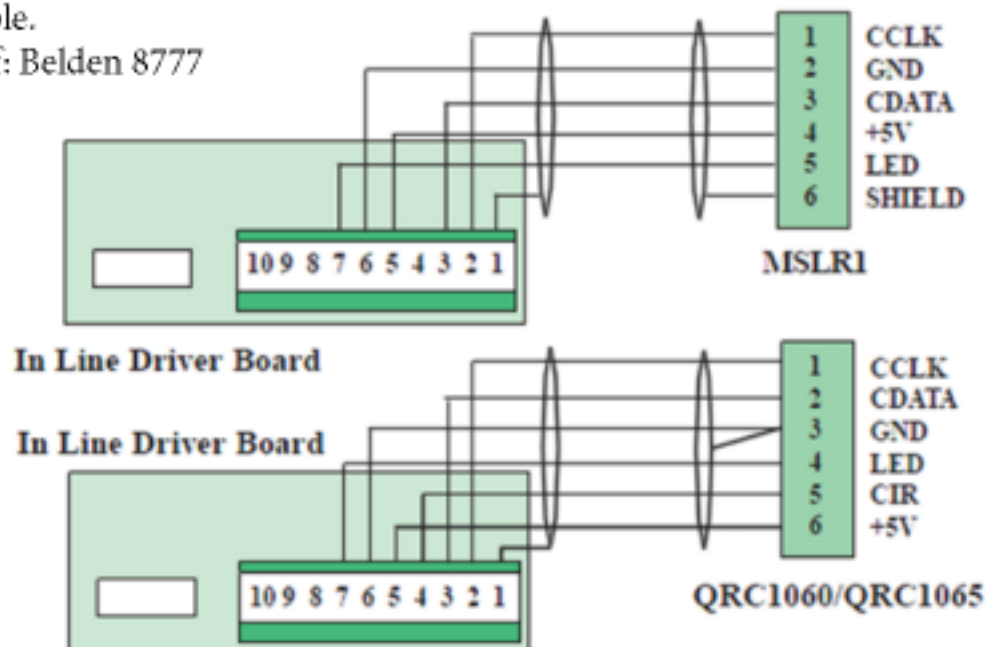

Indoor/Outdoor Swipe Card Reader SR1063SL - SR1063SLEH

SR1063SL / SLEH

Swipe Reader

Mag Stripe

Environmental (SLEH)

Hooded (SLEH)

Indoor (SL)

Surface Mounted

Lighted:

Yellow: Power On

Green: Door Unlocked

Electrical:

5VDC, 30mA

Mechanical:

Weight: 2.7 lbs.



Color: Silver

Interface:

Cable distance 750ft.

6 wire, 22 AWG, shld. cable.

Ref: Belden 8777

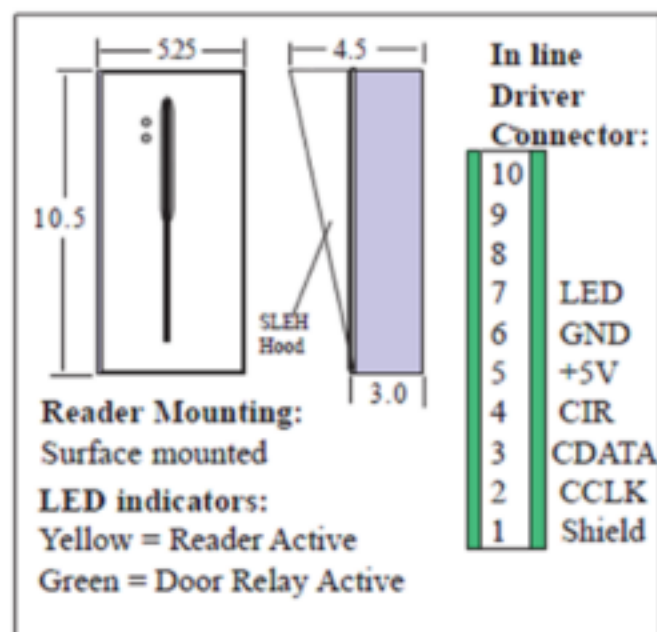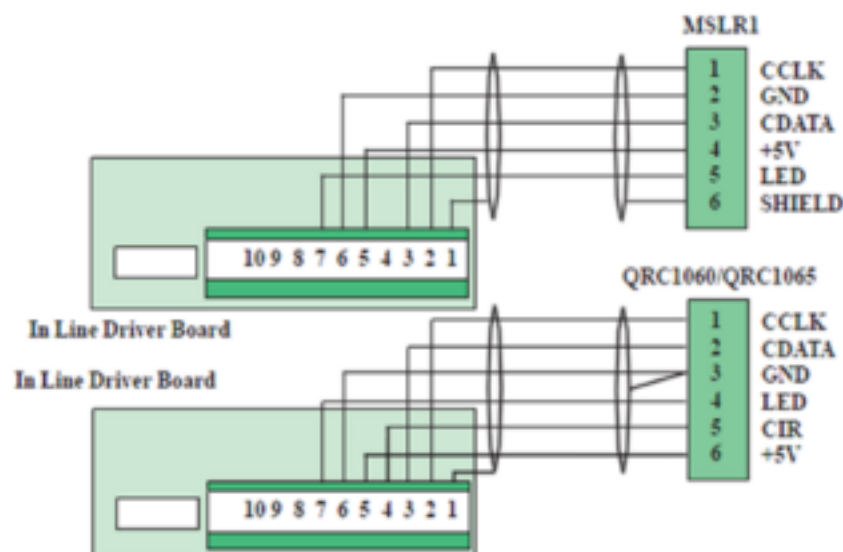

HID - Wiegand Key Reader - WKR-1057FL

Reader Specs:

Indoor/Outdoor
Weather resistant
Wiegand Key Reader

Electrical:

Voltage +5 to +12VDC
Supply Current 30mA.
Output Sink Current
48mA.
Output Source Current
5mA.

Mechanical:


Dimensions: 5.3 x 2.3 x 1.7
Mounting:
Flush Mounted

Environmental:

Temperature:
-40deg to +70 deg C.


Wiring:

Max. Distance 500ft. using
22 AWG foil shielded
cable.

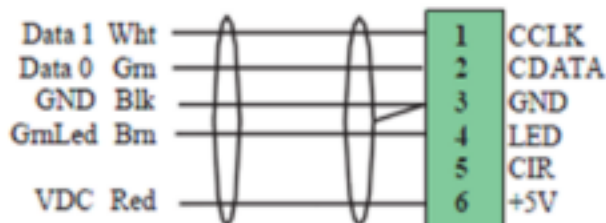


WKR1057FL

QRC1065

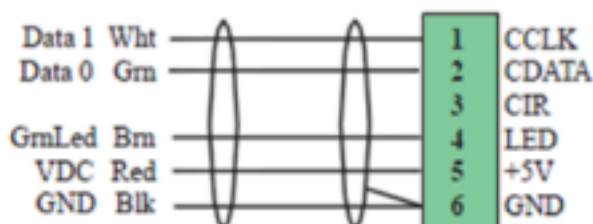

WKR1057FL

DRC-2000/2010/2032

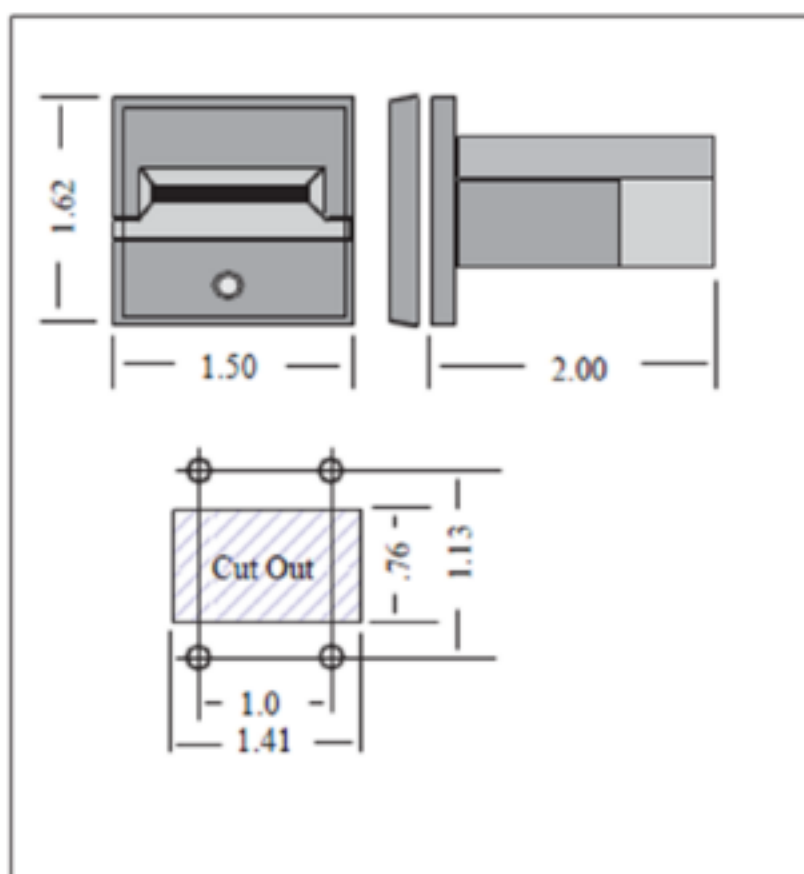



HID - Wiegand Swipe Reader - WSR-1057SL

Reader Specs:

Indoor/Outdoor
Weather proof
Wiegand Swipe Reader

Electrical:

Voltage +5 to +12VDC
Supply Current 30mA.
Output Sink Current
48mA.
Output Source Current
5mA.

Mechanical:

Dimensions: 5.3 x 2.3 x 1.7
Weight: 0.84 lbs.

Environmental:

Temperature:
-40deg to +70 deg C.

Wiring:

Max. Distance 500ft.
using 22 AWG foil
shielded cable.
Ref: Belden 8777

