



HOW TO APPLY & REMOVE THE SUR-SEAL FE-3™


APPLY

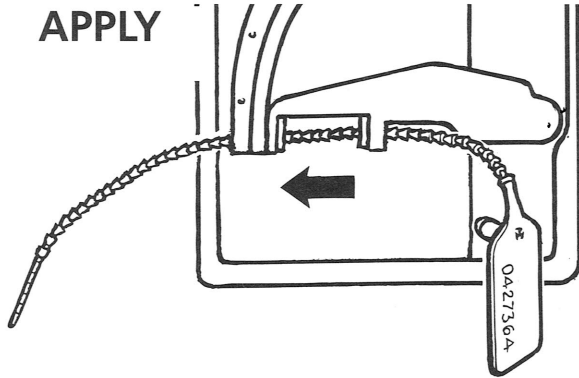

1. Pass bail through both locking slots.

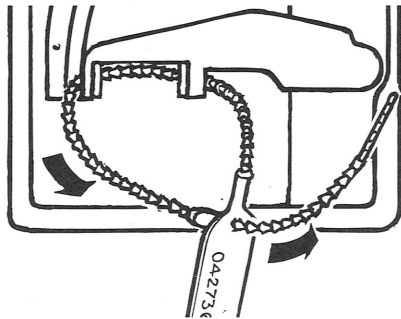


2. Insert and push the bail tip through the tapered end of locking barrel.

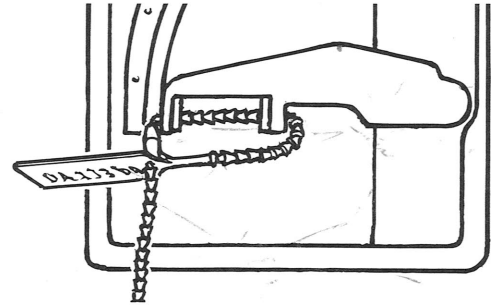

3. Pull bail all the way through until it fits tightly around the locking slots.

REMOVE

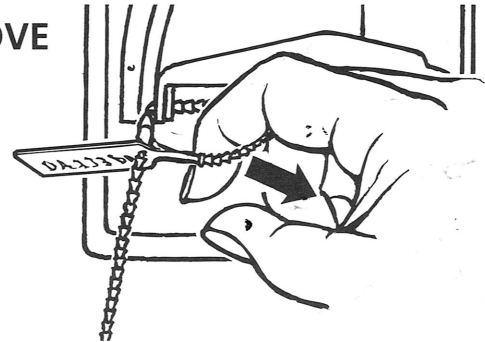

4. Grasp seal by flag and twist until broken