



2.1MP HD IP Bullet Camera with Autofocus and IR

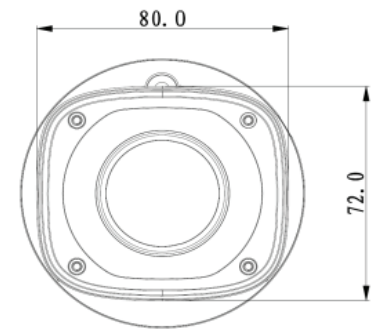


- 1/3" 2 megapixel progressive CMOS
- H.264 & MJPEG dual-stream encoding
- Maximum 25/30fps at 1080P (1920x1080) & 25/30fps at 720P (1280x 720)
- Day/Night (ICR), 3DNR, AWB, AGC, BLC, WDR (120dB)
- Multiple network monitoring: Web viewer, STORM VMS
- 2.7-12mm autofocus lens
- Maximum length of IR LEDs: 30m
- IP66, PoE (802.3af)
- Outdoor / Indoor

Dimensions (mm)

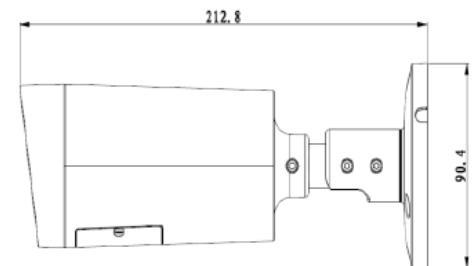

Popular Mounting Solutions

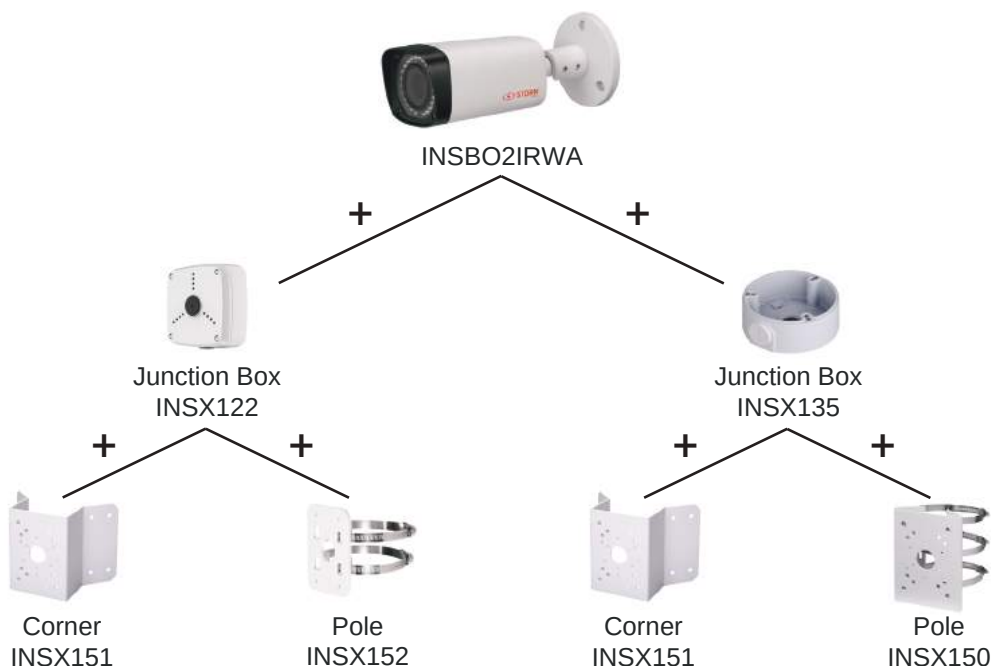

INSBO2IRWA

Product Specifications



Camera		
Image Sensor		1/3" 2 megapixel progressive scan Aptina CMOS
Effective Pixels		1920(H) x 1080(V)
Scanning System		Progressive
Electronic Shutter Speed		Auto / Manual, 1/3(4)~1/10000s
Minimum Illumination		0. 01 Lux/F1.4 (Color), 0 Lux/F1.4 (IR on)
S/N Ratio		More than 50dB
Video Output		N/A
Camera Features		
Maximum Length of IR LEDs		30m
Day/Night		Auto (ICR) / Color / B/W
Backlight Compensation		BLC / HLC / WDR
White Balance		Auto / Manual
Gain Control		Auto / Manual
Noise Reduction		3D
Privacy Masking		Up to 4 areas
Lens		
Focal Length		2.7mm-12mm autofocus
Maximum Aperture		F1.4
Focus Control		Auto
Viewing Angle		H: 78°- 28°
Lens Type		Motorized / Fixed Iris
Mount Type		Board -in Type
Video		
Compression		H.264 / H.264H / MJPEG
Resolution		1080P (1920x1080) / 1.3MP (1280x960) / 720P (1280x720) / D1 (704x576 / 704x480) / CIF (352x288 / 352x240)
Frame Rate	Main Stream	1080P (1 - 25/30fps)
	Sub Stream	D1/CIF (1 - 25/30fps)
Bit Rate		H.264 H: 40 - 8192 Kbps
Audio		
Compression		N/A
Interface		N/A
Network		
Ethernet		RJ-45 (10/100Base -T)
Wi-Fi		N/A
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
Compatibility		ONVIF, CGI, PSIA
Maximum User Access		20 users

INSBO2IRWA

Product Specifications



Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	Micro SD, Maximum 64GB
RS485	N/A
Alarm	N/A
PIR Sensor Range	N/A
General	
Power Supply	DC12V /PoE (802.3af)
Power Consumption	Maximum 7.5W
Working Environment	-30°C to +60°C, Less than 95% RH
Ingress Protection	IP66
Vandal Resistance	N/A
Dimensions	72mm × 80mm × 212.8mm
Weight	0.65 kg