



TECHNICAL SPECIFICATION:

HDoCS™ Bullet Camera	CT-2M-B21
Resolution	1080p over Coax
Image Sensor	1/3" CMOS
Day/Night Functionality	Yes w/ICR
Lens Type	2.8 ~ 12mm VF Lens
Angle of View	81°(W) ~ 23°(T)
IR LEDs	42
IR LEDs Distance	Up to 150ft.
Electronic Shutter	1/30 ~ 1/6000 Sec
Minimum Illumination	1.0 Lux (Color), 0.001 Lux (IR LEDs On)
Service Monitor Output	1.0 Vp-p Composite, 75 ohm
General Information	CT-2M-B21
Operating Temperature	-20 °F ~ 122 °F
Operating Humidity	Within 80% RH
Power Consumption	14W / 1 Amp (LEDs On), 8W / 500mA (Camera Only)
Input Voltage	12VDC / 24VAC Dual Voltage

*Specifications are subject to change without any prior notice.

KEY FEATURES:

- 1/3" CMOS Sensor
- 1080p, HD-TVI
- 2.8~12mm, VF Lens
- Day/Night(ICR)
- 42 IR LEDs
- IR Illumination - up to 150ft.
- OSD Setup Menu
- DWDR / DSS / 3DNR
- DC12V / AC24V
- Service Monitor Out (Analog)

CONSTRUCTION:

- Service Monitor Output - SD Analog(CVBS)
- External Lens Adjustments
- Outdoor / Metal Housing


MOUNTING ACCESSORIES:

- CB-JB2 / Junction Box
- EA-JB200 / Junction Box

APPLICABLE PRODUCTS:

- DT-E400 / 4-ch HD-TVI DVR
- DT-E800 / 8-ch HD-TVI DVR
- DT-E1600 / 16-ch HD-TVI DVR
- DT-P1600 / 16-ch HD-TVI DVR
- DT-P1600 / D

DIMENSIONS (INCH:MM):

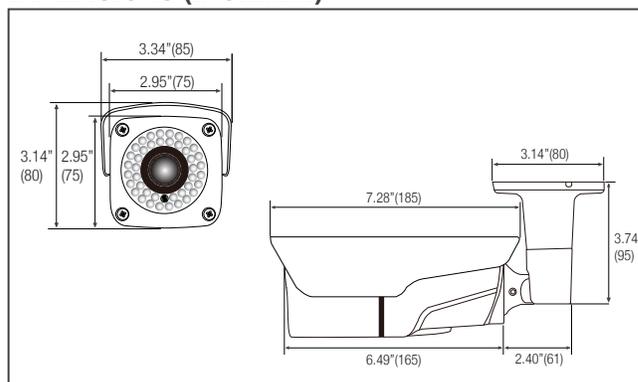

ACCESSORIES:

