

WatchNET®

Integrated Digital Technologies



XDD III

XTREME DIGITAL DYNAMICS

NEW
High Resolution
960H
700TVL



XDD-III-BIMR / XDD-III-BILR




LONG RANGE
IR BULLET CAMERA


Features:

- ❖ XDD III weather proof bullet is newest in technology advancement, True Day / Night Capability
- ❖ Low light DNR and unique **SENSEFIER III** technology brightens night images without IR illuminator
- ❖ 3 Optional mounts with sealed IP66 Housing allows this camera to function in the most adverse weather conditions
- ❖ Varifocal lens with IR cut filter coupled with 3 DNR and **SENSEFIER III** technology, gives crisp clear picture in candle light condition
- ❖ Flexible OSD function gives the camera adjustable menu functions to suite indoor / outdoor applications


Optional Mounting Accessories






Junction Box



Pole Mount



Corner Mount

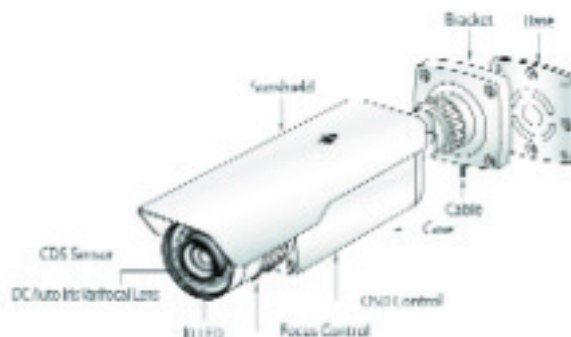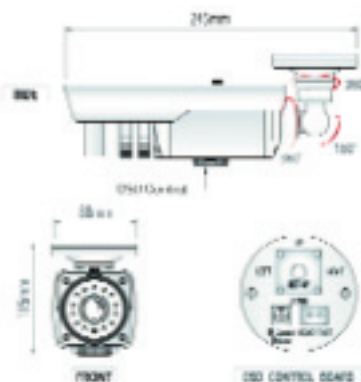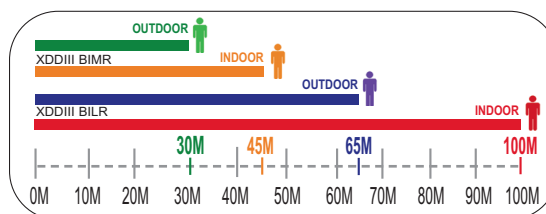

DC Auto Iris with Varifocal IR Cuter
Lens 3.5mm ~ 16mm (Model BIMR)
Lens 5mm ~ 50mm (Model BILR)





1. Normal

2. D-WDR ON

1. Normal IR

2. Smart IR

SPECIFICATIONS	XDD III-BIMR / XDD III-BILR	
Sensor	1/3" Sony Super HAD II CCD	
Total Pixels	NTSC=1020(H)x508(V) / PAL=1020(H)x596(V)	
Effective Pixels	NTSC=976(H)x494(V) / PAL=976(H)x582(V)	
Scanning System	2:1 Interlace	
Synchronization	Internal / Line Lock	
O.S.D.	Full function menu	
Dynamic Range	52dB (*128) or less	
Range	50ft	100ft
Backlight	BLC / HSBLC / Off Selectable	
Resolution	New 960H 700 TVL	
S/N (Y signal)	52dB (AGC Off, Weight On)	
Min. Illumination	0.00001 LUX / 0.000006 Lux(IR LED ON)	
Lens	3.5mm ~ 16mm Varifocal Auto Iris with IR Cuter	5mm ~ 50mm Varifocal Auto Iris with IR Cuter
White Balance	ATW/AWB/Indoor/Outdoor/Manual/AWC	
Electronic Shutter Speed	AUTO / (1/50SEC, 1/60SEC~ 1/100,000SEC)	
SENSEIFIER III	Auto/Fixed/Off (Selectable Limit*2~*258)	
Gain Control	High/Middle/Low/Off Selectable	
DNR	Off/On (1 ~ 50 Level Adjustable)	
D-WDR	Indoor/Outdoor/Off	
Motion Detection	On/Off (4 Zone, Alarm Output)	
Privacy	On/Off (8 Zone)	
Mirror	Off/Mirror/V-Rev/Rotate	
Freeze	On / Off	
Sharpness	0 ~ 31 (Level Adjustable)	
D&N Selection	Color/Auto/Ext/BW	
Digital Zoom	On (*32) / Off	
Blemish Compensation	Auto:128 Point	
Power	Dual Voltage (AC24 / DC12V)	
Power Consumption	IR LED ON:500mA Max	IR LED ON:500mA Max
Storage Temp./Humid.	-35°C ~ +60°C / -31°F ~ +140°F RH 95% Max	
Dimension	88mm(W) * 115mm(H) * 245mm(D) 3.46"(W) x 4.5"(H) x 9.64"(D)	88mm(W) * 115mm(H) * 275mm(D) 3.46"(W) x 4.5"(H) x 10.82"(D)
Weight	1600g / 3.52lb	1800g / 3.96lb

All logos & trade marks represent the registered users only. All rights reserved.
All product specifications on this brochure are subject to change without notice.

CANADA:
351 Ferrier Street, Unit 5
Markham, ON L3R 5Z2
Toll Free: 1-866-843-6865
Tel: 416-410-6865
Fax: 1-866-331-3341

USA:
171 Cooper Ave. Suite 110
Tonawanda, NY 14150 USA
Toll Free: 1-855-404-3193
Local: 1-716-877-7277
Fax: 1-866-331-3341

info@watchnetinc.com
www.watchnetinc.com

INDIA:
RZ- 2, Ground Floor
Kapashera
Opp Kapashera Police Station
New Delhi-110037
Tel/Fax: +91 11 26816005

UAE:
PO Box No 126312
Office Suite 703
Oxford Towers
Business Bay, Dubai, UAE
Tel: + 971 4 2767117