

CE-CC119 True D/N Box Camera




INFO:

- » 1/3" SONY 1.3 Megapixel CMOS Exmor
- » 1000 TVL Resolution
- » Back-Focus Lens Adjustment
- » S7 Digital Signal Processor (DSP)
- » OSD Menu Control via Built-in Button Pad or optional CE-REMOTE / CE-REMOTE-UTC
- » DC12V/AC24V

*Lens Sold Separately

DIMENSIONS:

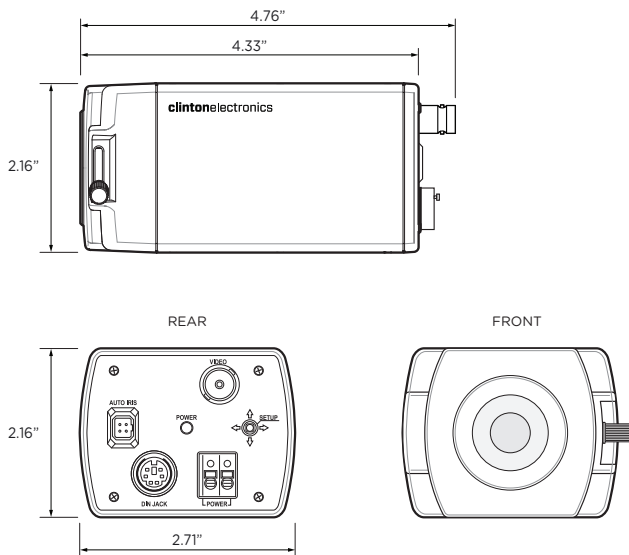

SPECIFICATIONS:

Camera	
Image Sensor	1/3" SONY 1.3 Megapixel CMOS Exmor Sensor
Resolution	1,000 TVL
Effective Pixels	1305 (H) x 1049 (V), 1.37M Pixels
Scanning System	Progressive
S/N Ratio	52dB
Sync System	Internal
Minimum Illumination	0.00001 Lux (Sens-Up x64)
Shutter Speed	1/60 - 1/60,000 sec.
Dynamic Range	N/A
Lens Mount	CS Mount or C Mount w/ adapter
Video Output	1.0 Vp-p, 75Ω
Frequency	Horizontal: 15.734 KHz, Vertical: 59.94 Hz
Power Consumption	Max. 130mA (DC12V), Max. 80mA (AC24V)
Power Requirement	DC12V / AC24V
Operating Temperature	14°F - 122°F / -28°C - 50°C
Operating Humidity	90% RH max
Weather Rating	N/A
IR LEDs	N/A
Heaters/Fan	N/A
Materials	Aluminum
Dimensions (w/ out Lens)	2.71" (W) x 2.16" (H) x 4.33" (D) 69mm (W) x 55mm (H) x 110mm (D)
Weight (w/ out Lens)	.75 lbs / 340.19g

OSD	
DSP Type	S7
Menu Control	OSD Menu Control via Built-In Joystick or CE-REMOTE
Exposure	Brightness, Shutter, AGC
Sens-Up	Yes (x2 - x64)
White Balance	ATW, AWB, AWC-Set, Manual
Digital Dynamic Range	Yes
Backlight Control	BLC, HLC, WDR
Day/Night	Auto, Color, B&W, External
Noise Reduction	3DNR
Camera Title/ID	N/A
Sync	N/A
Monitor	View Angle (4:3 / 16:9)
Motion Detection	(Intelligent) 4 Zones
Privacy Masking	15 Zones
Digital Image Stabilization	N/A
Dead Pixel Control	N/A
Digital Effects	Digital Zoom, D-WDR, Defog, Image Flip
Languages	English, Chinese, Japanese, Korean
Other	Sharpness, Gamma, Pedestal, Color Gain

ACCESSORIES	
H13	Outdoor Box Camera Housing (IP66 Weather Rated)
H02	Soffit Mount Bracket for H13 Housing
D10WBZ	10" Indoor Dome Housing
B15	Box Camera Bracket
203X	Box Camera Bracket
B07	Box Camera Bracket

CERTIFICATIONS:

