


D970 Indoor D/N UTP Dome Camera



INFO:

- 1/3" SONY CCD (Super HAD)
- 580 TVL Resolution
- 2.8-10.5mm (F1.2) Tamron Lens
- S4 Digital Signal Processor (DSP)
- UTP Video Connection
- Includes Video Balun
- OSD Menu Control via Built-in Joystick or CE-REMOTE
- 3 Axis Adjustment
- Mounting Plate
- DC12V/AC24V
- UL Listed

DIMENSIONS:

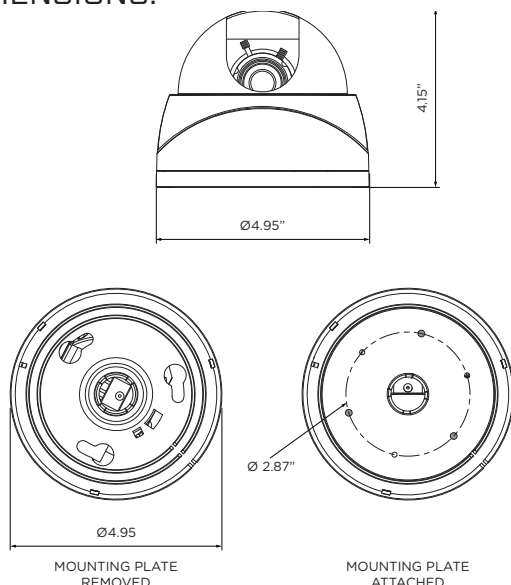

SPECIFICATIONS:

Camera	
Image Sensor	1/3" SONY CCD (Super HAD)
Resolution	580 TVL
Effective Pixels	768 (H) x 494 (V)
Scanning System	2:1 Interlace
S/N Ratio	52dB (AGC Off, Weight On)
Sync System	Internal / Line Lock
Minimum Illumination	0.15 Lux (Color), 0.001 Lux w/ Sense-Up x256
Shutter Speed	1/60 - 1/100,000 sec
Dynamic Range	N/A
Lens	2.8-10.5mm (F1.2) Tamron Lens
Video Output	1.0 Vp-p, 75Ω
Frequency	Horizontal: 15.734 KHz, Vertical: 59.94 Hz
Power Consumption	Max. 200mA (DC12V), Max. 90mA (AC24V)
Power Requirement	DC12V/AC24V
Operating Temperature	32°F - 113°F / 0°C - 45°C
Operating Humidity	90% RH max
Weather Rating	N/A
IR LEDs	N/A
Heaters/Fan	N/A
Materials	Plastic Case w/Polycarbonate Dome
Dimensions	4.95" (Dia.) x 4.15" (H) / 125.73mm (Dia.) x 105.4mm(H)
Weight	1.53 lbs / 693.99g

OSD	
DSP Type	S4
Menu Control	OSD Menu Control via Built-In Button Pad
Exposure	Shutter, AGC
Sens-Up	Yes
White Balance	ATW, Manual, AWC Set, Outdoor, Indoor
Digital Dynamic Range	N/A
Backlight Control	BLC, HLC
Day/Night	Color, B/W, Auto, External
Noise Reduction	Yes
Camera Title/ID	Yes (Up to 15 Characters)
Sync	Yes
Monitor	N/A
Motion Detection	8 Areas
Privacy Masking	8 Areas
Digital Image Stabilization	Yes
Dead Pixel Control	N/A
Digital Effects	Freeze, Horizontal/Vertical Reverse, D-Zoom
Languages	English, Japanese, Korean, Spanish
Other	Sharpness, Comm Adj

ACCESSORIES	
CE-REMOTE	Plug in OSD remote
ACW	White Indoor Pendant Mount Bracket

CERTIFICATIONS:

