


Analog 600 TVL Resolution Height Strip Cameras




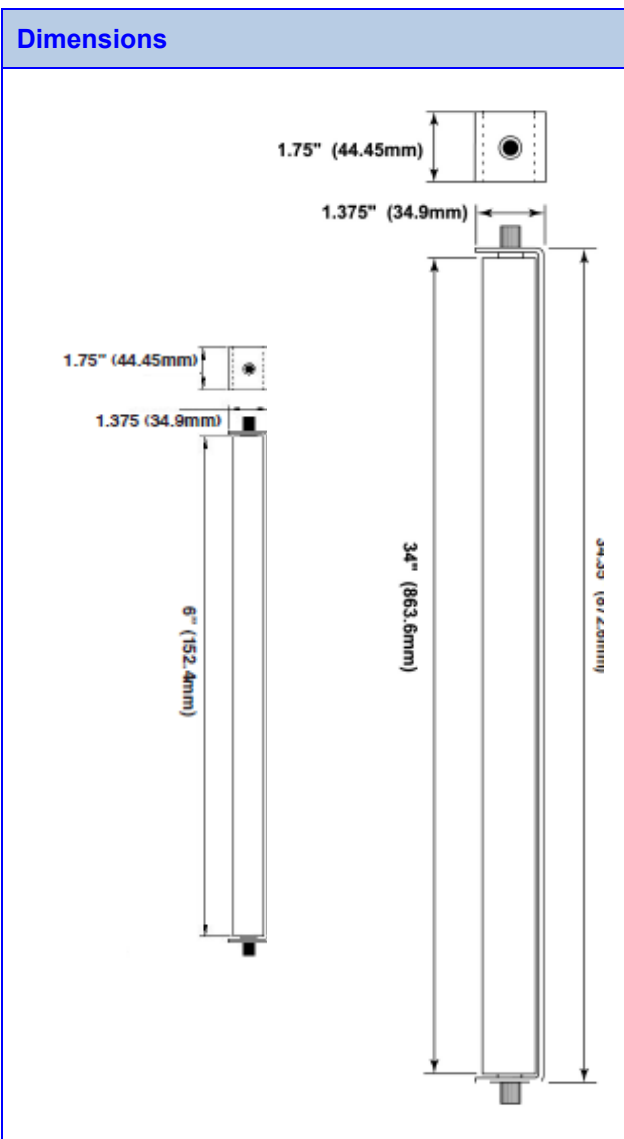
Costar Video's high definition height strip cameras are an ideal choice for retail, banking, convenience stores, fast food, and many other commercial applications. The 600 TV Lines of resolution produces razor sharp images at the perpetrator's eye level. The height strip cameras offer the best solution for facial image capture regardless of ball caps and hoodies. Both the CCC3400PD and CCC3400PX height strip cameras are available in a black or silver chassis to match the door's mullion to blend with the overall building aesthetics. The CCC3400PX can be mounted vertically or horizontally, simply by adjusting the camera's orientation 90°. The easily adjustable gimbal mount allows both height strip cameras to have full coverage to the right and left of double, single and offset doors.

- 600 TV Lines of resolution
- 3.7 mm flat pinhole lens for covert applications
- Capture eyelevel facial images regardless of ball caps or hoods
- Durable anodized aluminum construction
- Available in black or silver chassis to match door mullions
- Adjustable gimbal mount provides left or right coverage for double, single or offset doors
- Limited 3-year warranty
- DC12V power supply included
- *CCC3400PX can be mounted vertically or horizontally with optional customized labels*

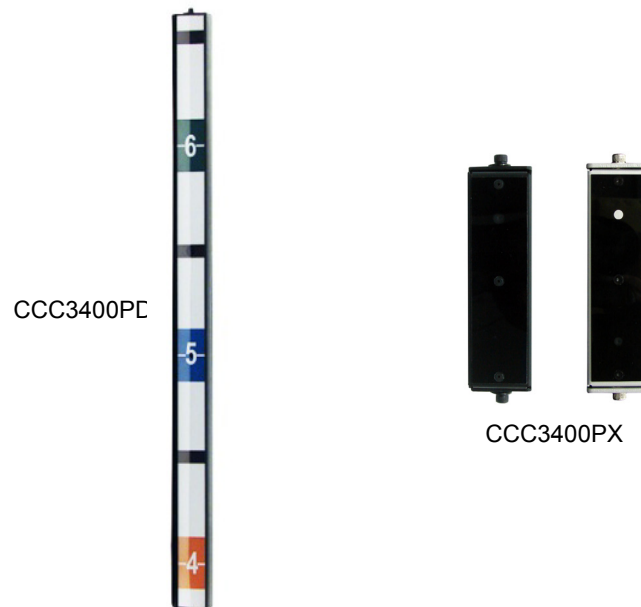

Model	Lens (mm)	Resolution
CCC3400PDB – Black	3.7 mm pin hole	600 TVL
CCC3400PDS – Silver	3.7 mm pin hole	600 TVL
CCC3400PX – Black	3.7 mm pin hole	600 TVL
CCC3400PXS – Silver	3.7 mm pin hole	600 TVL

Power	
Source	DC12V
Consumption	130mA
Sensor and General Information	
Image Sensor	1/3"
Lens	3.7mm flat pin hole lens
Resolution	600 TV Lines
Minimum Illumination	0.1 Lux Color @ F1.2 0.001 Lux BW @ F1.2
Picture Element	510 x 492 (h x v)
Total Pixels	470K
Scanning System	2:1
Electronic Shutter	1/60 ~ 1/100,000 sec.
Video Output	1.0Vp-p / 75Ω
TV System	NTSC
S/N Ratio	>50dB
Digital Noise Reduction	Automatic 2D
Power Input	2-pin screw terminal
Video Output	BNC connector
Lens Mount	Fixed
Certifications	UL, FCC, CE, RoHS
General Operating	
Temperature	-14°F to 122°F (-10°C to 50°C)
Humidity	85% RH Max
Weight (CCC3400PD)	2.8 lbs. (1.26 kg)
Dimensions (w x h x d) (CCC3400PD)	1.75" x 34.35" x 1.375" (44.45 x 872.3 x 34.9 mm)
Weight (CCC3400PX)	0.72 lbs. (0.325 kg)
Dimensions (w x h x d) (CCC3400PX)	1.75" x 6.35" X 1.375" (44.45 x 161.4 x 34.9 mm)
Optional Features	
 <p>Optional labels and HID mini Prox</p>	



Costar
VIDEO SYSTEMS

101 Wrangler, Suite 201 • Coppell, Texas 75019 • Phone: 469-635-6800 • Fax: 469-635-6822 • Toll Free: 1-888-694-STAR (7827)

www.costarvideo.com

Specifications and design are subject to change without notice. Conversions: 1" = 25.4mm Measurement conversions are approximate.