

EZ350

560 TVL Bullet Style Weatherproof Color Camera




Features

- 1/3" Sony Super HAD CCD with low light sensitivity of 0.5 Lux/F=1.2
- Industry leading super high resolution with 560 TVL
- Revolutionary integrated 10-bit Digital Signal Processor (DSP) delivers excellent picture quality and sharp color images
- Intelligent backlight compensation with On/Off switch
- Built-in heater will activate when temperature falls below -10°C / 14°F
- Removable sun shield
- IP66 rated to endure all weather condition

Specifications

Pickup Device	1/3" Sony Interline Transfer Super HAD CCD
Video Format	NTSC or PAL
Picture Format	768 x 494 (NTSC) / 752 x 582 (PAL)
Horizontal Resolution	560 TVL
Video Output	BNC 1.0 Vp-p, 75 ohm
Sensitivity	0.5 Lux/F=1.2
S/N Ratio	Over 48dB (AGC Off)
Electronic Shutter	1/50 (1/60) ~ 1/100,000 sec.
Backlight Comp.	On/Off switch
Auto Gain Control	On/Off switch
Auto White Balance	Yes
Gamma Correction	0.45
Power Source	12VDC / 24VAC
Lens	Vari-focal f=3.8mm~9.5mm/F=1.2 or Vari-focal f=9mm~22mm/F=1.6
Dimensions (L x W x H)	With Sun Shield: 172 x 70 x 82 mm / 6.8" x 3.3" x 2.8" Without Sun Shield: 132 x 57 mm / 5.2" x 2.2" (L x D)
Operating Temperature	-40°C~50°C / -40°F~122°F (20~80% humidity)
Power Consumption	With Heater: 24VAC: 12.5W max. / 12VDC: 7.5W max. Without Heater: 24VAC: 6W max. / 12VDC: 4W max.
Weight	500 g / 1.1 lbs
Weatherproof	IP66 rated
Heater Activation Temp.	-10°C / 14°F

Dimensions

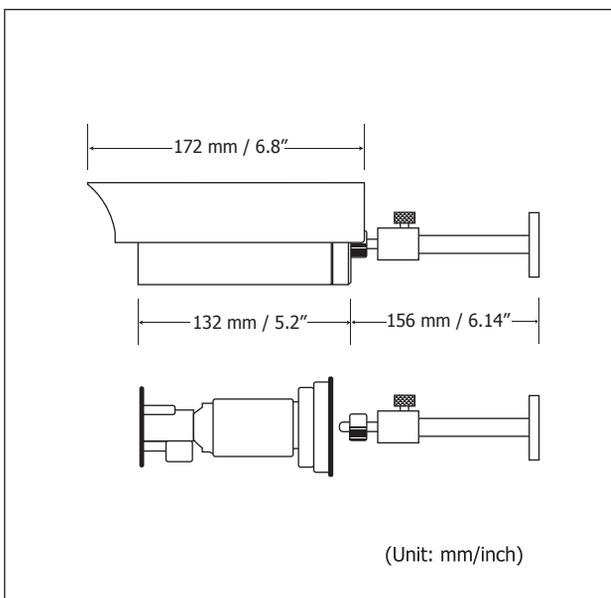

Ordering Information

- **EZ350/N1:** 1/3" 560 TVL, Pure Vision Bullet Style Weatherproof Color Camera, 3.8-9.5mm Lens
- **EZ350/N2:** 1/3" 560 TVL, Pure Vision Bullet Style Weatherproof Color Camera, 9-22mm Lens