


DS-6401HDI High Definition Decoder Server



Key Features

- High performance DSP hardware decompression
- Decoding capability: Up to 1-ch video stream at HD1080p(1920x1080) resolution, 2-ch video streams at HD720p(1280x720) resolution or 4-ch video streams at 4CIF resolution
- HDMI, DVI, VGA and BNC video output

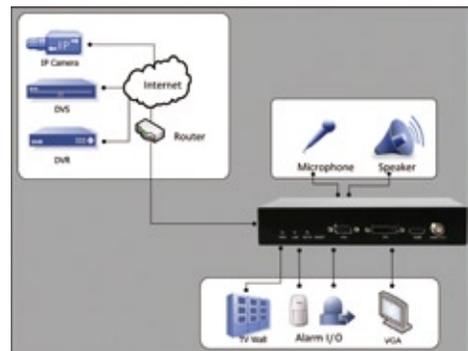

Specifications

		DS-6401HDI
Audio/Video Output	CVBS Output	1-ch BNC output, resolution: PAL: 704×576, NTSC: 704×480
	VGA Output	1-ch VGA output, resolution: 1280×720@60HZ, 1280×1024@60HZ, 1024×768@60HZ
	HDMI Output	1-ch HDMI output, resolution: 1600×1200@60HZ, 1080P(1920×1080)@60HZ, 1080I(1920×1080)@60HZ, 1080P(1920×1080)@50HZ, 1080I(1920×1080)@50HZ, 1280×720@60HZ, 1280×1024@60HZ, 1024×768@60HZ
	DVI Output	1-ch DVI output, resolution: 1600×1200@60HZ, 1080P(1920×1080)@60HZ, 1080I(1920×1080)@60HZ, 1080P(1920×1080)@50HZ, 1080I(1920×1080)@50HZ, 1280×720@60HZ, 1280×1024@60HZ, 1024×768@60HZ
	Audio Output	2-ch, RCA (2.0~2.4Vp-p, 600Ω)
Audio/Video Decoding	Video Standard	H.264
	Video Decoding Resolution	1080P(1920×1080), 720P(1280×720), UXGA(1600×1200), SVGA(800×600), VGA(640×480)
	Video Decoding Channels	1-ch at 1080P(1920×1080P)/2-ch at 720P(1280×720P)/4-ch at 4CIF resolution
	Multi-division Display Mode	1/2/4
	Frame Rate	PAL: 1/16~25fps, NTSC: 1/16~30fps
External Interface	Audio Compression	OggVorbis
	Network Interface	1RJ45 10/100/1000Mbps self-adaptive Ethernet interface
	Serial Interface	1 RS485 and 1 RS232 serial interface
	Voice Talk	1-ch, RCA (2.0~2.4Vp-p, 1000Ω)
	Alarm In	4
Others	Alarm Out	2
	Power Supply	12V DC
	Power Consumption	≤12W
	Working Temperature	-10°C~+55°C(14°F~131°F)
	Working Humidity	10%~90%
Dimension	198(W)×123(D)×39mm(H) (7.80"(W)×4.84"(H)×1.54"(D))	
Weight(without HDD)	≤1500g(3.31lbs)	