

security labs

SLC-177 22X Optical Speed Dome Camera

- Pan speed: 120°/second; Tilt speed: 0-90°/second
- Rotation range: 360° (unlimited)
- Upper casing constructed of high-intensity flame retardant ABS
- Acrylic optical dome housing
- Heater automatically turns on at 32°F, off at 50°F
- Fan automatically turns on 104°F, off at 86°F
- Power: 12VDC (power supply included)
- Dome diameter: 7"
- 100 positions programmable w/ 8 scout groups
- Tour capacity: 2-64 scout positions may be set randomly
- 1-60S programmable tour stay time

CAMERA

- 1/4" Color Sony ExView II™ w/ 600 lines & Effio DSP
- .05 LUX, on screen titling
- Color to B/W (day-night feature for low light)
- Zoom: **22X optical** (3.9mm - 85.8mm)
- Auto/manual focus




SLC-176 27X Optical Zoom Dome Camera

- Pan/Tilt speed: 12°/second
- Rotation range: 0-356° pan, 0-90° tilt
- Upper casing constructed of high-intensity flame retardant ABS
- Acrylic optical dome housing
- Heater automatically turns on at 32°F, off at 50°F
- Fan automatically turns on 104°F, off at 86°F
- Power: 24VAC (power supply included)
- Dome diameter: 7"

CAMERA

- 1/4" Super HAD CCD, 480 lines, .3 LUX
- Color to B/W (day-night feature for low light)
- Zoom: **27X optical** (3.6mm - 97.2mm)
- Auto electronic shutter and white balance
- Backlight compensation

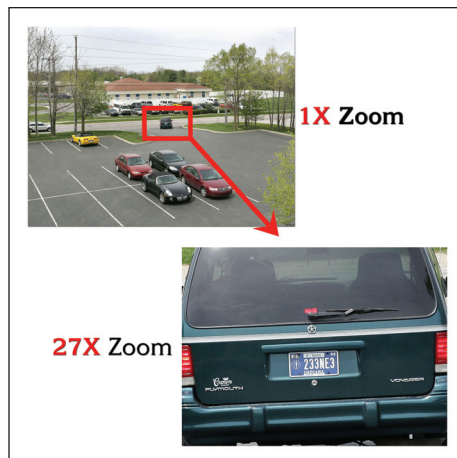

Dome cameras include: 100' CAT 5 cable, (2) UTP video balun transformers, power supply, (1) ceiling mounting bracket, (1) wall mounting bracket, and mounting hardware.