


Leading the Way in Megapixel Video™

# MicroDome® Series Accessories

Accessories for MicroDome and MicroDome G2 Indoor/Outdoor Ceiling and Wall Mounting Solutions


### **Ceiling Mount Configuration**

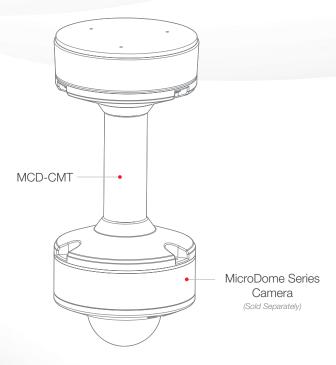


### **Wall Mount Configuration**



### **Electrical Box Configuration**



### **Electrical Box Adapter Configuration**



### **Model Compatibility**

1.2 Megapixel	1.3 Megapixel	1080p	1080p WDR	3 Megapixel	3 Megapixel WDR	5 Megapixel
AV1555DN-S	AV1455DN-S	AV2555DN-S	AV2556DN-S	AV3555DN-S	AV3556DN-S	AV5555DN-S
		AV2455DN-S	AV2456DN-S	AV3455DN-S	AV3456DN-S	AV5455DN-S



# MCD-CMT

Pendant Mount



### Features:

- Easy Installation and Superior Design
- Heavy Duty Enclosure Protection for Applications in Harsh Environments
- · Die-Cast Aluminum is Resistant to Impact and Salt Damage

Compatibility


Compatible with 1/2" NPT standard	
Works with MicroDome Series surface mount domes (	-S)

Environmental

<b>Enclosure Protection</b>	IP66 weather proof standard		
Protection Grade	Impact resistant, IK-10 rated		

Mechanical

Casing Material	Aluminum		
Color	Ivory (Pantone® Cool Gray 1C)		
Dimensions	See Dimensional Drawings Below		
Weight	w/o Camera	0.46lbs (0.21kg)	



# MCD-WMT

Wall Mount



### Features:

- Easy Installation and Superior Design
- Heavy Duty Enclosure Protection for Applications in Harsh Environments
- · Die-Cast Aluminum is Resistant to Impact and Salt Damage

Compatibility


Compatible with 1/2" NPT standard
Works with MicroDome Series surface mount domes (-S)


Environmental

Enclosure Protection	IP66 weather proof standard		
Protection Grade	Impact resistant, IK-10 rated		

Mechanical

Casing Material	Aluminum		
Color	Ivory (Pantone® Cool Gray 1C)		
Dimensions	See Dimensional Drawings Below		
Weight	w/o Camera	0.54lbs (0.25kg)	









# MCD-4S

Electrical Box Surface Mount Cover



### Features:


- · Easily Install a MicroDome Surface Model Inside an Electrical Box
- · Heavy Duty Enclosure Protection for Applications in Harsh Environments
- · Die-Cast Aluminum is Resistant to Impact and Salt Damage


### Compatibility


Works with MicroDome Series surface mount domes (-S models only) in conjunction with a 3rd party 4-inch square box 2-1/8 inch deep.

### Mechanical

Casing Material	Aluminum		
Color	Ivory (Pantone® Cool Gray 1C)		
Dimensions	4.13" L (105mm) x 4.13" W (105mm) x 1.5" H (38mm		
Weight	w/o Camera	0.18lbs (0.08kg)	







### Quick Installation:

Attach the MCD-4S Mount Cover to a 4-inch square box (user supplied) with the supplied hardware.

# © 2016 Arecont Vision®. All rights reserved. Arecont Vision, the Arecont Vision logo, and MegaBall, MegaDome, and MicroDome are registered trademarks of the company.

## **AV-EBA**

### Electrical Box Adapter



### Features:

- · Easy Installation and Superior Design
- · Heavy Duty Enclosure Protection for Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage


### Compatibility

Compatible with 3/4" NPT standa	ard		
Compatible with the following:			
	_		

Description
Junction Box Adapter
Indoor/Outdoor 4" IP66, IK-10 Surface Mount Dome
Wall Mount for HSG2 Housing
Junction Box Adapter for Bell Mount
All-in-One Indoor Cameras with 3.3-10mm Vari-Focal Lens. Not compatible with AV-SPMJB or AV-SWMJB.
All-in-One Indoor/Outdoor Dome Solution with Remote Focus/Zoom option
All-in-One Ultra Low Profile Day/Night Indoor or Indoor/Outdoor Surface Mount Dome Cameras

### Mechanical

Casing Material	Aluminum		
Color	Ivory (Pantone® Cool Gray 1C)		
<b>Dimensions</b> 4.7" L (120mm) x 4.7" W (120mm) x 0.15" H (4		x 4.7" W (120mm) x 0.15" H (4mm)	
Weight	w/o Camera	0.3lbs (0.13kg)	



# 0.15"

### Quick Installation:

- 1. Pass cables through the center hole of the adapter plate.
- 2. Attach the adapter plate to the electrical box (sold separately) using the appropriate hardware and mounting holes.
- 3. Attach the compatible part noted above.





