


CE-M27A-B 27" IP Public View Monitor (Black)



INFO:

- Built-In AXIS® M1025 IP Camera
- 2 MP 3.6mm (F2.8) Lens
- 16:9 Aspect Ratio
- Steel Cabinet with Acrylic Front
- SD Card Player for PIP Window (4GB SD Card Included)
- "RECORDING IN PROGRESS" or "WELCOME" Text Overlay in English or Spanish
- Flashing LED Light
- 1 RJ45 Ethernet Port
- 1 BNC Output (Analog)
- DC24V (Power Supply Sold Separately)

DIMENSIONS:

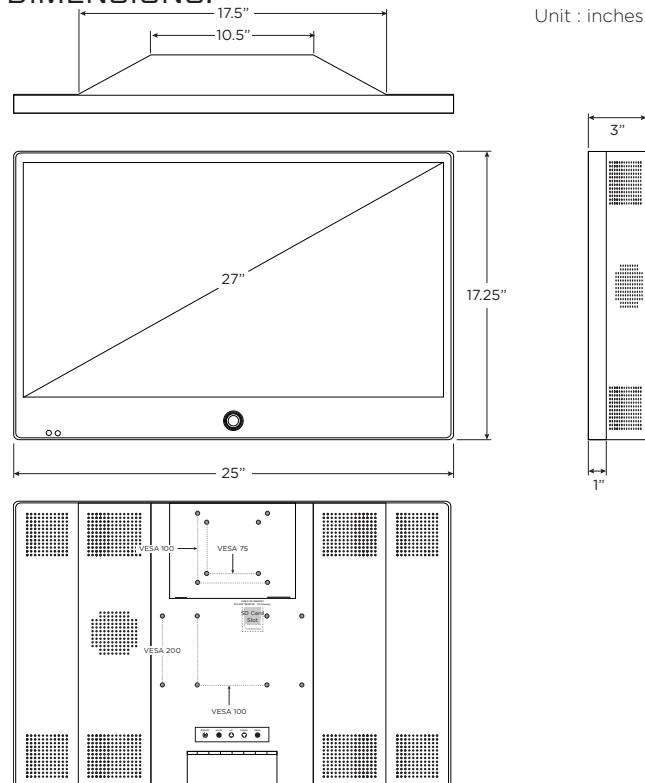

SPECIFICATIONS:

Monitor	
Display	27" LED Backlight LCD
Aspect Ratio	16:9 (True 16:9 Camera Image)
Display Colors	16.7M (8 BIT)
Brightness	300 nit
Contrast Ratio	3000:1
Viewing Angle (H x V)	178° x 178°
Response Time	6.5ms
Mounting	VESA 75, 100 & 100x200
In / Out Impedance	75Ω /Auto Terminating Output
Connections	1 RJ45 Network Output / BNC Output
Power Consumption	45 Watts
Power Requirement	DC24V
Operating Temperature	32°F - 104°F / 0°C - 40°C
Dimensions (W x H x D)	25" x 17.25" x 3" 635mm x 438.15mm x 76.2mm
Weight	18 lbs / 8.16kg

Camera	
Image Sensor	1/2.7" Progressive Scan RGB CMOS
Lens	3.6mm (F2.8) Lens
Minimum Illumination	105 - 100,000 Lux (F2.8)
Shutter Speed	1/6 - 1/8,000 sec.

Video	
Video Compression	H.264 Main Profile (MPEG-4 Part 10/AVC), M-JPEG
Resolution	1920 x 1080 to 320 x 240
Frame Rate H.264	25 FPS w/ power line frequency 50 Hz 30 FPS w/ power line frequency 60 Hz
Frame Rate Motion JPEG	25 FPS w/ power line frequency 50 Hz 30 FPS w/ power line frequency 60 Hz
Video Streaming	Multiple, individually configurable streams in H.264 and Motion JPEG Controllable frame rate and bandwidth, VBR/CBR H.264, MPEG-4 Part 2
Image Settings *controllable through included software	Compression, Color, Brightness, Sharpness, Contrast, White balance, Exposure value, Backlight compensation, Rotation including Corridor Format, Text and image overlay, Privacy mask, Mirroring, Wide Dynamic Range - dynamic contrast

Network	
Security	Password protection, IP address filtering, HTTPSb encryption, IEEE 802.1Xb network access control, Digest authentication, User access log
Supported Protocols	IPv4/v6, HTTP, HTTPSb, SSL/TLSb, QoS Layer 3 DiffServ, FTP, CIFS/SMB, SMTP, Bonjour, UPnP, SNMPv1/v2c/v3 (MIB-II), DNS, DynDNS, NTP, RTSP, RTP, TCP, UDP, IGMP, RTCP, ICMP, DHCP, ARP, SOCKS

System	
Event Actions	File upload: FTP, HTTP, network share and email Notification: email, HTTP and TCP Pre- and post-alarm video buffering Video recording to edge storage
Event Triggers	Intelligent video, Edge storage events
Intelligent Video	Video motion detection, Active tampering alarm, AXIS Camera Application Platform enabling installation of additional applications

CERTIFICATIONS:

