





Features

- 1/3" High Sensitivity CCD
- High Resolution : 550TV Lines
- DC Iris varifocal lens (f=3.8~9.5m F1.2)
- **Built-in IR LED (34EA) & Sensor(1EA)**
- Day&Night (ICR)
- **Super Digital Noise Reduction (SDNR)**
- Electronic sensitivity-up (DSS)
- Auto White Balance
- AGC/BLC/Flickerless (On/Off)
- Min. Illumination : Day(0.3Lux), Night(0.000Lux, IR LED On)
- 24VAC/12VDC Dual Voltage
- Weather-proof Housing
- Built in Fan/Heater



DIMENSIONS

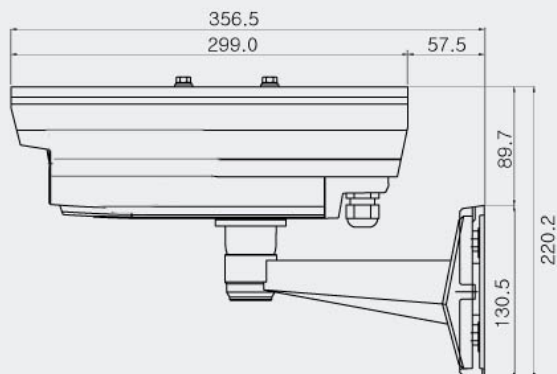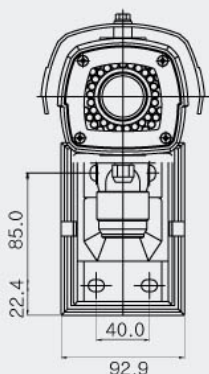

SPECIFICATIONS

Model	BE5815NVR
Signal System	NTSC
Scanning System	2:1 Interlace
Scanning Frequency (H)	15.734 KHz
Scanning Frequency (V)	59.94 Hz
Image Sensor	1/3" High Sensitivity CCD
Total Pixels	811(H) x 508(V) 410K
Total / Effective Pixels	768(H) x 494(V) 380K
Horizontal Resolution	550 TV Lines
Video Output	1.0V p-p (75Ω, Composite)
S/N Ratio	More than 50dB(AGC Off)
Lens	DC Iris varifocal Lens (f=3.8~9.5mm F1.2)
Digital Zoom Ratio	2x (On/Off)
Min.Illumination	0.3Lux(Color), 0.1Lux(B/W), 0.000Lux (IR LED On)
IR LED and Sensor	IR LED (850nm, 15° , 30° Mixed) 34EA, Sensor 1EA
IR LED Visible Range	Max. 30m(Indoor), 20m(Outdoor)
Day&Night (ICR)	ICR (Sensor Type)
DSS	On/Off (Max. 32FLD)
White Balance	Auto
AGC,BLC, Flickerless	On/Off
IP Rating	IP65
Supplied Voltage	24VAC/12VDC Dual Voltage
Dimensions(WxHxD)	92.9 x 220.2 x 356.5 mm
Weight	Approx. 3.0 kg