

GA4167NF


WDR CAMERA



Features

- 1/3" Double Scan CCD
- High Resolution : 560 TV Lines
- WDR (Wide Dynamic Range)
- TDN(ICR), Digital Slow Shutter 2x~12x
- Min. Illumination : 0.0003Lux (DSS On)
- OSD, Auto White Balance, 16x Digital Zoom
- AGC(Auto), BLC(Zone Selectable)
- Motion Detection , Privacy Zone
- Electronic Sensitivity-up(DSS)
- RS-485(Pelco-D) Interface
- 12VDC/24VAC Dual Voltage

DIMENSIONS

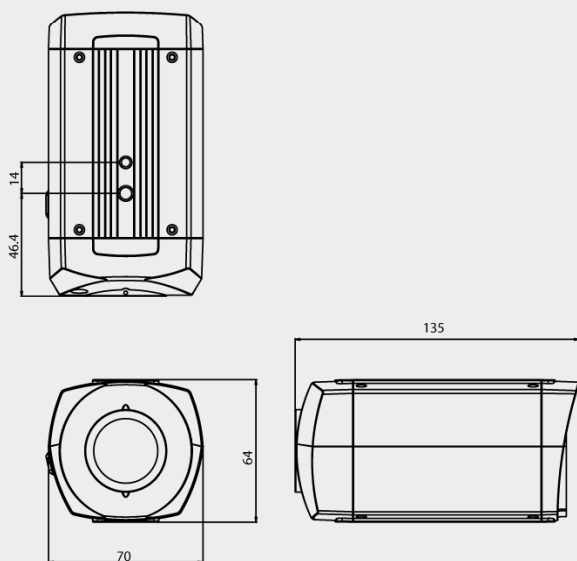

SPECIFICATIONS

Model	GA4167NF
Signal System	NTSC
Scanning System	2:1 Interlace
Scanning Frequency (H)	15.734 KHz
Scanning Frequency (V)	59.94 Hz
Sync System	Internal
Image Sensor	1/3" Double Scan CCD
Total Pixels	811(H) x 508(V) 410K
Effective Pixels	768(H) x 494(V) 380K
Horizontal Resolution	560 TV Lines
Video Output Level	1.0V p-p (75Ω, Composite)
S/N Ratio	More than 50dB (AGC Off)
Lens Mount	C/CS Mount
Lens Selectable	DC, Video, Manual Lens Support
Digital Slow Shutter	Off/2x~1
Day&Night Type	ICR(AGC Type)
Min.Illumination	0.0003 Lux(DSS On, B/W)
WDR (Wide Dynamic Range)	On(0~15, Max. 60dB) /Off
OSD	On/Off
Digital Zoom	16x
AGC, BLC, Flickerless	Auto/Zone Selectable
White Balance	Auto
Motion Detection	6 Zone
Privacy Zone	On/Off (4 Programmable)
Shutter Speed	1/60~1/30,720 sec
Supplied Voltage	12VDC / 24VAC Dual Voltage
Power Consumption	Max. 7.2W / 600mA
Dimensions	70(W) x 64(H) x 135(D) mm
Weight (Net)	Approx. 430g