

MBP-50S / MBP-51S



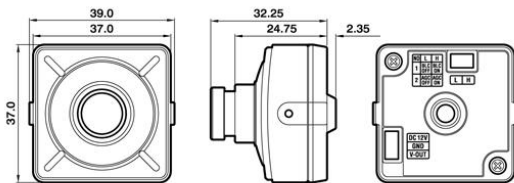

SPECIFICATIONS

	MBP-50S	MBP-51S
Signal System	NTSC	PAL
Scanning System	2:1 Interlace	
Scanning Frequency (H)	15.734 KHz	15.625 KHz
Scanning Frequency (V)	59.94 Hz	50 Hz
Image Sensor	1/3" High Sensitivity CCD (960H)	
Effective Pixels	976(H) x 494(V) 480K	976(H) x 582(V) 570K
Horizontal Resolution	700 TV Lines	
Video Output	1.0V p-p (75Ω, Composite)	
S/N Ratio	More than 52dB (AGC Off)	
Lens	Built-in Fixed Lens (f=3.6mm)	
Min. Illumination	0.05 Lux (Color)	
White Balance	ATW	
AGC	0~20	
Shutter Speed	1/60~1/120,000 Sec.	1/50~1/120,000sec.
Supplied Voltage	DC9V~15V (Recommendation DC12V±0.5V)	
Power Consumption	Max. 1.4W / 120mA	
Dimensions	39(W) x 37(H) x 32.25(D) mm	


FEATURES

- 1/3" High Sensitivity CCD (960H)
- High Resolution : 700 TV Lines
- Built in Fixed Lens (f=3.6mm)
- Min. Illumination : 0.05 Lux
- Auto White Balance
- 12VDC

DIMENSIONS



Fixed Lens



Pin Hole Lens