DATA SHEET

COD. 4660C

POWERCOM SERIES SIMPLEBUS COLOUR KIT
AUDIO/VIDEO UNIT

Simplebus colour system audio-video unit with terminal board complete with camera pin-hole CCD 1/4'' colour adjustable from the front and LED camera illumination. Complete with audio speaker unit with double amplifier, watertight loudspeaker and electret microphone. Both, microphone and loudspeaker volumes, can be adjusted from the front. To be inserted in modules arts. 3321/0, 3321/1 and 3321/2. Dimensions: 102X55X35 mm. From the RI013 it is compatible with all SBTOP functions and products. It allows call addressing for up to 120000 users.

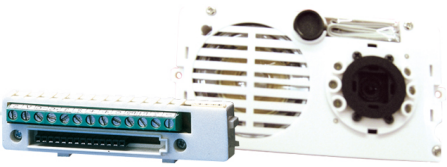

Main specifications

Simplebus Top system:	Yes
Audio system:	No
Audio/video system:	Yes
Type of sensor:	1/4'' CCD
Horizontal resolution (TVL):	350
Maximum current absorption (mA):	300
Microphone volume control:	Yes
Loudspeaker volume control:	Yes
Operating temperature (°C):	-25÷55
Signal/noise ratio (dB):	48
Video output:	1Vpp 75PAL

Software/firmware specifications

Camera pixels (H x V):	500x582

Functions

Key button function:	Yes

General info

Product height (mm):	55
Product width (mm):	102
Product depth (mm):	35
Intrastat code:	85176910
S/N ratio dB:	48

Compatibility

Simplebus Color system:	Yes

The technical specifications are subject to variations without warning

Comelit®
Passion.Technology.Design.

Technical specifications

Sensitivity (lux):	1
Type of camera:	Color

Packaging

Single pack height (mm):	53
Single pack width (mm):	110
Single pack weight (Kg):	0,211
Single pack depth (mm):	94
Single pack volume (dm3):	0,548

The technical specifications are subject to variations without warning

Comelit®
Passion.Technology.Design.