ED910F

1080p Full HD True Day / Night
Indoor Dome Camera
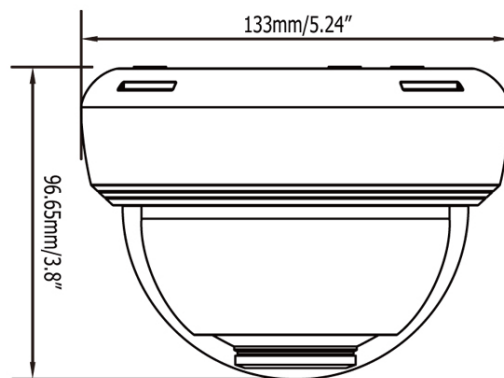
eZ.HD

| Resolution 1080p | True Day/Night | POWER 12VDC/24VAC | 3DNR | Indoor | UTC |
| OSD | D-WDR | 3-Axis | Sens-up | HSBLC/BLC | |

Features

- 1080p Full HD with high flexibility and performance for astounding image
- 1/2.9" Sony 2.24MP CMOS sensor, delivering amazing high sensitivity
- Varifocal 2.8-12mm DC iris lens to capture the desired field of view
- D-WDR to improve the visibility under high contrast scene
- 3D-Noise Reduction ensures less blurry moving subjects, vivid and high SN ratio images even under low light environments
- Supports 1080p, 720p & 960H analog signal output, which can be easily switched using OSD Joystick
- The flexible angle viewing with its 3-Axis rotation design allows wall or ceiling mounting
- Easy lock installation by screwing the base plate to the surface and then locking the camera to the base plate without mounting screws
- eZ Controller function: Control camera OSD settings and PTZ operation directly from DVR end

Dimensions

133mm/5.24"

96.65mm/3.8"

Accessory

BA-ED05

L-Shaped Plastic bracket

Specifications

Model No.	ED910F		
Pickup Device	1/2.9" Sony 2.24MP CMOS	DNR	2DNR / 3DNR, Off
Video Format	NTSC / PAL (Can be switched via OSD)	Defog	Off / Auto
Effective Pixels	1920 (H) x 1080 (V)	D-WDR	On / Off / Auto
Scanning System	Progressive Scan	Sens-up	Off / Auto (x2 ~ x30)
Sensitivity	0.003 Lux (Sens-up x30)	Mirror	Off / Mirror / V-Flip / Rotate
Electronic Shutter	Auto / Manual (x30 ~ 1/50,000) / FLK	Motion Detection	Off / On for 4 selectable zones
Gamma Correction	0.45	Privacy Mask	Off / On for 4 selectable zones
Lens Type	DC Iris 2.8-12mm, F1.4	Environmental	Indoor
BLC	OFF / BLC / HS BLC Selectable	Power Source	12VDC / 24VAC~
AGC	0 ~ 15 Levels	Power Consumption	12VDC: 1.6W max. / 24VAC~: 1.7W max.
White Balance	ATW / AWC-SET / Indoor / Outdoor / Manual / AWB	Operating Temperature	-10°C ~ 50°C / 14°F ~ 122°F
Sync. Mode	Internal	Humidity	Less than 80%
Day / Night	Ext, Auto, Color, B/W	Dimensions	133 x 96.6mm / 5.24" x 3.8"
UTC Function	Supported	Weight	295g / 0.65lb
OSD Languages	English / Simplified Chinese / Traditional Chinese / German / French / Italian / Spanish / Polish / Russian / Portuguese / Netherlands / Turkish	Certifications	CE, FCC, RoHS

EverFocus