

MegaBall® 2 IP Megapixel Cameras

1080p-5MP H.264 All-in-One Motorized P-Iris Lens True Day/Night Indoor IP Cameras with WDR (Wide Dynamic Range) Models or 5MP H.264 All-in-One Manual Panomorph Lens True Day/Night Indoor IP Cameras

Remote Focus/Zoom Models

1080p	1080p WDR	3 Megapixel	3 Megapixel WDR	5 Megapixel
AV2245PM-D	AV2246PM-D	AV3245PM-D	AV3246PM-D	AV5245PM-D
AV2245PM-D-LG	AV2246PM-D-LG	AV3245PM-D-LG	AV3246PM-D-LG	AV5245PM-D-LG
AV2245PM-W	AV2246PM-W	AV3245PM-W	AV3246PM-W	AV5245PM-W

Panomorph Models

5 Megapixel
AV5245DN-01-W
AV5245DN-01-WA
AV5245DN-01-D
AV5245DN-01-DA
AV5245DN-01-D-LG
AV5245DN-01-DA-LG



Optional Manual ImmerVision Enables® Panomorph Lens Available on 5MP Models

* Dome Models can be configured with or without a dome bubble. Light Gray (-LG) housing available for all Dome models.

Stylish MegaBall® 2 multi-megapixel cameras provide ample resolution to zoom-in for details in live or recorded video. These indoor all-in-one solutions integrate a 1080p, 3 or 5-megapixel (MP) camera with fast frame rates and a remote focus/zoom P-iris lens with an adjustable wall mount or flush and surface mount dome housing. On 5MP models, an optional manual lens with an ImmerVision Enables® panomorph system offers 180° and 360° views.

H.264 compression reduces network bandwidth and storage requirements while delivering full frame rates and full resolution without sacrificing image quality. True Day/Night functionality allows for 24-hour surveillance. WDR (Wide Dynamic Range) up to 100dB at full resolution balances light and dark areas in the same scene (1080p and 3MP). Binning mode for increased low light sensitivity is available for 3MP and 5MP cameras.



Integrated Motorized Lens with Remote Focus and Zoom (PM Models)



P-Iris Control for Best Depth of Field and Image Clarity (PM Models)



Panomorph Lens (DN-01 Models)



All-in-One Ball Solution



Integrated Microphone (-A Models)



True Day/Night with IR Cut Filter



Pixel Binning Mode on 3 and 5MP Models



Wide Dynamic Range Available on Some 1080p and 3MP Models



Casino Mode™ Maintains at Least 30fps on AV2245 Models



Dual Encoder H.264/MJPEG

Features:

- Remote Focus/Zoom P-Iris Lens (PM Models)
- P-Iris Control to Get Best Depth of Field and Image Clarity (PM Models)
- Optional True WDR up to 100dB at Full Resolution Available on Some 1080p and 3MP Models: See Clearly in Shaded and Bright Light Conditions Simultaneously
- Integrated Panomorph Solution for 180° and 360° Fields of View (DN-01 Models)
- Light Gray and Black Dome Options
- Casino Mode™ Guarantees Continuous 30fps Frame Rate Required by Gaming Industry Regulations (AV2245 Models)
- Binning Mode for Strong Low Light Performance on 3MP and 5MP Resolutions
- True Day/Night Functionality with Mechanical IR Cut Filter
- Tamper-Resistant Housing
- Integrated Microphone and Audio Out (-A Models Only)
- Installer Friendly Cable Management, 3-Axis Adjustment, In-Ceiling and Surface Mount Dome
- PoE and Auxiliary Power: 12-48V DC/24V AC
- Dual Encoder H.264/MJPEG
- Privacy Mask, Motion Detection, Flexible Cropping, Bit Rate Control, Multi-Streaming and Forensic Zooming
- Fast Frame Rates
- New User-Friendly Web Interface
- Reduced Overall System Cost


Model Specific Features

Model	Resolution	Frame Rate	Features		
AV2245	1080p	31fps	-	Casino Mode™	-
AV2246	1080p	30fps	WDR	-	-
AV3245	3MP	21fps	-	-	Binning
AV3246	3MP	21fps	WDR	-	Binning
AV5245	5MP	14fps	-	-	Binning

Build-to-Order Options

-W	Wall Mount Model
-D	Dome or Recessed Dome Model
-LG	Light Gray Dome
PM	Remote Zoom, Remote Focus, P-iris, True Day/Night
DN-01	Manual Panomorph Lens, True Day/Night
-A	Audio

Create Your Model (Example: AV3246-PM-D-LG)

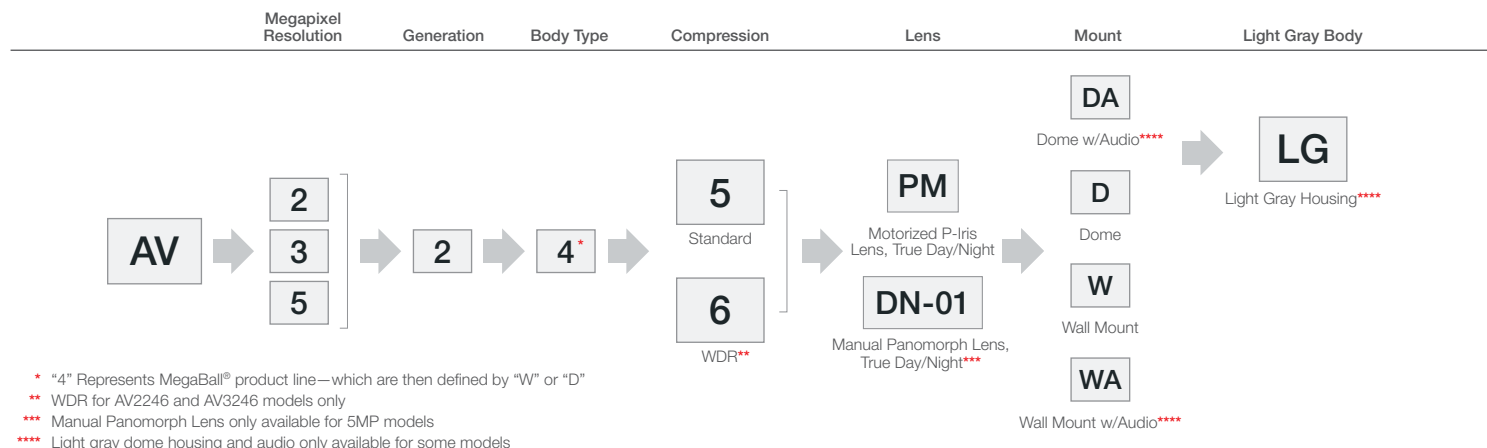

Camera Imaging Specifications

Model		AV2245	AV2246	AV3245	AV3246	AV5245
Image Sensor (CMOS)		1080p	1080p*	3MP*	3MP	5MP
Day/Night		True Day/Night with Automatic Removable IR Cut Filter				
Optical Format		1/2.7"	1/3.2"	1/2.5"	1/3.2"	1/2.5"
Pixel Pitch		3µm	2.2µm	2.2µm	2.2µm	2.2µm
Minimum Illumination	Color (Day Mode)	0.1 Lux	0.3 Lux	0.3 Lux	0.3 Lux	0.3 Lux
	Color Binning (Day Mode)	-	-	0.15 Lux	0.15 Lux	0.15 Lux
	B/W (Night Mode)	0 Lux, IR sensitive	0 Lux, IR sensitive	0 Lux, IR sensitive	0 Lux, IR sensitive	0 Lux, IR sensitive
Full FOV Resolution		1920 H x 1080 V	1920 H x 1080 V	2048 H x 1536 V	2048 H x 1536 V	2592 H x 1944 V
1/4 Resolution		960 H x 540 V	960 H x 540 V	1024 H x 768 V	1024 H x 768 V	1296 H x 972 V
Dynamic Range		69dB	WDR up to 100dB	70.1dB	WDR up to 100dB	70.1dB
Maximum SNR		45dB	49dB	45dB	49dB	45dB
Frame Rates	At Max Resolution	31fps (1920 x 1080)	30fps (1920 x 1080)	21fps (2048 x 1536)	21fps (2048 x 1536)	14fps (2592 x 1944)
	Cropped	42fps (1280 x 1024)	41fps (1280 x 1024)	29fps (1920 x 1080) 41fps (1280 x 1024)	30fps (1920 x 1080) 41fps (1280 x 1024)	21fps (2048 x 1536) 29fps (1920 x 1080) 41fps (1280 x 1024)
	Binning Mode	-	-	46fps (1024 x 768) 64fps (960 x 540)	21fps (1024 x 768) 27fps (800 x 600) 31fps (960 x 540) 32fps (640 x 512)	34fps (1296 x 972) 46fps (1024 x 768) 64fps (960 x 540)
Lens	Motorized Lens	3-10mm, 1/2.7", F1.3 H-FOV = 117°~36°	3-10mm, 1/2.7", F1.3 H-FOV = 81°~26°	3-10mm, 1/2.7", F1.3 H-FOV = 86°~28°	3-10mm, 1/2.7", F1.3 H-FOV = 86°~28°	3.4-10mm, 1/2.5", F1.4 H-FOV = 102°~35°
	Manual Panomorph Immervision Enables® A8TRT Lens	-	-	-	-	0.98mm (Short Axis) 1.12mm (Long Axis) F2.0, H-FOV = 182°
Remote Focus / Remote Zoom / P-Iris		Yes	Yes	Yes	Yes	Yes
IR Corrected		Yes	Yes	Yes	Yes	Yes

* Effective

Data Transmission	Compression Type	H.264 (MPEG-4, Part 10)/Motion JPEG
		21 levels of quality
	Transmission Protocols	RTSP, RTP/TCP, RTP/UDP, HTTP, DHCP, TFTP
	Multi-Streaming	100Base-T Ethernet Network Interface 8 non-identical streams

Programmability	Remote focus, remote zoom and P-iris control (PM models)
	Motion Detection and privacy mask with 1024 detection zones
	Auto adjustment between WDR and LDR modes (WDR models only)
	Programmable shutter speed to help control motion blur
	Pixel Binning Mode (3MP and 5MP)
	Casino Mode™ maintains 30fps (AV2245 model)
	Flexible Cropping (resolution windowing down to 1x1 pixel for JPEG and 2x2 pixels for H.264)
	Low light noise filter control
	Bit rate and bandwidth limitation control
	Backlight compensation and multi-matrix white balance
	50/60Hz selectable flicker control
	Electronic pan, tilt, zoom (PTZ) and image flip 180°
	Programmable resolution, brightness, saturation, gamma, sharpness, tint

Compliance	Industry Standard	ONVIF Profile S and PSIA Conformant
	Listings	UL (CB)
	FCC Compliance	47 CFR 15 Class A
	Environmental	RoHS, REACH, WEEE
	Markings	(CE) EN55022 Class A, EN55024, EN61000-3-2, EN61000-3-3, EN60950


Environmental	Operating temperature	-5°C (-23°F) to +50°C (122°F)
	Humidity	0% to 90% (non-condensing)
	Stable image temperature	0°C (32°F) to +50°C (122°F)
	Storage temperature	-20°C (-4°F) to +60°C (140°F)

General Electrical	Alarm Input	General purpose opto-coupled
	Alarm Output	General purpose opto-coupled (except -A models)
	Power Over Ethernet	PoE 802.3af, Class 2
	Auxiliary Power	12-48V DC, 24V AC
	Max Power Consumption	AV2245PM 5.9 Watts DC Power
		AV3245PM / AV5245PM 6.3 Watts DC Power
		AV2246PM / AV3246PM 6.8 Watts DC Power
		AV5245DN-01 5.7 Watts DC Power

Audio Electrical (-A models only)	Streaming	Two-way
	Compression	G.711 PCM 8 kHz
	Input/Output	Integrated microphone / line output

Mechanical

Casing	-W	Die-cast aluminum 3" metal ball and mount	
	-D	Plastic surface/in-ceiling dome with Acrylic bubble	
Gimbal	Easy 3-axis camera adjustment with 360° pan, 90° tilt and 360° z-axis		
Dimensions	-W	Ø 3" (76.2mm) x 6.15" H (156.2mm)	
	-D (in-ceiling)	Ø 5.1" (130mm) x 1.74" H (44mm)	
	-D (surface mount w/ bubble)	Ø 5.1" (130mm) x 3.85" H (98mm)	
		Camera Unit	Packaged
Weight	-W	1.2lbs (0.54kg)	2.0lbs (0.9kg)
	-D	1.2lbs (0.54kg)	1.9lbs (0.86kg)
Dome Color	-LG	Light Gray Dome	

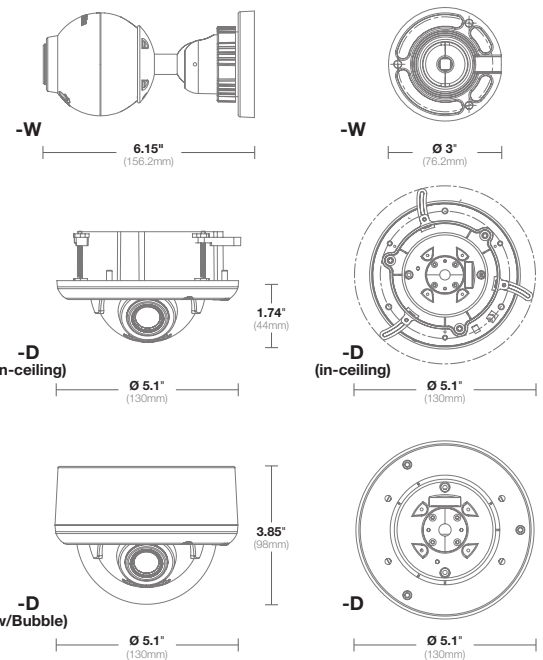

Accessories

D4S-WMT-B	Black wall mount with 3/4" NPT standard
D4S-CMT-B	Black ceiling mount with 3/4" NPT standard
D4S-WMT	Light Gray Wall mount with 3/4" NPT standard
D4S-CMT	Light Gray Ceiling mount with 3/4" NPT standard
SV-EBA	Light Gray Electrical box adapter
SV-JBA	Light Gray Junction box adapter