

### 2 Mega Pixel Network Mini Strip Camera



Height Strip Camera



Conventional Camera

Superior Facial Recognition



#### Description:

The CCI2138PX mini strip camera provides high quality video at the perpetrator's eye level with (1080p) 2.0 mega pixel resolution. The CCI2138PX is available in black or silver chassis to match the door's mullion to blend in with the overall building aesthetics. The mini strip IP camera is an ideal choice for applications such as banking, retail stores and many others. Costar Video's IP cameras are compatible with the iNEX user interface platform. The iNEX user interface incorporates features such as simplified user management, advanced camera mapping and logical camera grouping making it easier to monitor and access each of your cameras. The iNEX user interface also has the ability to integrate both analog and IP camera technology on the same platform allowing you to have a diverse surveillance system. Costar Video's IP cameras are OnVIF supported. The industry standard OnVIF protocol makes it easy to integrate Costar branded IP cameras with OnVIF compatible recorders.

#### Features:

- 2.0 mega pixel resolution (1080p)
- 3.8 mm F2.0 fixed mega pixel lens
- Multiple compression (H.264, MJPEG)
- Motion detection
- Dual IP streaming
- Black or silver to match door mullion
- Durable anodized aluminum construction
- Adjustable gimbal mounted camera provides for double, single or offset doors
- Covert door cameras capture and identify facial images regardless of hats or hoods
- Power over Ethernet (PoE)
- 2.0" x 8.83"



# CCI2138PX Specifications

Model	Description	Resolution
CCI2138PXB	Black	2 Mega Pixel (1080p)
CCI2138PXS	Silver	2 Mega Pixel (1080p)

Power	
Source	PoE
PoE	802.3af
Sensor	
Image Sensor	1/2.8" CMOS Progressive Scan
Lens	3.8 mm F2.0 Fixed Mega Pixel
Minimum Illumination	Color: 1.0 Lux (F1.2)
Resolution	2 MP (1920x1080) HD (1280x720) VGA (640x352) CIF (320x176) QCIF (160x96)
Frame Rate	Up to 30 fps
Video Features	
Compression	H.264, MJPEG
Streaming	Dual Stream
Standards	OnVIF, PSIA
System	
Auto Recovery	Yes
Reset Settings	Soft or Factory Reset
Security	Password Protection Alarm I/O, Audio, PTZ
Firmware Upgrade	HTTP, Telnet or FTP
Supported Protocols	HTTP, RTP/RTSP, ICP/IP, FTP, Telnet, RARP, PPPoE, PAP, CHAP, DHCP, SMTP, client (email), NTP
System	
Maximum Connections	16 (Live)
DVRNS	Yes
Remote Access	iNEX Interactive
General Information	
Temperature	32°F to 122°F (0°C to 50°C)
Humidity	80% RH Max
Approvals	FCC (Class B), CE (Class B), RoHS
Dimensions (w x h)	2.0" x 8.83" (50.8 x 212.9 mm)


## Applications



### iNEX

Connect and manage IP and Analog cameras on a single user interface.

## Dimensions

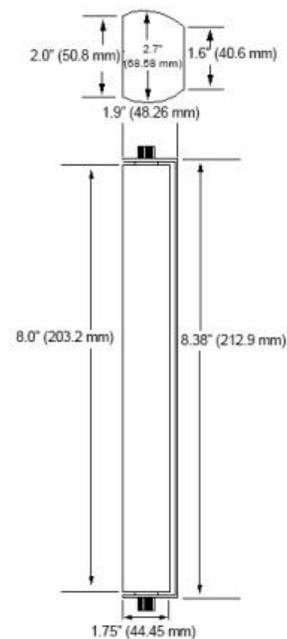

**Costar**  
VIDEO SYSTEMS

101 Wrangler, Suite 201 • Coppell, Texas 75019 • Phone: 469-635-6800 • Fax: 469-635-6822 • Toll Free: 1-888-694-STAR (7827)

[www.costarvideo.com](http://www.costarvideo.com)

Specifications and design are subject to change without notice. Conversions: 1" = 25.4mm Measurement conversions are approximate.