

MEGAPIX
MF21M4TIR

IP 2.1MP Flat Vandal Dome Camera



Full HD



Dual Streaming



Motion Detection



Triplex Encoder



ONVIF



PoE




UPnP



Easy Installation

Full High Definition delivers crystal clear 1080P HD resolution video images at 30 frames per second

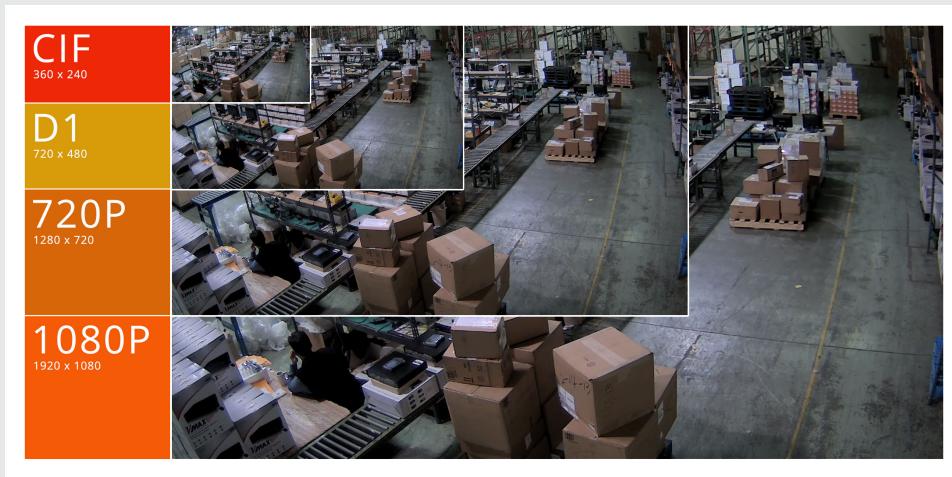

ONVIF (Open Network Video Interface Forum) compliant with ONVIF standards for increased flexibility and reduced total cost

PoE (Power over Ethernet) simplifies installation by connecting both power and network through a single cable



Powerful Electronic Wide Dynamic Range

Enables the camera to capture clear images in the same frame, even when there are both very bright and very dark areas in the same field



Day & Night when light diminishes below a certain level, automatically switches to night mode to provide high quality black-and-white video images





Summary

The MF21M4TIR MEGAPIX camera is a triple codec Flat Vandal Dome network camera that provides 1080P megapixel resolution at 30 frames per second. The camera's advanced technologies such as True Day and Night, 3D-DNR, WDR, and Smart IR will deliver the best images in any type of environment. And Power over Ethernet will simplify installation by connecting both power and network through a single cable.

Features

- ONVIF Compliant, Profile S
- 2.1 Megapixels (1080P, 30fps)
- Triple Codecs with Simultaneous Dual-Stream
- 1/2.8" CMOS Sensor
- 4.0mm Fixed Lens
- 12X Digital Zoom
- 30ft IR with Intelligent Camera Sync
- TDN [True Day and Night]
- Power over Ethernet [PoE] & DC12V
- Micro SD/SDHC Class 10 Card for Emergency Backup [Not Included]
- IP66 Certified [Weatherproof]
- Privacy Masking (16) & Motion Detection
- WDR [Wide Dynamic Range]
- 3D-DNR [3D Digital Noise Reduction]

Accessories (Optional)




DWC-VFZWM
Wall Mount for Flat Vandal and PTZ5x Models



DWC-VFZCM
Ceiling Mount for Flat Vandal and PTZ5x Models

Dimensions (unit : mm)

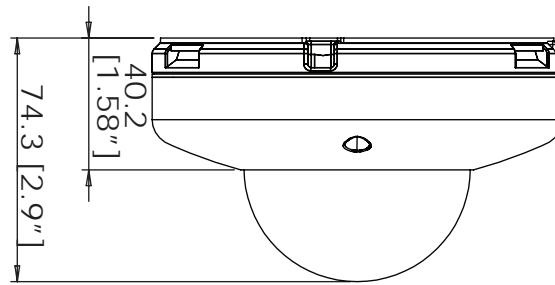

Specifications

IMAGE	
Image Sensor	1/2.8" Sony CMOS Sensor
Total Pixels	2016 (H) X 1108 (V)
Minimum Scene Illumination	F2.5 (30IRE): 0.5 Lux [Color] F2.5 (30IRE): 0.0 Lux [B&W]
LENS	
Focal Length	4.0mm F1.8
Lens Type	Fixed Lens
IR Distance	30ft Range IR
Angle of View	Horizontal: 86°
Digital Zoom	x12
OPERATIONAL	
Brightness	0~20
Shutter Mode	Auto, Manual
Digital Slow Shutter	Off, up to 8x
DNR (Digital Noise Reduction)	Off/ Low/ Middle/ High
Auto Gain Control	Max 41dB
BLC (Back Light Compensation)	Off, On
WDR (Wide Dynamic Range)	Off, Low, Middle, High
Day and Night	Auto, Day (Color), Night (B/W)
Chroma (Hue & Saturation Settings)	0~20
Privacy Zones	Off/ On (16 Privacy Masks)
Sharpness	0~10
Mirror & Flip	Off, On
Record Schedule	Continuous, Motion, Pre- & Post-Alarm
Alarm Notifications	Notifications Via E-mail
NETWORK	
LAN	802.3 Compliance 10/100 LAN
Video Compression Type	H.264, MPEG4, MJPEG (Super Fine~Low)
Resolution	1920X1080 (16:9) ~ 320X240 (4:3)
Frame Rate	Up to 30fps at All Resolutions
Streaming Capability	Dual-Stream at Different Rates and Resolutions
IP	IPv4, IPv6
Protocol	TCP/IP, HTTP, DHCP, PPPoE, ICMP, ARP, RARP, RTSP, NTP, UDP, Multicast
Maximum User Access	5 Users
ONVIF Conformance	Yes
Web Viewer	OS: Windows XP / Vista / 7, MAC OS Browser: Internet Explorer, Chrome, Firefox, Safari
Video Management Software	DW Spectrum
Memory Slot	Micro SD/SDHC Card (4GB-32GB) Recording on Network Loss Card Not Included*
ENVIRONMENTAL	
Operating Temperature/ Humidity	-10°C ~ 50°C (14°F ~ 122°F)
Operating Humidity	Less than 90% (Non-Condensing)
IP Rating	IP66 (Protects against dust and high pressure water)
Other Certifications	CE, FCC, RoHS
ELECTRICAL	
Power Requirement	DC 12V, PoE (IEEE802.3af Class 2)
Power Consumption	3.6W, 300mA / LED ON: 4.3W, 360mA
MECHANICAL	
Material	Aluminum Die-casting
Dimensions	Ø 125 x 74.3mm (Ø 4.9 x 2.9")
Weight	1 lbs

*Specification is subject to change without prior notice.