

GS-609HM CCTV Camera Housing & Mount

GS-609HBHM CCTV Camera Housing & Mount with Heater, Blower and Sun Shield

GS-9001HMA 11.5" Aluminum Housing Mount

FEATURES:

- Medium indoor / outdoor enclosures
- Spring assisted forward opening lid
- Aluminum construction
- Optional field installed heaters, blower & sunshade
- Temperature reduced by 3 °C - 5 °C with sunshade
- 2 UL cable entry glands on bottom of enclosure with maximum diameter of 1.3cm



SPECIFICATIONS:


MODEL	GS-609HBHM
INPUT VOLTAGE	AC 24V
POWER	Heater: 25V / Blower: 2.3W
CONSTRUCTION	Aluminum
VIEWING WINDOW	Opening 2.13" (5.4cm)
MAX. SIZE CAMERA & LENS	6.85" x 3.54" x 2.85" (17.4x9x7.25cm)
HEATER & BLOWER ACTIVATES	ON: 32°F +/- 9°F (0°C +/- 5°C) OFF: 68°F (20°C)

GS-609HBHM

ACCESSORY PACKAGE:


- 1 Medium outdoor housing
- 1 Instruction sheet
- 1 Screw (Ø6x6mm)
- 2 Screws (Ø6x12mm)
- 1 Aluminum mount w/accessories

Dimension Drawing



enclosure dimension	TY-44MO
A	14.88" (37.8cm)
B	12.83" (32.6cm)
C	5.33" (13.55cm)

Note: in (), the unit is cm, other is




GS-9001HMA

11.5 Inch Aluminum Housing Mount

MOUNTING	3 Screw/Visable
LOAD RATING	10Kg
DIMENSIONS	11.22" x 3.33" x 3.92" (285.0 x 84.7 x 99.5mm)
CONSTRUCTION	Aluminum
FINISH	Beige
WEIGHT	Net 553g

ACCESSORIES: 3 Screws (Ø3x25mm) / 3 Anchors (Ø6x25mm)

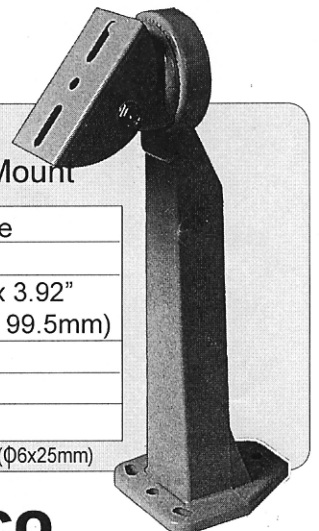

GOLDEN STATE INSTRUMENT CO.

14256 Doolittle Drive • San Leandro, CA 94577 • 1-800-227-2330 • Fax (510) 352-5988

Website: www.goldenstateinst.com • Email: gsi@goldenstateinst.com