



#### KEY FEATURES:

- 10pps @ 5MP, 15pps @ 3MP, 30pps @ 2MP or 1.3MP
- 3.6mm Fixed Lens
- Day/Night functionality with ICR
- 30 IR LEDs (Up to 100ft)
- Back Light Compensation: BLC
- Digital WDR
- Built-in PoE / 12VDC
- ONVIF Version 2.2
- Built-in web server for resolution, bit-rate adjustment


#### CONSTRUCTION:

- 4" Polycarbonate Bubble
- 3-Axis Gimbal
- Surface Housing
- Aluminum Mounting Accessories (Optional)
- Weatherproof - IP66

#### AVAILABLE MODELS:

- EA-WM100

#### DIMENSIONS (INCH:MM):

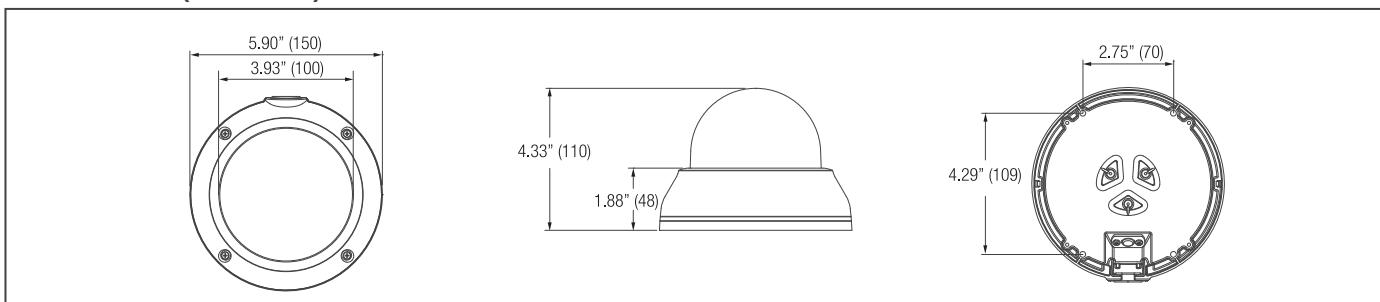

#### TECHNICAL SPECIFICATION:

5MP Flexible IP Vandalproof Dome	NC-5M-OV3
<b>Resolution</b>	5MP / 3MP / 2MP / 1.3MP
<b>Image Sensor</b>	1/3" CMOS
<b>Day/Night Functionality</b>	Yes w/ ICR
<b>Lens Type</b>	3.6mm fixed lens
<b>Angle of View</b>	70° (W)
<b>IR LEDs</b>	30
<b>IR LEDs Distance</b>	Up to 100ft.
<b>LEDs Illumination Angle</b>	80°
<b>Video Compression</b>	H.264 / MJPEG
<b>Frame Rate</b>	10pps@5MP, 15pps@3MP, 30pps@2MP
<b>Electronic Shutter</b>	1/30 ~ 1/20,000 sec.
<b>Minimum Illumination</b>	0.8 Lux (Color), 0.0 Lux (B/W)
<b>Power Over Ethernet (PoE)</b>	IEEE 802.3af compliant
<b>General Information</b>	<b>NC-5M-OV3</b>
<b>Operating Temperature</b>	-20°F ~ 122°F
<b>Operating Humidity</b>	Within 90% RH
<b>Power Consumption</b>	Up to 14W / 1A
<b>Input Voltage</b>	POE & 12VDC

\*Specifications are subject to change without any prior notice.

#### SMART IR LEDS GET YOU COVERED:

Tired of "hotspots" or too much IR reflection? Our new EasyView™ Lite dome cameras have got it covered - Smart IR LEDs.

All our EasyView™ Lite dome cameras come equipped with Smart IR LED technology that detects too much IR reflection and automatically compensates by decreasing the intensity. Smart.



#### NEW CONVERTABLE GIMBAL DESIGN:



VF lens with no LED shown