


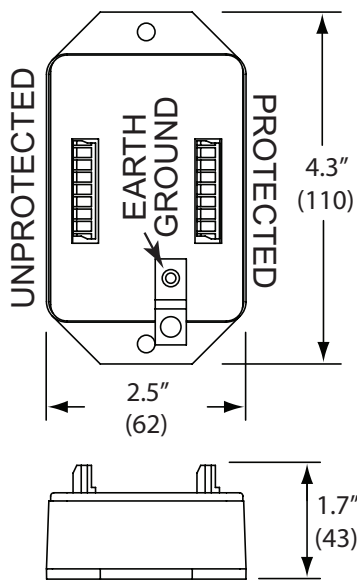

Description


The **UTPPTR4** is a four channel, multi-function surge protector for twisted pair transmission of video and RS422 data signals. The UTPPTR4 provides multi-stage surge protection to data control boards or other accessories connected to the system. The unit is designed as a building entrance protector. The UTPPTR4 provides a heavy, single point ground connection and is easily installed in minutes.

Features

- Unique multi-stage design
- 15V clamping voltage
- Heavy single point ground
- Easy to install
- Lifetime warranty

Specifications

Size	1.7" H x 4.3" W x 2.5" D
Connection Method	Punchdown terminals
Clamping Voltage	15V
Impedance	110 ohms
Temperature	-20°C to +65°C
Frequency	DC to 10 MHz
Shipping Weight	1 lb

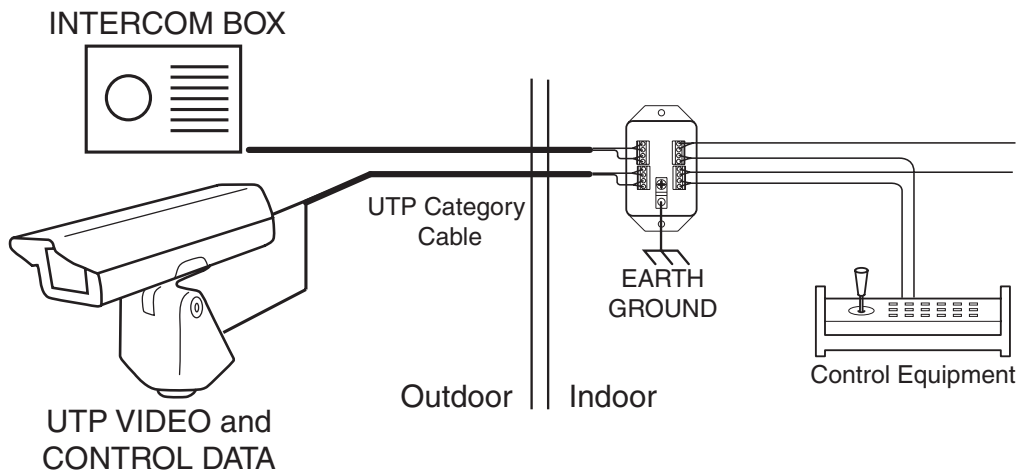

NITEK®

USA

5410 Newport Drive, # 24
Rolling Meadows, IL 60008
Phone: (847) 259-8900
Fax: (847) 259-1300
E-mail: info@nitek.net
WWW.NITEK.NET

EUROPE

De Schans 19-21 2a
8231 KA Lelystad
Tel: +31(0)320-2300005
Fax: +31(0)320-282186
E-mail: info@nitek.nl
WWW.NITEK.NL