

SAMSUNG TECHWIN

Samsung Lens

Installation Guide

SLA-M-M21D



SAMSUNG

Samsung Lens

Installation Guide

Copyright

©2013 Samsung Techwin Co., Ltd. All rights reserved.

Trademark



SAMSUNG TECHWIN is the registered logo of Samsung Techwin Co., Ltd.

The name of this product is the registered trademark of Samsung Techwin Co., Ltd.

Other trademarks mentioned in this manual are the registered trademark of their respective company.

Restriction

Samsung Techwin Co., Ltd shall reserve the copyright of this document. Under no circumstances, this document shall be reproduced, distributed or changed, partially or wholly, without formal authorization of Samsung Techwin.

Disclaimer

Samsung Techwin makes the best to verify the integrity and correctness of the contents in this document, but no formal guarantee shall be provided. Use of this document and the subsequent results shall be entirely on the user's own responsibility. Samsung Techwin reserves the right to change the contents of this document without prior notice.

- ❖ Design and specifications are subject to change without prior notice.
- ❖ The default password can be exposed to a hacking thread so it is recommended to change the password after installing the product.

Note that the security and other related issues caused by the unchanged password shall be responsible for the user.

Thank you very much for purchasing our Cameras and Lenses.

Please follow the procedures outlined in this guide for changing out the lens on the SNV-6012M and SNV-6013 cameras.

The procedure will be different for each camera.

Please take care not to touch the glass parts on the lenses after removing the protective coverings.




The package will include the actual lens and a Nylon ring shown above.

SNV-6013 Lens Installation

To install the lens on to the SNV-6013 camera, please open the camera.

Now remove the installed lens by turning it counter clockwise. Please hold the camera module with your other hand.

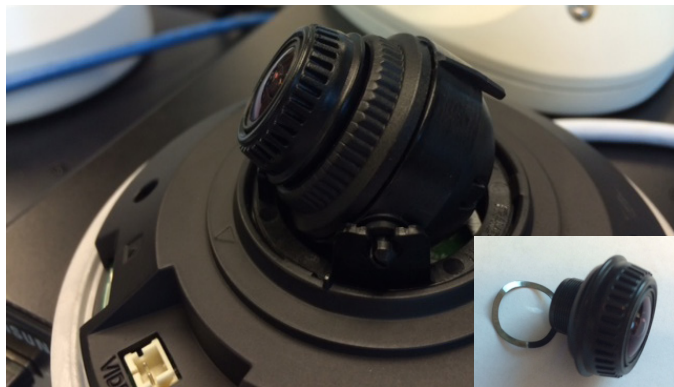


Please take care not to lose the spring-washer included with the original lens.

SNV-6013 Lens Installation

Take the new optional lens and insert the Nylon washer and spring washer, mount it to the camera as in the picture below.

Take care not to damage the threads or cross thread the lens.

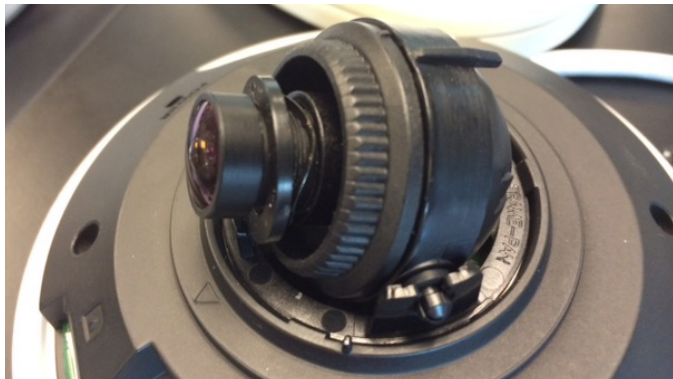

SNV-6013 Lens Installation

Turn the lens until the spring washer starts to compress some pressure is felt.

Now power up and focus the camera by moving the lens until the picture is in focus.



You are now ready to mount and close up the camera.

Thank you very much for purchasing our Cameras and Lenses.

Please follow the procedures outlined in this guide for changing out the lens on the SNV-6012M and SNV-6013 cameras.

The procedure will be different for each camera.

Please take care not to touch the glass parts on the lenses after removing the protective coverings.

For the SNV-6012M, when removing the included lens, you will find the lens has a black metal washer and a spring-washer. Take care not to misplace the washers as you will need them for the new lens installation.



Utilize the same two washers in the same order to mount the lens. *(The Nylon washer included with the new lens will not be needed for the SNV-6012M)*

Install the lens in to the camera.



Turn the lens until some pressure is felt, Now power up and focus the camera by moving the lens until the picture is in focus.

You are now ready to mount and close up the camera.



SALES NETWORK

SAMSUNG TECHWIN CO., LTD.

Samsungtechwin R&D Center, 701, Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do, Korea, 463-400
TEL : +82-70-7147-8740~60 FAX : +82-31-8018-3745

SAMSUNG TECHWIN AMERICA Inc.

100 Challenger Rd. Suite 700 Ridgefield Park, NJ 07660
Toll Free : +1-877-213-1222 Direct : +1-201-325-6920
Fax : +1-201-373-0124
www.samsungcctvusa.com

SAMSUNG TECHWIN EUROPE LTD.

Samsung House, 1000 Hillswood Drive, Hillswood Business
Park Chertsey, Surrey, UNITED KINGDOM KT16 0PS
TEL : +44-1932-45-5300 FAX : +44-1932-45-5325