



KPC-VD61NU

750TVL Mini Vandalproof Dome Camera

www.ktncusa.com


- 750TVL Horizontal Resolution
- Min. Illumination of 0.05 Lux
- IP67 (Weather Proof)
- Digital Day & Night
- 2D DNR / AWB / AGC / BLC
- 1/3 " SONY EXview HAD CCD II
- DC 12 V Power

Resolution
960


Resolution 960

- 750TVL Horizontal Resolution
- Min.Illumination of 0.05 Lux
- IP67 (Weather Proof)
- Digital Day & Night
- 2D DNR / AWB / AGC / BLC
- 1/3 " SONY EXview HAD CCD II
- DC 12 V Power


General Feature Diagram Unit: (inch)

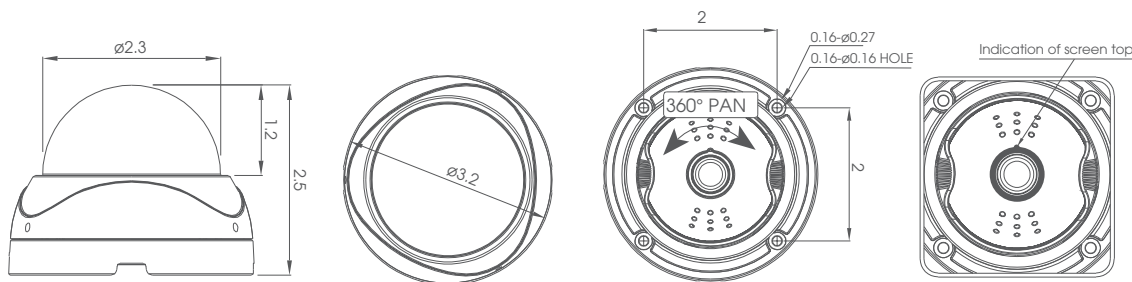

Easy Camera Mounting Position

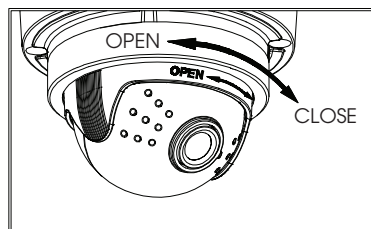

- (step 1) Turn the lock counterclockwise pushing it up to loosen it for ball part adjustment.
(step 2) loosen once more to dispart them completely.

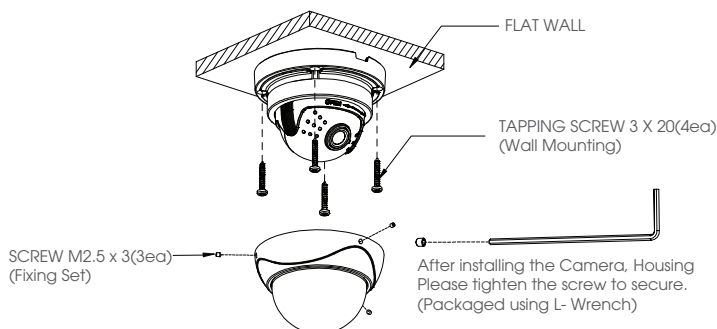

KPC-VD61NU

750TVL Mini Vandalproof Dome Camera



Technical Specification

Signal System	NTSC		
Image Sensor	1/3 " SONY EXview HAD CCD II		
Scanning System	2:1 Interlace		
Horizontal Resolution	750TV Lines		
Scanning Frequency	15.734 KHz x 59.94 Hz (H x V)		
Total Pixels	Effective Pixels	1020 x 508 (H x V)	976 x 494 (H x V)
Synchronization	Internal		
Lens	2.45 mm, 2.97 mm, 3.6 mm, 4.3 mm, 6 mm, 8 mm, 12 mm, 16 mm		
Lens Type	Fixed Board Lens		
S/N	More than 50 dB (AGC Off)		
Gamma	$r = 0.45$		
Min. Illumination	0.05 Lux (30 IRE@F2.0)		
Shutter Speed	1/60 ~ 1/100,000 sec		
Day & Night	Digital Day & Night		
IP Rating	IP67 (Weather Proof)		
Video Output Level	1.0 Vp-p Composite (75 Ω)		
DNR	2D DNR		
White Balance	ATW, Push		
Operating Temperature	14 °F ~ 122 °F (-10 °C ~ 50 °C)		
Storage Temperature	-4 °F ~ 140 °F (-20 °C ~ 60 °C)		
Power Supply	DC 12 V ($\pm 10\%$), Max. 110 mA		
Dimension	$\phi 3.2$ x 2.5 inch ($\phi 82$ x 64 mm)		
Weight	0.6 lbs (272 g)		

Lens Option

LENS (mm)	Type	Board Lens (B)		
	Focal Length	2.97	3.60	6.0
	Aperture	F2.0	F2.0	F2.0
	Angle of View	130 °	92 °	53 °