




MODEL #		VZ-55UNL
VIDEO		
Screen Size		55"
Max. Resolution		1920 x 1080 @60Hz
Pixel Pitch		0.63025mm x 0.63025mm
Brightness		500cd/m ² (Typical)
Contrast Ratio		3500:1
Aspect Ratio		16 : 9
Viewing Angle (H/V)		178° / 178°
Display Color		16.7 Million
Response Time		< 8ms
Video System		NTSC / PAL
Frequency (H)		31 ~ 80Khz
Frequency (V)		56 ~ 75Hz
INTERFACE		
VGA In (15Pin D-Sub)		1
DVI-D In		1
HDMI In		1
RJ-45 In		1
PC Stereo In / Out		1 / 1
AUDIO		
Built in speaker		2W X 2
SPECIAL FEATURES		
Bezel Width	TOP and LEFT Side	0.118" / 3 mm
	BOTTOM and RIGHT Side	0.114" / 2.9 mm
	ACTIVE AREA to ACTIVE AREA	0.232" / 5.9 mm
RJ-45 Control Program		Monitor OSD
Image Rotation		YES
Rotate IR receiver		YES
Multi-lingual Language		English, Spanish, French, German, Italian, Portuguese, Dutch
DIMENSIONS & WEIGHT		
Outline Dimension (W x H x D)		47.85" x 27.02" x 5.50" (1215.99mm x 686.30mm x 139.70mm)
Net Weight		41.5kg / 91.49 lbs
MOUNT		
VESA		600 x 100 x 100 x 100mm, M8x12 Screws
GENERAL		
Transmitter - IR Remote Control		YES
Power	Electrical Ratings	AC100 ~ 240V(50/60Hz)
	Consumption	330 W
Warranty	Parts/ Labor	3 Year / 3 Year
	MTBF (Approx.)	50,000 Hours
Operating Temperature		32 - 104°F / 0 - 40°C
Compatible Mounts	Wall	VZ-XM55, VZ-WM71
	Ceiling	VZ-CMK04, VZ-CMKIT-04


VZ-55UNL ADVANTAGES

- 55" 1080p CCTV LED Monitor
- Ultra Narrow 3mm Metal Bezel
- Video Wall Construction - Active to Active Bezel Width 5.9 mm
- OSD Function Control through RJ-45 protocol
- Digital & Analog Inputs, 3-Year Warranty
- Image Rotation Feature Prevents "Pixel Burn-In"

DIMENSIONS

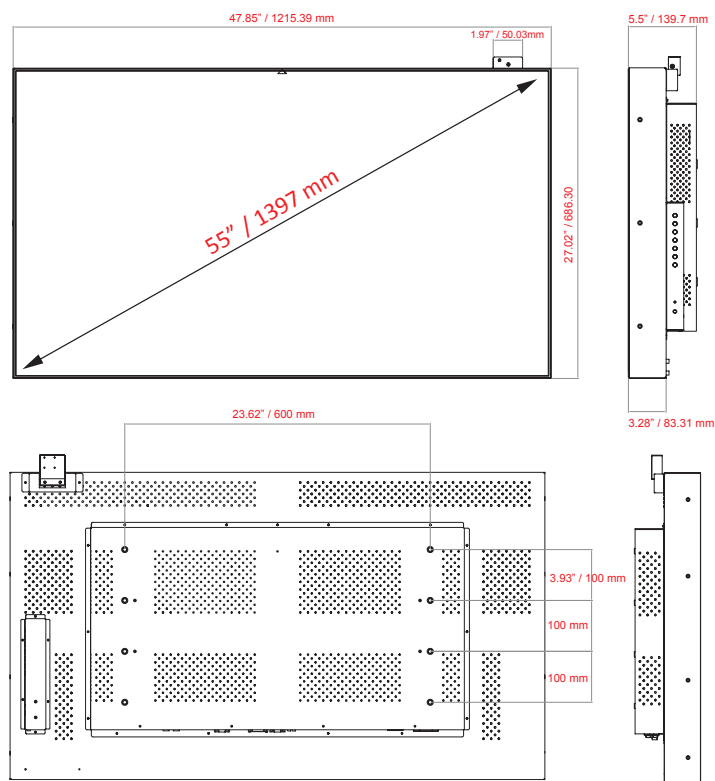

INTERFACE

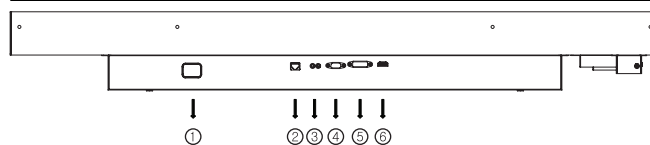

1. AC 110V IN
2. RJ-45 IN
3. PC STEREO IN/OUT
4. VGA IN
5. DVI-D IN
6. HDMI IN

Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.