


INSTALLATION INSTRUCTIONS:

1. OUR STANDARD 1069FP ASSEMBLY WILL WORK WITH A FRAME/WALL OF UP TO 5 1/2" WIDTH - CUSTOMIZED ASSEMBLIES CAN BE MADE FOR WIDTH'S RETURN GREATER THAN 5 1/2".
2. TO DETERMINE THE HANDING FOR OUR 1069FP ASSEMBLY, REFER TO SHEET 4.
3. TO ADJUST THE RESISTANCE TO LOCK/UN-LOCK:

TURN SET-SCREW CW - USE 3/16" HEX KEY (ALLEN WRENCH)
TO INCREASE RESISTANCE TO LOCK/UNLOCK


TURN SET-SCREW CCW - USE 3/16" HEX KEY (ALLEN WRENCH)
TO DECREASE THE RESISTANCE TO LOCK/UNLOCK

4. PREPARE DOOR AND FRAME AS INDICATED ON SHEET 2 OR 3 DEPENDING UPON DOOR THICKNESS. (STRIKE PREPARATION IS THE SAME REGARDLESS)
5. INSERT DOOR PULL AND INSTALL USING QUANTITY FOUR (4) #8X1-5/8" FH PH DRYWALL SCREWS (SUPPLIED)
6. INSTALL STRIKE USING TWO (2) #8X3/4" FH WS (SUPPLIED) THEN TEST UNIT.
7. INSTALL LOCK/UNLOCK DECAL AS SHOWN.
8. INSTALL SLIDE DECALS AS SHOWN (SEE SHEET 4)


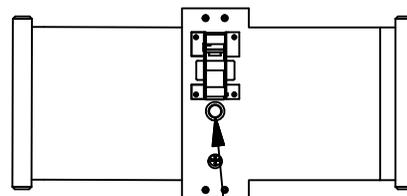


REFER TO NOTE 3
TO ADJUST LOCK/UN-LOCK
RESISTANCE

LH SHOWN
BACK VIEW

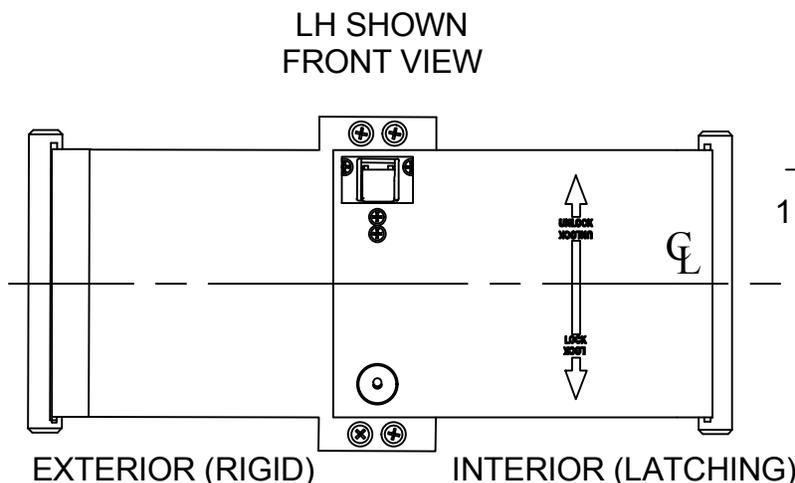


1069FP POCKET DOOR PULL

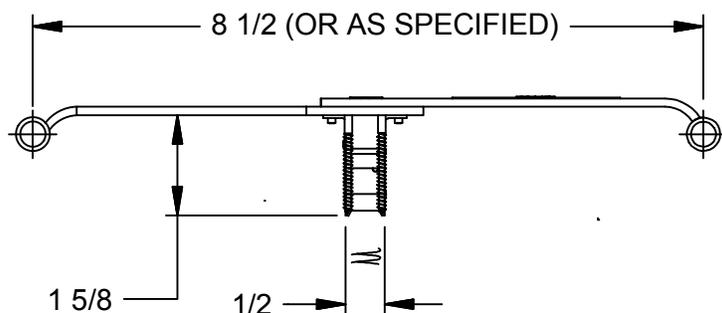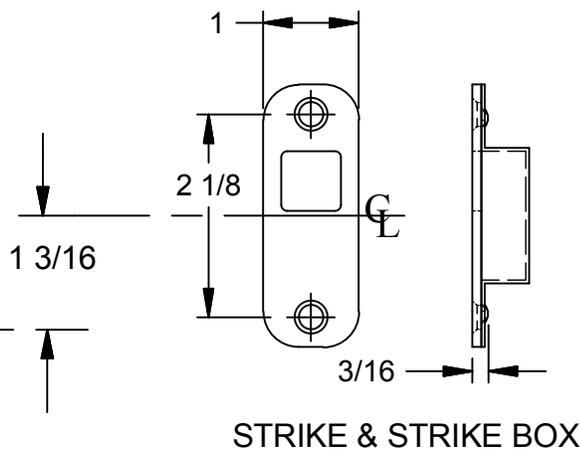

SHEET 2 OF 4 DOOR PREP FOR 1-3/8" WOOD DOOR
SHEET 3 OF 4 DOOR PREP FOR 1-3/4" WOOD DOOR AND WIDER

PREP FOR STRIKE
IN WOOD FRAME

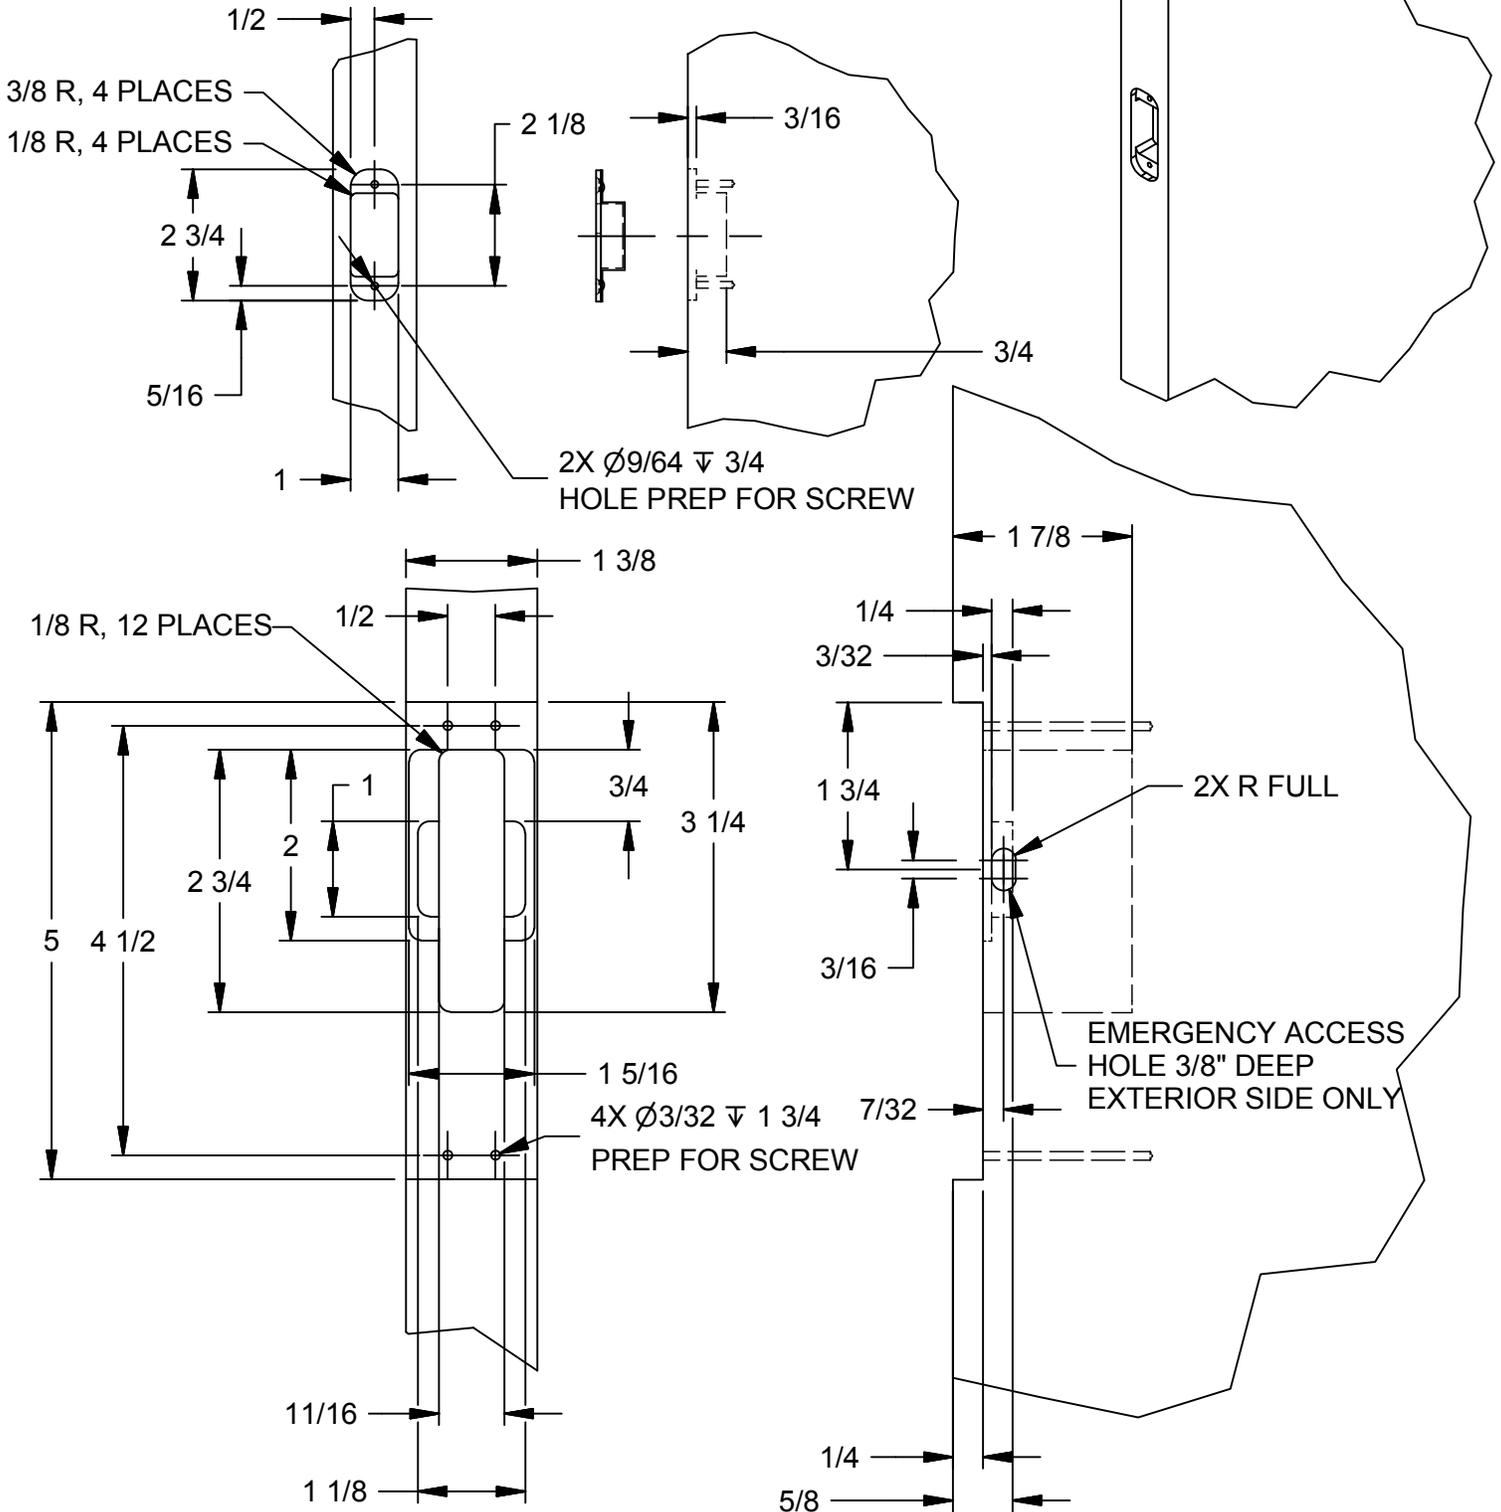


DOOR PREP FOR 1-3/8" WOOD DOOR - CENTER PATTERN IN DOOR THICKNESS


NOTE: This template is provided for use only on the job for which is was requested. Trimco reserves the right to make design changes without notice. Trimco will not be responsible for errors or damage caused by the use of out-of-date templates.

DATE

07/18/16

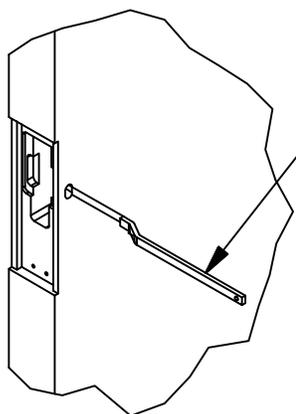


EMERGENCY
ACCESS TOOL

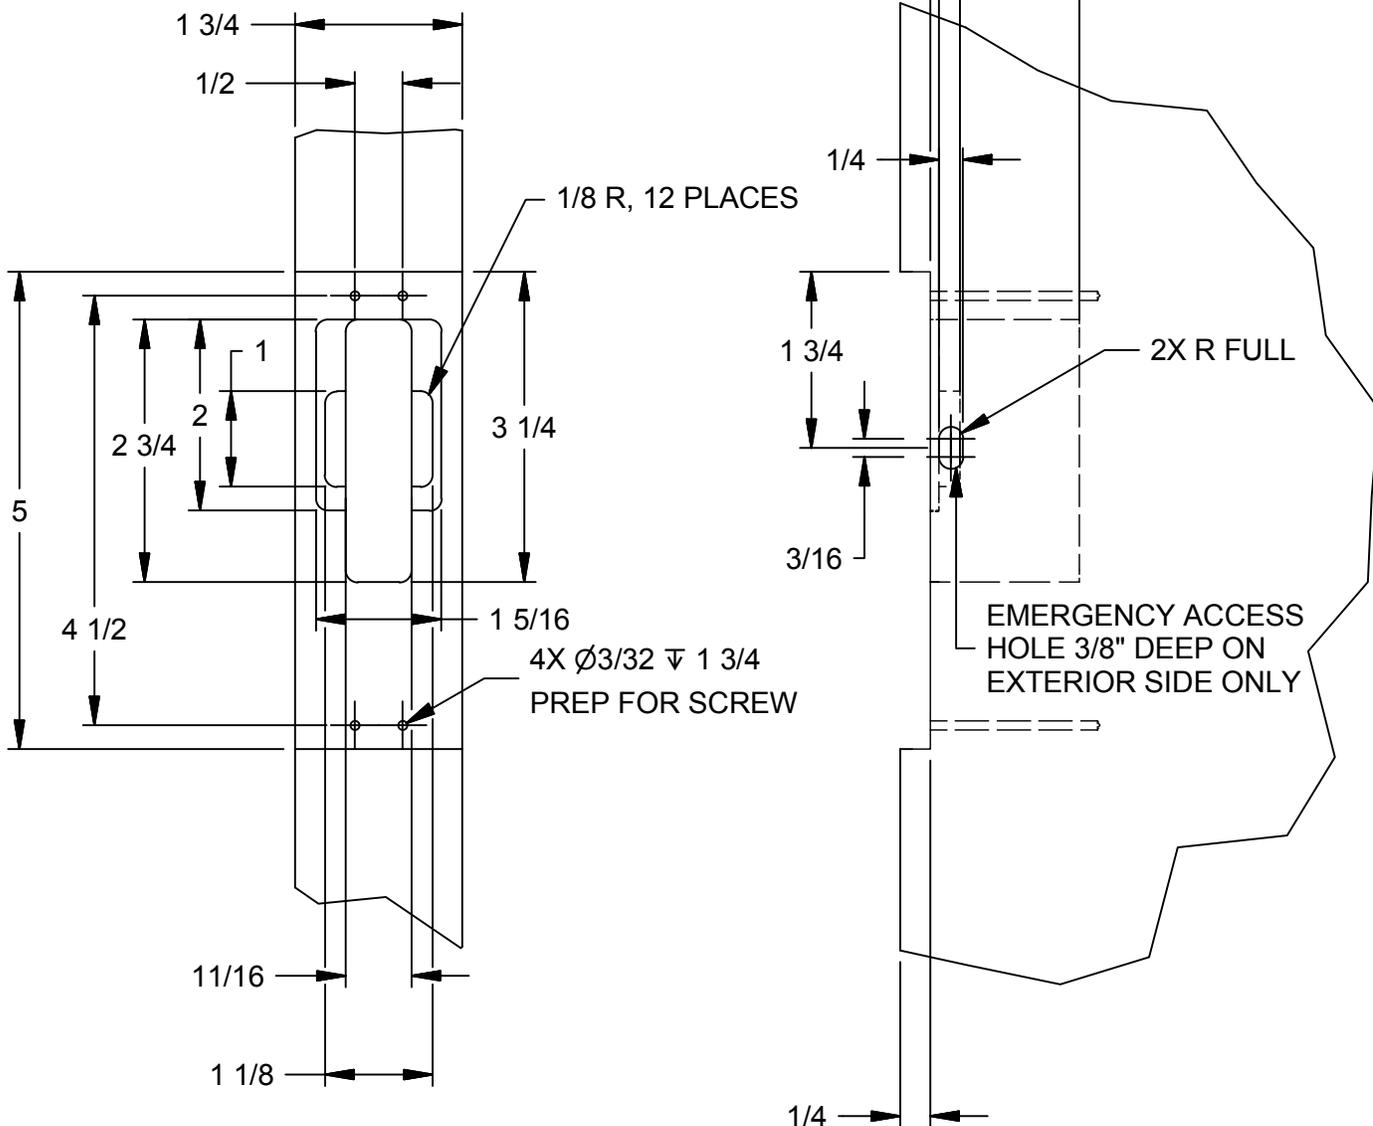


DOOR PREP FOR 1-3/4" WOOD DOOR AND WIDER
CENTER PATTERN IN DOOR THICKNESS

TO DETERMINE THE HANDING ON THE 1069FP, CONSIDER THE FOLLOWING:


1. THE RIGID HANDLE ON THE 1069FP IS ON THE EXTERIOR.
2. THE LATCHING HANDLE (THAT LOCKS THE DOOR) IS LOCATED ON THE INTERIOR SIDE.
3. CLOSE THE POCKET DOOR.
4. IF THE DOOR SLIDES TO THE RIGHT TO OPEN, AND YOU ARE OUTSIDE, THEN THIS IS A RIGHT HANDED SLIDING DOOR.
5. IF THE DOOR SLIDES TO THE LEFT TO OPEN, AND YOU ARE OUTSIDE, THEN THIS IS A LEFT HANDED SLIDING DOOR.

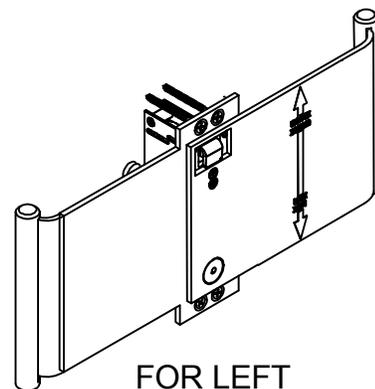

FOR LEFT HANDED DOOR

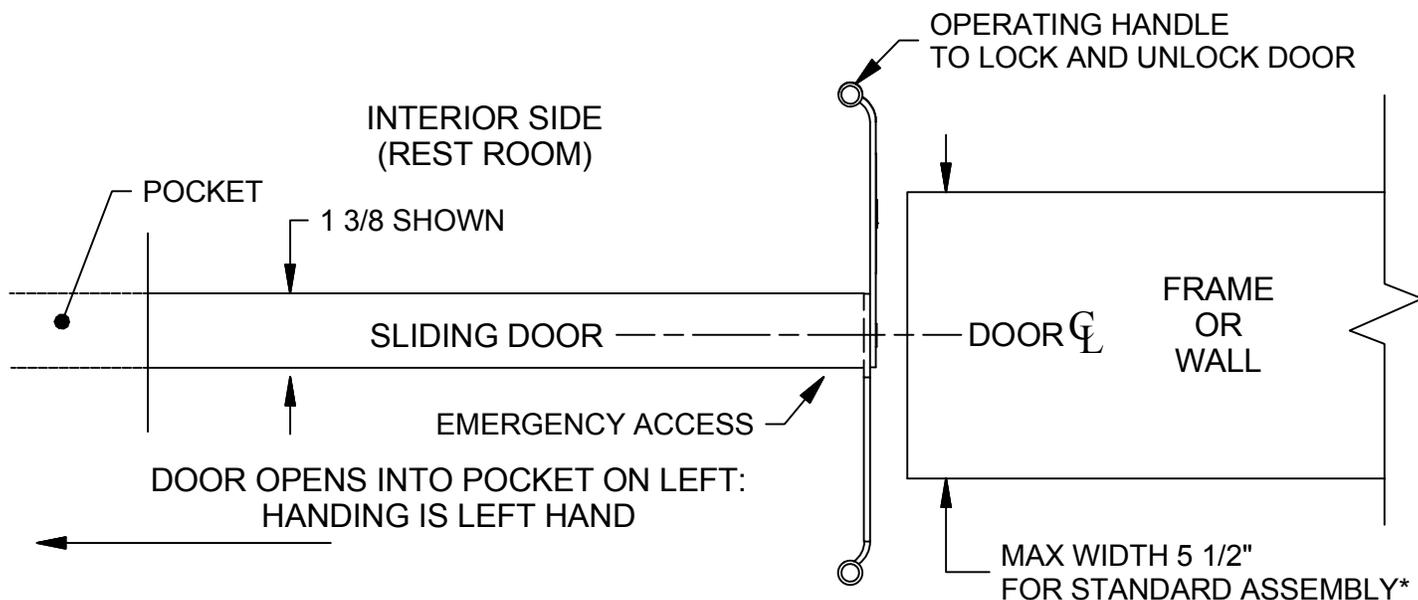

SUGGESTED LABEL LOCATION

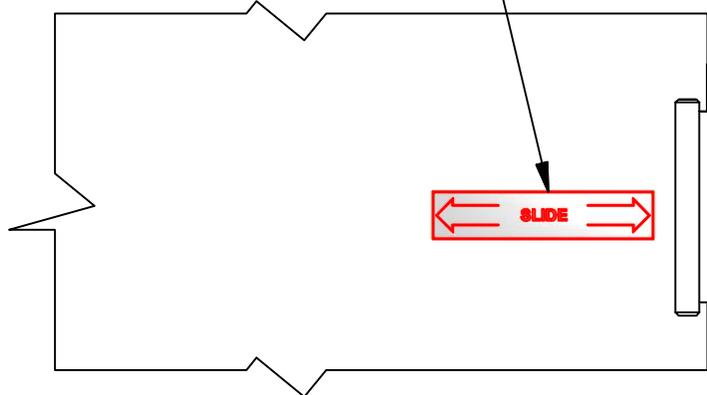

* CUSTOMIZED ASSEMBLIES CAN BE MADE FOR WIDTH'S GREATER THAN 5 1/2"

HANDING IS REQUIRED SO THAT THE OPERATING HANDLE IS ON THE INTERIOR SIDE SO WHEN USED WILL LOCK THE DOOR

NOTE: THE EMERGENCY ACCESS IS ALSO LOCATED ON THE EXTERIOR SIDE NEXT TO THE RIGID HANDLE

Trimco
1069FP
Full Privacy Pocket Door Pull
© 2016 Trimco
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of Trimco. Trimco is not responsible for errors or for any consequences arising from the use of the information contained herein. Trimco is not responsible for any damage caused by the use of out-of-date templates.