


CRL Narrow Commercial Door Astragal With Weathership

- Extruded Aluminum Channel Weatherstrip
- Retrofits Kawneer® Astragals

The CRL Narrow Commercial Door Astragal installs with just a screwdriver and the pre-punched spring tensioners assure fast, easy adjustment to the mating surface. It is similar to, and will retrofit, Kawneer® astragals with a center channel width of 1/2" (12.7 mm) or more. **NOTE:** There are six spring clips included with each Astragal. If additional clips are needed order our Cat. No. R011GCL1P.

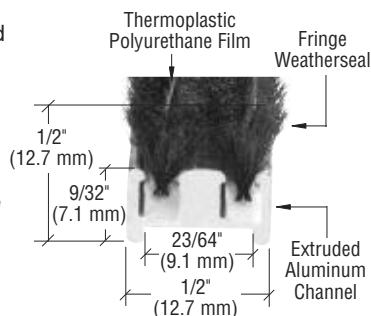


CAT. NO.	FINISH	LENGTH
R011G83L	Mill Aluminum	84" (2133 mm)
R011G96L	Mill Aluminum	96" (2438 mm)
R011GCL1P	---	Spring Clip

Minimum order: 1 each.

CRL Combination Astragal and Flush Bolt Assembly

- For 1-3/4" (44.4 mm) Doors
- Positive Latch Flush Bolts

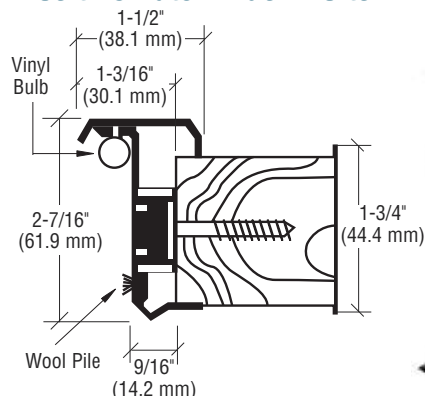

This CRL Combination Astragal and Flush Bolt Assembly is installed on the inactive leaf of a pair of 1-3/4" (44.4 mm) thick doors. The top and bottom flush bolts, with 1" (25.4 mm) throw, offer secure locking, and the Astragal helps prevent attempts to "jimmy" the lock. The assembly also includes the dual-seal of a vinyl bulb and wool pile weatherstrip to provide moisture and wind protection. A strike is supplied, or you may use the strike supplied with your lockset. It comes complete with detailed installation instructions and all necessary hardware.

CAT. NO.	FINISH	LENGTH
WS059AV80	Satin Anodized	80" (2032 mm)
WS059DV80	Dark Bronze Anodized	80" (2032 mm)
WS059WV80	White	80" (2032 mm)

Minimum order: 1 each. Finishes can be combined for quantity pricing.


Kawneer is a registered trademark of Alcoa Inc., and its subsidiaries and affiliates.

CRL Wide Commercial Door Astragal With Weathership

new

- Extruded Aluminum Channel Weatherstrip
- Retrofits U.S. Aluminum Adjustable Astragal

This CRL Adjustable Astragal is now available for replacement of meeting Stile Astragals found on existing pairs of U.S. Aluminum doors. The Adjustable Astragal comes spring loaded with weatherseal on two sides for optimum air resistance. **NOTE:** Preparation for lock cut-out required.

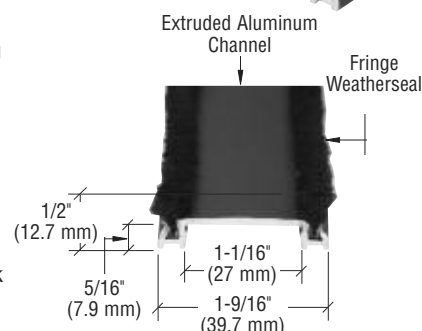


CAT. NO.	FINISH	LENGTH
HP35711	Clear Anodized	84" (2133 mm)
HP35722	Bronze Anodized	84" (2133 mm)

Minimum order: 1 each.

CRL Automatic Security Astragal

- Non-Handed and Field-Sizeable
- Two Anodized Finishes

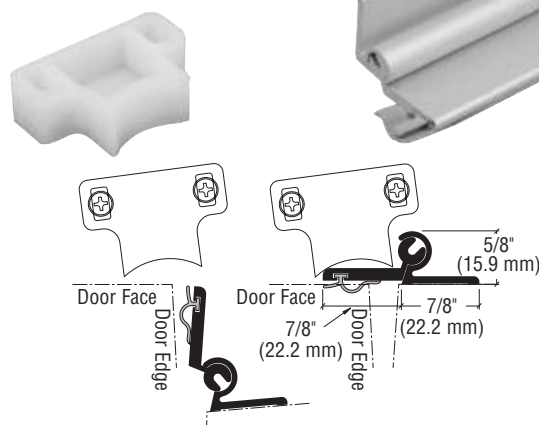

This CRL Automatic Security Astragal is a simple, yet effective weatherstrip for paired doors. It quickly and quietly moves out of the way when the door is opened. The header-mounted cam guides the astragal strip back into its overlapping position automatically when either door is closed without requiring a coordinator. When closed, the Astragal forms an effective weatherseal that is wind, dust, and insect resistant. It also provides door security and does not show from exterior. No cutting or other modifications need to be made to the doors prior to installation. It's reversible, and can be used on any new or existing pair of outswinging doors.

CAT. NO.	FINISH	LENGTH
37896A	Clear Anodized	96" (2438 mm)
37896DU	Bronze Anodized	96" (2438 mm)

Minimum order: 1 each. Finishes can be combined for quantity pricing.

CRL Pile Weatherstrip for Door Rails

- Specially Designed to Help Reduce Air and Water Infiltration
- Fits All CRL Door Rails
- Available in Two Finishes

To help reduce the infiltration of air and water we offer CRL Pile Weatherstrips for Door Rails. Pile Weatherstrips attach without modifications to the specially designed recess on the inside of the Door Rail using the Very Hi-Bond Tape that is already attached to each piece.

Our Door Rails are designed specifically to receive the Pile Weatherstrips in a way that will not obstruct the standard hardware used in the Door Rails. You can order them to fit stock Door Rails, or in 144" (3.66 m) stock lengths that can be cut to fit custom door rails.



CAT. NO.	TYPE	FINISH	UNIT
DRWSAS	Single Door Rail	Satin Anodized	Set of 2
DRWDUS	Single Door Rail	Black Bronze Anodized	Set of 2
DRWSA144	*Stock Length	Satin Anodized	144" (3.66 m)
DRWDU144	*Stock Length	Black Bronze Anodized	144" (3.66 m)

Minimum order: 1 set or stock length. Finishes can be combined for quantity pricing. Packing Charge added to orders of fewer than 5 combined lengths of DRWSA144 and DRWDU144. *Stock lengths must ship common carrier, unless you specify we cut them for UPS. A Cutting Charge will apply.

CRL Weatherstrip Kits for Heavy Glass Doors With 4" Door Rails

- Low Profile Maximizes 'All-Glass' Look
- Reduces Drafts Without Detracting From Appearance of Door
- Clear Polycarbonate or Metal Channel for 1/2" (12 mm) Thick Glass



CRL Weatherstrip Kits for 'all-glass' doors are available to fit doors using our 4" Tapered or Square Door Rails. The Kit includes a 98" (2.49 m) length of either Clear Polycarbonate or polished finish Aluminum Extrusions with 106" (2.69 m) of Wool Pile Weatherstrip, plus a top and bottom Split End Cap with a Center Weatherstrip Receptacle Bar. All Weatherstrip Kits are easy to install using our Transparent Very Hi-Bond Tape (see page 654W).

IMPORTANT NOTE: The door glass width will need to be reduced by 1/4" (6 mm) on each side that the Weatherstrip Kits are to be installed on.



Full Length Wool Pile Weatherstrip

CLEAR POLYCARBONATE 4" TAPERED RAILS CAT. NO.	CLEAR POLYCARBONATE 4" SQUARE RAILS CAT. NO.	ALUMINUM 4" TAPERED RAILS CAT. NO.	ALUMINUM 4" SQUARE RAILS CAT. NO.	FINISH
CTW12PS	CSW12PS	MTW12PS	MSW12PS	Polished Stainless
CTW12PB	CSW12PB	MTW12PB	MSW12PB	Polished Brass
CTW12BS	CSW12BS	MTW12BS	MSW12BS	Brushed Stainless
CTW12DU	CSW12DU	-----	-----	Black Bronze Anodized
CTW12SA	CSW12SA	-----	-----	Satin Anodized

Minimum order: 1 each. All Weatherstrip Kits can be combined for quantity pricing.




CRL Vertical Weatherstile Kits

- Kits for 1/2" (12 mm) or 3/4" (19 mm) Tempered Glass Doors
- Reduces Drafts and Protects the Edge of the Glass
- Five Architectural Finishes

CRL Vertical Weatherstile Kits have been redesigned for use with newly fabricated single or double doors with either 1/2" (12 mm) or 3/4" (19 mm) tempered glass.

These narrow stiles not only reduce drafts, but they also protect the edge of the glass with minimal disruption of the 'all-glass' look. Five architectural finishes are available to match the adjacent metal finish of most any commercial door.

Installation is accomplished with internal Bonding Strips that attach to the glass with Very Hi-Bond Tape for a secure and accurate fit every time. This replaces the traditional glue-on weatherstile that would need time for adhesive to set prior to installation.

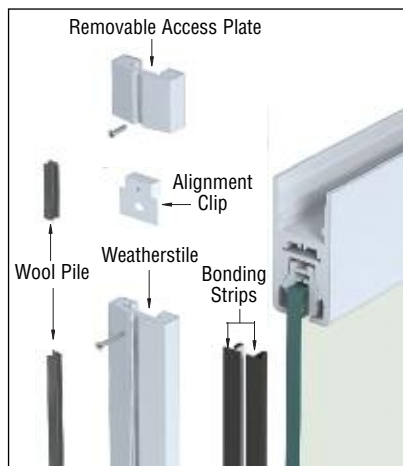

Vertical Weatherstile Assembly

NOTE: CRL Vertical Weatherstiles are intended only for use on newly fabricated doors being installed into a new or existing opening. They cannot be used on existing doors with pre-installed door rails.



- Works With CRL DRS Wedge-Lock™ 4", 6", and 10" (102, 152, and 254 mm) Door Rails Only

CRL Vertical Weatherstile Kits include two 117" (2.97 m) lengths of Weatherstile with Wool Pile Weatherstrip, one 120" (3.05 m) black EPDM Filler Strip (for double door applications), four 117" (2.97 m) lengths of Bonding Strips with Very Hi-Bond Tape, four 1-1/2" (38 mm) tall Weatherstripped Removable Access Plates with Alignment Clips, and installation instructions. Custom lengths up to 117" (2.97 m) are available on special order.

KITS FOR 1/2" (12 MM) GLASS


CAT. NO.	CLADDED FINISH
W12SAS	Satin Anodized
W12DUS	Black Bronze Anodized
W12BSS	Brushed Stainless
W12PSS	Polished Stainless
W12PBS	Polished Brass

Minimum order: 1 set. Finishes can be combined for quantity pricing. All Weatherstiles have a clad finish.


KITS FOR 3/4" (19 MM) GLASS

CAT. NO.	CLADDED FINISH
W34SAS	Satin Anodized
W34DUS	Black Bronze Anodized
W34BSS	Brushed Stainless
W34PSS	Polished Stainless
W34PBS	Polished Brass

Minimum order: 1 set. Finishes can be combined for quantity pricing. All Weatherstiles have a clad finish.

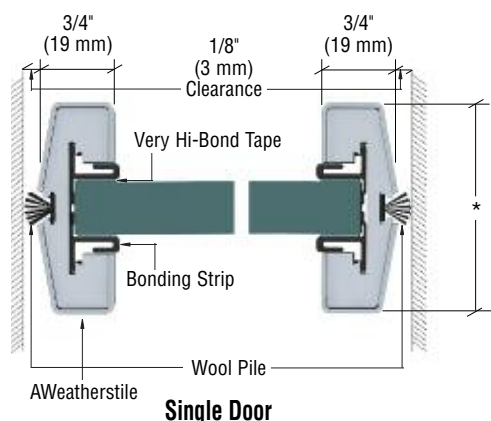

Single Door

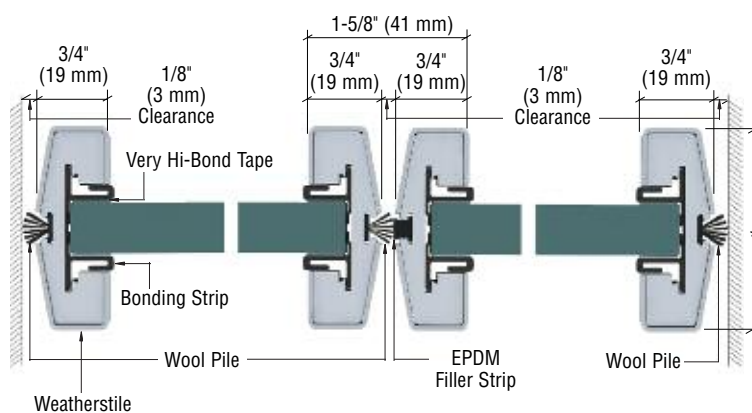


Double Door

* Overall width is 2" (51 mm) for 1/2" (12 mm) glass; 2-1/4" (57 mm) for 3/4" (19 mm) glass.

CRL Zipper Pile Weatherstrip


- Replaces Old or Worn-Out Pile Weatherstripping in Doors and Windows
- New Zipper Tooth Design Allows Pile to Easily Snap in From Above the Extrusion Slot
- High Density Gray Pile With Double Center Fin

CRL Zipper Pile Weatherstrip is a full density, high performance, water-resistant pile woven to a unique zipper tooth design polypropylene backing. The new zipper tooth design allows the pile to easily snap into the extrusion slot from above rather than having to slide the pile in from the ends. Whether it's being used in manufacturing or retrofitted, the application is much easier and faster. It even works if the slot is slightly off size. Zipper Pile can be used to retrofit aluminum, vinyl, fiberglass or wood T-slots without the need to take the complete window or door sash apart. The double center fin provides a true weather seal, compared to other piles without a fin suited for vibration reduction and pest control only.

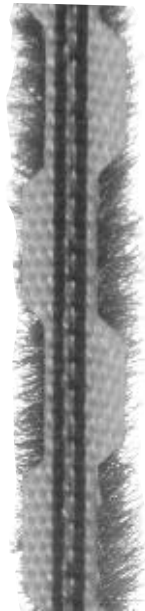

Zipper Tooth Backing Design

Solid Barrier "Double" Center Fin

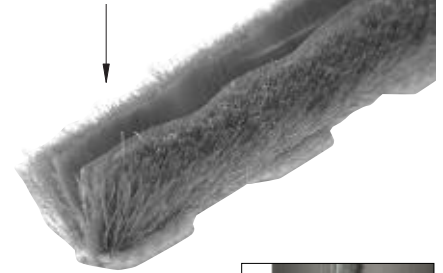

new

Typical installation in door stile



EASY INSTALLATION



New Pile is easy to install



Remove old Pile from frame




Press new Zipper Pile into groove with finger



Cut to length with knife or scissors

100 FT. ROLL CAT. NO.	BACKING WIDTH (W)	PILE HEIGHT (H)	BULK ROLL CAT. NO.	BULK ROLL LENGTH
Z78137C	.187" (4.7 mm)	.160" (4 mm)	Z78148B	3,000' (914.4 m)
Z78159C	.187" (4.7 mm)	.200" (5.1 mm)	Z78161B	1,100' (335.3 m)
Z78172C	.187" (4.7 mm)	.250" (6.3 mm)	Z78183B	900' (274.3 m)
Z78194C	.187" (4.7 mm)	.300" (7.6 mm)	Z78205B	700' (213.4 m)
Z78216C	.187" (4.7 mm)	.350" (8.9 mm)	Z78227B	600' (182.9 m)
Z78238C	.187" (4.7 mm)	.400" (10.2 mm)	Z78249B	500' (152.4 m)
Z78251C	.187" (4.7 mm)	.450" (11.4 mm)	Z78262B	400' (121.9 m)
Z78273C	.270" (6.8 mm)	.200" (5.1 mm)	Z78284B	800' (243.8 m)
Z78295C	.270" (6.8 mm)	.250" (6.3 mm)	Z78306B	600' (182.9 m)
Z78317C	.270" (6.8 mm)	.300" (7.6 mm)	Z78328B	400' (121.9 m)
Z78339C	.270" (6.8 mm)	.350" (8.9 mm)	Z78349B	400' (121.9 m)
Z78352C	.270" (6.8 mm)	.400" (10.2 mm)	Z78363B	300' (91.4 m)
Z78374C	.270" (6.8 mm)	.450" (11.4 mm)	Z78385B	300' (91.4 m)
Z78396C	.360" (9.1 mm)	.350" (8.9 mm)	Z78407B	300' (91.4 m)
Z78418C	.360" (9.1 mm)	.450" (11.4 mm)	Z78429B	300' (91.4 m)
Z78431C	.430" (10.9 mm)	.350" (8.9 mm)	Z78442B	300' (91.4 m)
Z78453C	.430" (10.9 mm)	.450" (11.4 mm)	Z78464B	300' (91.4 m)

Minimum order: 1 roll. 100 foot rolls can be combined with all other 100 foot rolls of Pile for quantity pricing. Bulk rolls can be combined with all other bulk rolls of Pile for quantity pricing.




Comes in handy 100 foot rolls as well as cost-saving bulk rolls.


CRL Storefront Door Pile Weatherstrip

- **Energy Saver – Reduces Heat and Air Conditioning Loss Around Storefront Doors**
- **Effectively Seals Without Affecting the Operation of the Door**
- **Used on U.S. Aluminum Doors**

This CRL Storefront Door Pile Weatherstrip is made of water-repellent pile woven onto a polypropylene backing strip, which inserts easily into the pile channel of commercial doors. Pile Weatherstrip helps keep heated or cooled air from escaping around the door's frame, thus reducing energy loss. It will not affect the normal operation of the door. The black color will match the finish of most commercial doors.



new




100 FT. ROLL CAT. NO.	PILE HEIGHT (H)	BULK ROLL CAT. NO.	BULK ROLL LENGTH
W125C	.250" (6.3 mm)	W125B	2000' (609.6 m)
W188C	.313" (7.9 mm)	W188B	1800' (548.6 m)

Minimum order: 1 roll. 100 foot rolls can be combined with all other 100 foot rolls of Windo-Pile for quantity pricing. Bulk rolls can be combined with all other bulk rolls of Pile for quantity pricing.


CRL Adjustable Astragal Replacement Pile Weatherstrip

- **Designed to Replace Worn Weatherstrip Pile on Adjustable Astragals**
- **Weatherstrip Minimizes Air, Water, and Dust From Infiltrating Between Pairs of Doors**
- **Resists Mold, Mildew, and Corrosion**
- **Used on U.S. Aluminum Doors**

This CRL Pile Weatherstrip maximizes the energy efficient qualities of fiber pile by adding a dual barrier. The weatherstrip minimizes air, dust, and insects from infiltrating the center of doors that use our Adjustable Astragal. The polypropylene black fiber pile resists mold, mildew, and corrosion, and has exceptional resistance to abrasion. It is silicone treated to repel water, and stabilized against ultraviolet and ozone. This Weatherstrip is installed by simply sliding it into the pile channel of the existing CRL Adjustable Astragal.



new

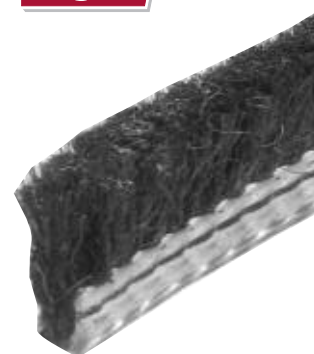



100 FT. ROLL CAT. NO.	PILE HEIGHT (H)	BULK ROLL CAT. NO.	BULK ROLL LENGTH
W510C	.375" (9.5 mm)	W510B	2000' (609.6 m)

Minimum order: 1 roll. 100 foot rolls can be combined with all other 100 foot rolls of Windo-Pile for quantity pricing. Bulk rolls can be combined with all other bulk rolls of Pile for quantity pricing.

CRL Vanguard Security Astragal Replacement Pile Weatherstrip

- **Stops Air, Water, and Dust From Infiltrating the Joint Between Pairs of Doors**
- **Designed to Replace Worn Pile Weatherstrips on U.S. Aluminum Doors With Vanguard Security Astragals**
- **Resists Mold, Mildew, and Corrosion**

This CRL Pile Weatherstrip is installed by simply sliding it into the pile channel of the existing U.S. Aluminum Vanguard Security Astragal frame. The polypropylene black fiber pile resists mold, mildew, and corrosion, and has exceptional resistance to abrasion. It is silicone treated to repel water, and stabilized against ultraviolet and ozone. The backing strip is polypropylene and lasts longer than plastic weatherseals.



new






100 FT. ROLL CAT. NO.	PILE HEIGHT (H)	BULK ROLL CAT. NO.	BULK ROLL LENGTH
W562C	.625" (15.9 mm)	W562B	1500' (457.2 m)

Minimum order: 1 roll. 100 foot rolls can be combined with all other 100 foot rolls of Windo-Pile for quantity pricing. Bulk rolls can be combined with all other bulk rolls of Pile for quantity pricing.

CRL Storefront Door Pile Weatherstrip

- Energy Saver – Reduces Heat and Air Conditioning Loss Around Storefront Doors
- Effectively Seals Without Affecting the Operation of the Door

This CRL Storefront Door Pile Weatherstrip is made of water-repellent pile woven onto a polypropylene backing strip, which inserts easily into the pile channel of commercial doors. Pile weatherstrip helps keep heated or cooled air from escaping around the door's frame, thus reducing energy loss. It will not affect the normal operation of the door. The medium gray color will match the finish of most commercial doors. Available in 100 foot (30.5 m) or 300 foot (91.4 m) rolls.

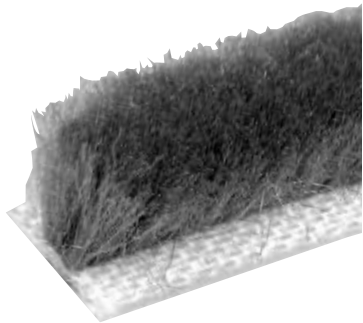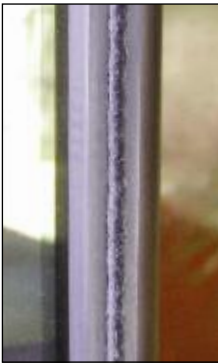




100 FT. ROLL CAT. NO.	300 FT. ROLL CAT. NO.	PILE HEIGHT (H)	BACKING WIDTH (W)
A11535C	A11535B	.350" (8.9 mm)	.350" (8.9 mm)
A11545C	A11545B	.450" (11.4 mm)	.350" (8.9 mm)
A11635C	A11635B	.350" (8.9 mm)	.437" (11.1 mm)
A11645C	A11645B	.450" (11.4 mm)	.437" (11.1 mm)

Minimum order: 1 roll. 100 foot rolls can be combined with all other 100 foot rolls of Windo-Pile for quantity pricing. Bulk rolls can be combined with all other bulk rolls of Windo-Pile for quantity pricing.

CRL Finned Weatherstrip

- Unique Center Fin Stops Air, Water, and Dust From Infiltrating Joints Around Windows and Doors
- Made to Replace Most Existing Pile Weatherstrips
- Resists Mold, Mildew, and Corrosion


This CRL Finned Weatherstrip maximizes the energy efficient qualities of fiber pile by adding a patented, solid barrier fin. The center fin stops air, water, dust, and insects from infiltrating cracks around windows and doors that use pile weatherstripping. The polypropylene gray fiber pile resists mold, mildew, and corrosion, and has exceptional resistance to abrasion. It is silicone treated to repel water, and stabilized against ultraviolet and ozone. The backing strip is polypropylene and lasts longer than plastic weatherseals. CRL Finned Weatherstrip will replace approximately 90% of the existing storm window pile weatherstrips made, and is installed by simply snapping it into the pile channel of the existing frame.



CAT. NO.	PILE HEIGHT (H)	BACK WIDTH (W)	ROLL LENGTH
FS7716C	.160" (4 mm)	.187" (4.7 mm)	100' (30.5 m)
FS77163M	.160" (4 mm)	.187" (4.7 mm)	3000' (914.4 m)

Minimum order: 1 roll. 100 foot rolls can be combined with all other 100 foot rolls of Windo-Pile for quantity pricing. Bulk rolls can be combined with all other bulk rolls of Windo-Pile for quantity pricing.

CRL Door Jamb Dust Pads



- Adhesive Backing Allows Press-On Installation
- Seals Door Corners

These CRL Door Jamb Dust Pads are made of woven pile on a polypropylene fin with a pressure-sensitive adhesive backing. The Pad is applied to the door jamb above the rubber threshold, which helps seal the door corners against dirt and dust. 10 pads per package.

CAT. NO.	COLOR	QTY/PKG
PDP1W	White	10
PDP1BL	Black	10

Minimum order: 10 each of one color. Must be ordered in increments of 10. Colors can be combined for quantity pricing.


CRL Adhesive-Backed Windo-Pile

- Reduces Heat and Energy Loss Around Windows and Doors
- Adhesive Backing Allows Press-On Installation
- Seals Effectively Without Affecting Operation

This CRL Adhesive-Backed Windo-Pile is a water-resistant pile woven with silicone treated polypropylene fibers to resist mold, corrosion, abrasion, and is stabilized against ultraviolet and ozone. The fibers are attached to a polypropylene backing that lasts longer than plastic weatherseals, and has a pressure-sensitive adhesive with a release liner. Especially good for applications on irregular surfaces, helping the weatherstrip conform to surface contours. Helps conserve energy by keeping windows and doors sealed. The color of the pile is light gray.



Effectively seals double hung and horizontal sliding windows. Simply press Windo-Pile into the window sash channels. Doesn't interfere with normal window operation.

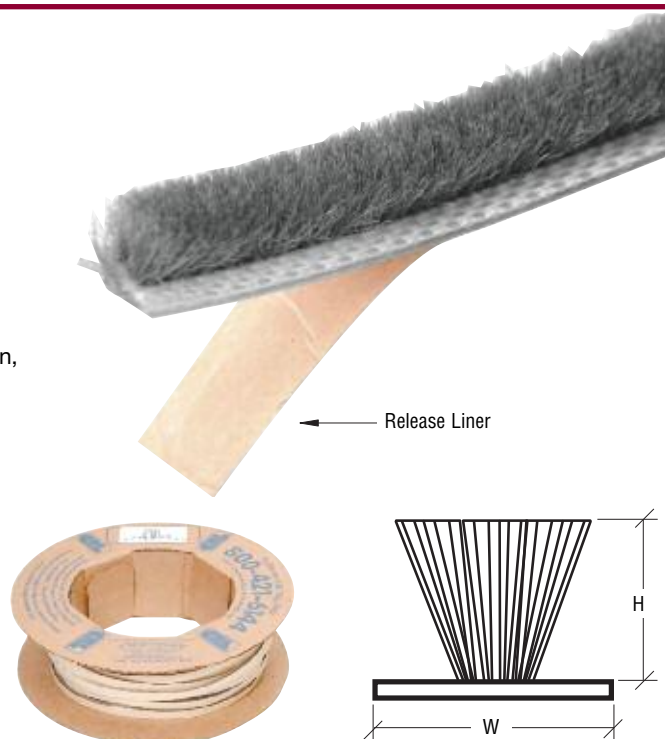


CAT. NO.	PILE HEIGHT (H)	BACK WIDTH (W)	ROLL LENGTH
A1875C	.200" (5.1 mm)	.187" (4.7 mm)	100' (30.5 m)
A1875B	.200" (5.1 mm)	.187" (4.7 mm)	1100' (335.5 m)
A71320C	.200" (5.1 mm)	.270" (6.8 mm)	100' (30.5 m)
A71320B	.200" (5.1 mm)	.270" (6.8 mm)	700' (213.3 m)

Minimum order: 1 roll. 100 foot rolls can be combined with all other 100 foot rolls of Windo-Pile for quantity pricing. Bulk rolls can be combined with all other bulk rolls of Windo-Pile for quantity pricing.

CRL Windo-Pile

- Replaces Old or Worn-Out Pile Weatherstripping in Doors or Windows
- Water-Resistant Woven Pile is Unaffected by Adverse Weather
- Quick and Simple Installation
- Available in Two Pile Densities: Medium and High



MEDIUM DENSITY WINDO-PILE BACK WIDTH .187" (4.7 MM)

100 FT. ROLL CAT. NO.	PILE HEIGHT (H)	BULK ROLL CAT. NO.	BULK ROLL LENGTH
A11320C	.200" (5.1 mm)	A11320B	1100' (335.3 m)
A11325C	.250" (6.3 mm)	A11325B	900' (274.3 m)
A11330C	.300" (7.6 mm)	A11330B	700' (213.4 m)
A11335C	.350" (8.9 mm)	A11335B	600' (182.9 m)

HIGH DENSITY WINDO-PILE BACK WIDTH .270" (6.8 MM)

100 FT. ROLL CAT. NO.	PILE HEIGHT (H)	BULK ROLL CAT. NO.	BULK ROLL LENGTH
A11420C	.200" (5.1 mm)	A11420B	800' (243.8 m)
A11425C	.250" (6.3 mm)	A11425B	600' (182.9 m)
A11430C	.300" (7.6 mm)	A11430B	400' (121.9 m)
A11435C	.350" (8.9 mm)	A11435B	400' (121.9 m)

Minimum order: 1 roll. 100 foot rolls can be combined with all other 100 foot rolls of Windo-Pile for quantity pricing. Bulk rolls can be combined with all other bulk rolls of Windo-Pile for quantity pricing.

CRL Windo-Pile is specifically made to meet the needs of anyone looking for quality replacement pile weatherstripping. A water-resistant pile woven to a polypropylene backing, with a choice of medium and high densities, it can replace approximately 90% of the worn-out or corroded pile in use in existing windows and doors. It installs easily, and seals effectively. It also can be used in the fabrication of new storm windows. The pile is a light gray color.

CRL Translucent Bulb Seal

- Two Sizes Available, With or Without Very Hi-Bond Acrylic Tape Pre-Applied



CRL Translucent Vinyl Bulb Seals can be used on inswing or outswing doors. SDTB closes gaps from 5/32" to 7/32" (4 to 5.6 mm); SDTJ closes gaps from 1/8" to 5/32" (3.2 to 4 mm). Available with or without Very Hi-Bond Acrylic Tape pre-applied. For additional information on Tapes, see below.

W/O TAPE CAT. NO.	WITH TAPE CAT. NO.	MAX. GAP	LENGTH
SDTJ	SDTJT2	5/32" (4 mm)	98" (2.49 m)
SDTB	SDTBT2	7/32" (5.6 mm)	98" (2.49 m)

Minimum order: 5 each. Must be ordered in increments of 5. Packing Charge added to orders of fewer than 10 lengths.

CRL Clear Polycarbonate Wipe With Pile Weatherstrip

- Eliminates Drafts Between Doors



This CRL Clear Polycarbonate with Pile Weatherstrip prevents drafts from entering between glass doors. Simply snap over the edge of 1/2" (12 mm) glass. No tools required to install. Recommended clearance is 5/16" to 3/8" (8 to 10 mm). Stock lengths measure 98" (2.49 m) and can be shipped U.P.S.

CAT. NO.	LENGTH
CW12	98" (2.49 m)

Minimum order: 1 each.

CRL Transparent Acrylic Very Hi-Bond Adhesive Tape

- Gains Full Strength Over a 72 Hour Period
- Available in Two Widths

CRL Very Hi-Bond Transparent Double-Sided Acrylic Tape is used to attach Pile Weatherstrips to the Door Rail. This Tape possesses a uniform high-tack acrylic adhesive on both surfaces, and will bond to most clean, dry, oil-free substrates. It is non-staining after aged contact, has a solid composition for clean cutting, and is flexible, moldable and compressible, so it can conform to intricate shapes.

Used to replace mechanical fasteners and welds, and wherever a waterproof bond in a wide range of temperature conditions exists.



1/2" Width in .040" Thickness
1/4" Width in .020" and .040" Thicknesses

CAT. NO.	WIDTH	THICKNESS	ROLL LENGTH
AT02014	1/4" (6 mm)	.020" (.51 mm)	216' (66 m)
AT0201436	1/4" (6 mm)	.020" (.51 mm)	36' (11 m)
AT04014	1/4" (6 mm)	.040" (1.02 mm)	108' (33 m)
AT0401436	1/4" (6 mm)	.040" (1.02 mm)	36' (11 m)
AT04012	1/2" (12 mm)	.040" (1.02 mm)	108' (33 m)
AT0401236	1/2" (12 mm)	.040" (1.02 mm)	36' (11 m)

Minimum order: 1 roll. Sizes can be combined for quantity pricing.

CRL Translucent Acrylic Very Hi-Bond Adhesive Tape

- Instant Pressure Sensitive Bonding for Weatherstrips and Seals



- Available in Four Widths



Ideal for the installation of Bulb Seals and Pile Weatherstrips, our Translucent Acrylic Double-Sided Very Hi-Bond Adhesive Tape is designed for a variety of applications including window grids, furniture, appliances, auto trim attachment, signs, graphics, construction uses to replace mechanical fasteners and welds, and whenever a waterproof bond in a wide range of temperature conditions exists.

CAT. NO.	WIDTH	THICKNESS	ROLL LENGTH
AT04512	1/2" (12 mm)	.045" (1.2 mm)	108' (33 m)
AT04534	3/4" (19 mm)	.045" (1.2 mm)	108' (33 m)
AT0451	1" (25 mm)	.045" (1.2 mm)	108' (33 m)
AT0452	2" (51 mm)	.045" (1.2 mm)	108' (33 m)

Minimum order: 1 roll. Sizes can be combined for quantity pricing.

CRL Self-Adhesive Weatherstrip

- Made of Santoprene® in Three Colors
- Available in 17, 100, and 500 Foot Rolls



Applied to a Door Jamb



Compresses When Door is Closed

CRL Self-Adhesive Weatherstrip is designed to be applied to the "stop" perimeter of a frame to prevent energy loss, reduce noise and dust infiltration. It will not crack or craze in cold or heat. Self-adhesive application makes installation easy and requires only scissors or a utility knife to cut to size. Tested in accordance with ASTM E-283 and listed by Warnock Hersey for use on labeled openings up to 90 minutes.

PACKAGED WEATHERSTRIP

100 FOOT (30.5 M) CAT. NO.	17 FOOT (5.2 M) CAT. NO.	COLOR
SW250BLC	SW250BL17	Black
SW250WC	SW250W17	White
SW250BRC	SW250BR17	Brown

Minimum order: 1 roll. All Self-Adhesive Weatherstrip can be combined for quantity pricing.


BULK WEATHERSTRIP

CAT. NO.	ROLL LENGTH	COLOR
SW250BLB	500' (152.4 m)	Black
SW250WB	500' (152.4 m)	White
SW250BRB	500' (152.4 m)	Brown

Minimum order: 1 roll. All Self-Adhesive Weatherstrip can be combined for quantity pricing.

CRL Polyflex Weatherstrip


- Reduces Air Infiltration
- Adhesive Backed for Fast Installation
- Works With Wood and Metal Door Frames



Black



White

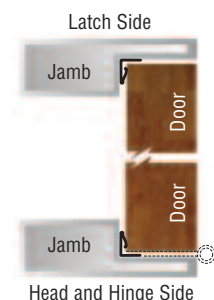

Head and Hinge Side




CRL Polyflex Weatherstrip can act as a wipe or compression seal to eliminate water leaks, and virtually stop air infiltration around doors. The copolymer material won't absorb water, corrode, rot, shrink, stiffen or crack, even at temperatures as low as -25°F (-32°C). With Polyflex Weatherstrip there is no need to remove old metal weatherstripping, just cut to size with scissors and press in place. It fits into the right angle formed by the door jamb and stop, so it's hidden from sight when the door is closed. Packaged in sets of three each 84" (2133 mm) pieces to fit most door openings.

CAT. NO.	COLOR
PF114BL	Black
PF114W	White

Minimum order: 1 set. Colors can be combined for quantity pricing.


CRL Foam-Tite® Weatherseal

- For Wood or Metal Kerf Doors
- High Durability



Bronze

White



CRL Foam-Tite® Weatherseal is a compression seal for kerf-fitted wood or metal doors and French Style doors. It efficiently restricts air, light, water, and sound infiltration. Its closed cell foam profile remains flexible through thousands of compressions, while the embossed vinyl surface provides easy breakaway and ensures long life. The rigid dual-locking barbs fit standard 1/8" x 3/8" (3.2 x 9.5 mm) kerfs, insert easily, and hold securely without slipping.

CAT. NO.	COLOR	LENGTH
FT81B	Bronze	84" (2133 mm)
FT81W	White	84" (2133 mm)


Minimum order: 10 each per color. Colors can be combined for quantity pricing.

Santoprene is a registered trademark of Exxon Mobil Corporation.


Foam-Tite is a registered trademark of Amesbury Group, Inc.

CRL V-Seal Weatherstrip Tape

- Self-Adhesive Tape Seals Gaps Up to 3/8" (9.5 mm)



CRL V-Seal is a flexible, compressible weatherstrip which seals against air, dust, and sound infiltration on swinging doors. It remains flexible in all types of weather. Simply cut to length, peel off the backing paper to expose the adhesive, and apply to jamb stop.



CAT. NO.	COLOR	ROLL LENGTH
P39C180	Clear	180' (54.9 m)


Minimum order: 1 roll.

CRL Finned Door Sweep and Weatherstrip

- Incorporates Advanced Finned Technology
- Keeps Out Air, Water, Dust, and Insects
- Silicone Treated Pile Won't Rot, Shrink or Absorb Water
- Helps Reduce Noise Infiltration

CRL Finned Door Sweep and Weatherstrip stops air, water, dust, and insects from entering. It combines advanced energy saving finned technology with a strip of anodized aluminum to create the most energy cost reducing product of its kind. The 5/16" (7.9 mm) high silicone treated pile will not shrink, rot or absorb water, and its low friction sealing action allows for minimum drag during opening or closing.

Finned Door Sweeps positively stop water and air leakage without marking the lightest carpets or floors. Installs on exterior or interior bottom of door with screws in pre-punched slots to allow for clearance adjustment. Also can be installed around doors on top and side jamb stops, where air infiltration is a particular problem.

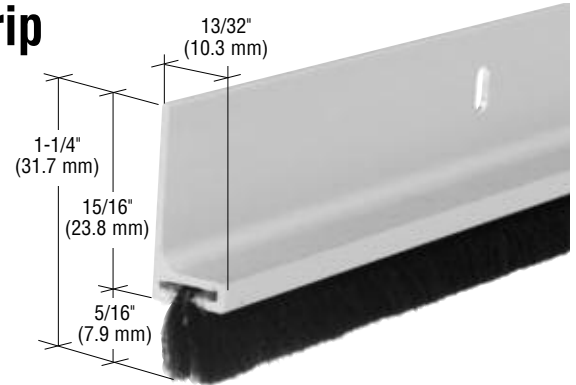

Door Bottom Installation

Door Jamb Installation



CAT. NO.	FINISH	LENGTH
FS77A	Satin Anodized	12' (3.66 m)
FS77BRZ	Medium Bronze Painted	12' (3.66 m)

Minimum order: 1 each. Finishes can be combined for quantity pricing. A Packing Charge will be added to orders of fewer than 10 combined lengths. Stock lengths longer than 108" (2.74 m) must ship common carrier, unless you specify we cut them for U.P.S. A Cutting Charge will apply.

CRL Extruded Aluminum and Nylon Brush Door Sweep

- Flexible Bristles in a Choice of Three Lengths Allow a Seal on Even or Uneven Surfaces

new

This CRL Extruded Aluminum and Nylon Brush Door Sweep is designed to be applied to the "stop" perimeter of a frame to prevent energy loss and reduce noise infiltration. This Weatherstrip uses thousands of flexible bristles allowing a seal on uneven and even surfaces. Bristles are available in 11/32" (8.7 mm), 5/8" (15.9 mm), and 3/4" (19 mm) lengths. Supplied with screws for easy installation.

11/32" BRISTLE CAT. NO.	5/8" BRISTLE CAT. NO.	3/4" BRISTLE CAT. NO.	FINISH	LENGTH
WS257AV72	WS377AV72	WS497AV72	Aluminum	72" (1829 mm)
WS257DV72	WS377DV72	WS497DV72	Dark Bronze Anodized	72" (1829 mm)
WS257AV96	WS377AV96	WS497AV96	Aluminum	96" (2438 mm)
WS257DV96	WS377DV96	WS497DV96	Dark Bronze Anodized	96" (2438 mm)

Minimum order: 1 each. Sizes and finishes can be combined for quantity pricing.




CRL Aluminum and Vinyl Door Sweep

- Extruded Aluminum With 1" (25.4 mm) Vinyl Sweep
- Available in Two Finishes and Two Sizes

This CRL Aluminum and Vinyl Door Sweep is designed to prevent dust, moisture, and wind from entering between the base of the door and the threshold. They are sized for 36" (914 mm) or 48" (1219 mm) openings. Sweep is supplied with screws for easy installation.

CAT. NO.	FINISH	LENGTH
DB005AV36	Aluminum	36-1/2" (927 mm)
DB005DV36	Dark Bronze Anodized	36-1/2" (927 mm)
DB005AV48	Aluminum	48" (1219 mm)
DB005DV48	Dark Bronze Anodized	48" (1219 mm)


Minimum order: 1 each. Sizes and finishes can be combined for quantity pricing.

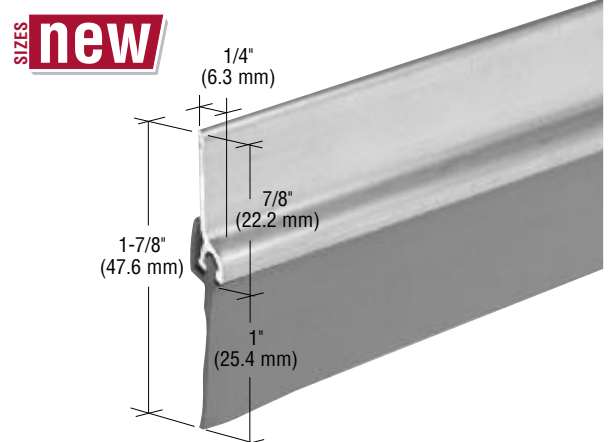

CRL Aluminum Door Sweep

• Universal Design in Three Popular Finishes

These CRL Aluminum Door Sweeps offer the most weatherstrip for the money. A full 1-5/8" (41.3 mm) height fills even the largest under-door gaps, and the 36" (914 mm) length fits most standard doors. The Sweep is constructed of sturdy extruded aluminum with a locked-in flexible vinyl wipe. Slotted holes allow easy adjustment.

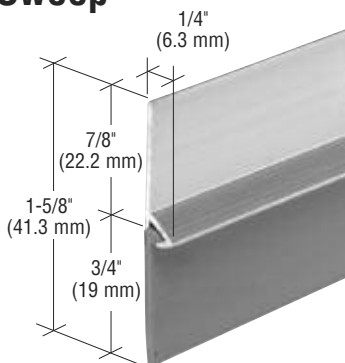


CAT. NO.	FINISH	LENGTH
DS37A	Aluminum	36" (914 mm)
DS37BRW	Dark Bronze Anodized	36" (914 mm)
DS37W	White	36" (914 mm)

Minimum order: 10 each of one finish. Finishes can be combined for quantity pricing.

CRL Aluminum and Rubber Door Sweep

• Stiff EPDM Rubber Sweep

This CRL Aluminum and Rubber Door Sweep is designed to prevent dust, moisture, and wind from entering between the base of the door and the threshold. Supplied with screws for easy installation.

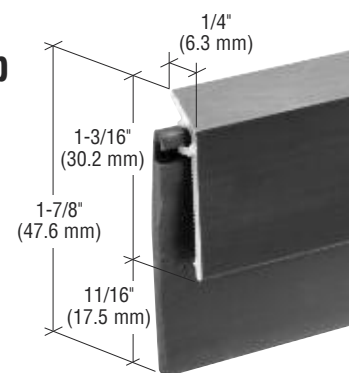


CAT. NO.	FINISH	LENGTH
DB062AV36	Aluminum	36-1/2" (927 mm)
DB062DV36	Dark Bronze Anodized	36-1/2" (927 mm)
DB062AV48	Aluminum	48" (1219 mm)
DB062DV48	Dark Bronze Anodized	48" (1219 mm)

Minimum order: 1 each. Finishes can be combined for quantity pricing.

CRL Aluminum and Neoprene Door Sweep

• 60 Durometer Neoprene Sweep

This CRL Aluminum Door Sweep has a stiff neoprene black sweep to create a good seal with the door sill or threshold. Pre-drilled with mounting screws included.

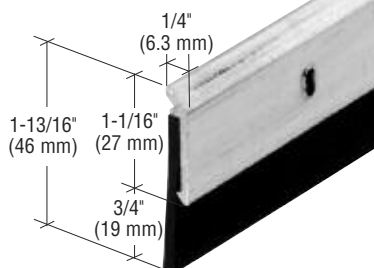


CAT. NO.	FINISH	LENGTH
33N1A36	Aluminum	36" (914 mm)
33N1D36	Dark Bronze Anodized	36" (914 mm)
33N1A48	Aluminum	48" (1219 mm)
33N1D48	Dark Bronze Anodized	48" (1219 mm)

Minimum order: 1 each. Finishes can be combined for quantity pricing.

CRL Triple Fin Vinyl Door Sweep

• Triple Fin Design Gives Added Protection

This CRL Triple Fin Vinyl Door Sweep is designed to prevent dust, moisture, and wind from entering between the base of the door and the threshold. The triple fin design gives added protection against drafts and moisture. Supplied with screws for easy installation.

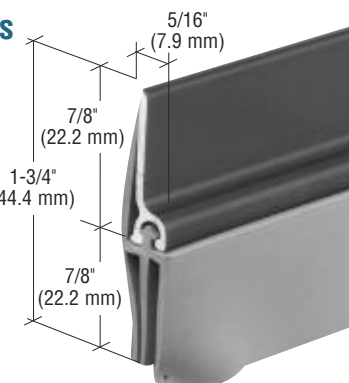


CAT. NO.	FINISH	LENGTH
DB041AV36	Aluminum	36-1/2" (927 mm)
DB041DV36	Dark Bronze Anodized	36-1/2" (927 mm)

Minimum order: 1 each. Finishes can be combined for quantity pricing.

CRL Heavy-Duty Door Sweep

• 60 Durometer Neoprene Sweep • Available in Two Lengths in Aluminum and Dark Bronze Anodized Finishes

This CRL Heavy-Duty Door Sweep is most commonly used on the exterior bottom of out-swing doors and is surface applied. It may also be used for different applications including meeting stile gasketing. Pre-drilled with mounting screws included.

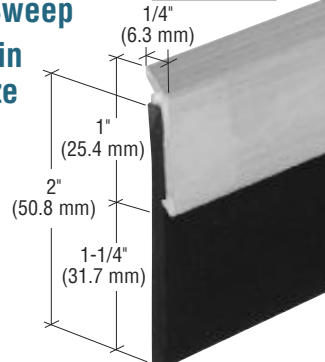


CAT. NO.	FINISH	LENGTH
33N2A36	Aluminum	36" (914 mm)
33N2D36	Dark Bronze Anodized	36" (914 mm)
33N2A48	Aluminum	48" (1219 mm)
33N2D48	Dark Bronze Anodized	48" (1219 mm)

Minimum order: 1 each. Sizes and finishes can be combined for quantity pricing.

CRL Aluminum Entrance Door Sweep

• Extruded Aluminum With Concealed Fasteners

This CRL Aluminum Entrance Door Sweep is designed with an extruded aluminum slide cover that conceals the fasteners and provides clean lines. The Sweep is pre-slotted and supplied with screws for easy installation.

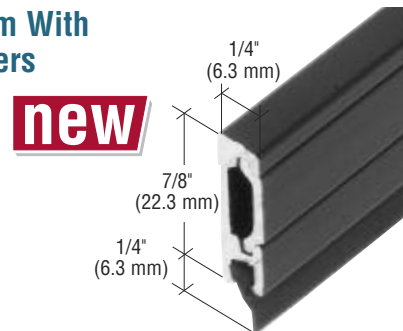


CAT. NO.	FINISH	LENGTH
BW03611	Clear Anodized	36" (914 mm)
BW03622	Dark Bronze Anodized	36" (914 mm)
BW04211	Clear Anodized	42" (1067 mm)
BW04222	Dark Bronze Anodized	42" (1067 mm)
BW04811	Clear Anodized	48" (1219 mm)
BW04822	Dark Bronze Anodized	48" (1219 mm)

Minimum order: 1 each. Sizes and finishes can be combined for quantity pricing.

CRL Extruded Aluminum and Vinyl Bulb Weatherseal

- Extruded Aluminum With Jamb-Applied Vinyl Bulb

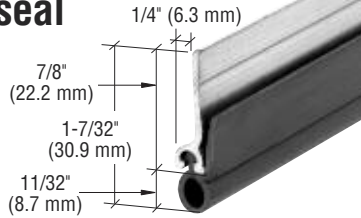


This CRL Extruded Aluminum and Vinyl Bulb Weatherseal is designed to be applied to the "stop" perimeter of the door frame to prevent energy loss and reduce noise infiltration. It is sold in a set of three pieces to fit standard single and double door openings, and is supplied with screws for easy installation.

CAT. NO.	FINISH	SIZE
WS003AV196	Aluminum	36" x 80" (914 x 2032 mm)
WS003DV196	Dark Bronze Anodized	36" x 80" (914 x 2032 mm)
WS003AV232	Aluminum	72" x 80" (1829 x 2032 mm)
WS003DV232	Dark Bronze Anodized	72" x 80" (1829 x 2032 mm)

Minimum order: 1 each. Sizes and finishes can be combined for quantity pricing.

CRL Vinyl Bulb Seal Door Jamb Weatherstrip

- High Quality Durable Extruded Aluminum With Locked-In Tubular Vinyl Seal

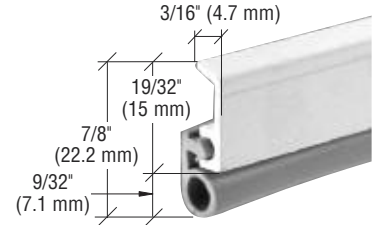


This CRL Vinyl Bulb Seal Door Jamb Weatherstrip set works effectively on either wood or metal doors in keeping the heat in and drafts and dust out. This long lasting gray Weatherstrip is unaffected by weather and requires no maintenance. Each set contains three pieces to fit a standard single door opening. Installation screws are provided.

CAT. NO.	FINISH	SIZE
DW950A	Aluminum	36" x 84" (914 x 2133 mm)
DW950W	White	36" x 84" (914 x 2133 mm)

Minimum order: 1 each. Finishes can be combined for quantity pricing.

CRL Extruded Aluminum Weatherseal With Triple Finger Vinyl

- Fits Single and Double Openings




This CRL Triple Finger Vinyl Weatherseal is designed to be applied to the "stop" perimeter of the door frame to prevent energy loss and reduce noise infiltration. It is sold in a set of three pieces to fit standard single and double door openings. Supplied with screws for easy installation. It may be trimmed for a perfect fit.

CAT. NO.	FINISH	SIZE
WS167AV196	Aluminum	36" x 80" (914 x 2032 mm)
WS167DV196	Dark Bronze Anodized	36" x 80" (914 x 2032 mm)
WS167AV232	Aluminum	72" x 80" (1829 x 2032 mm)
WS167DV232	Dark Bronze Anodized	72" x 80" (1829 x 2032 mm)

Minimum order: 1 each. Sizes and finishes can be combined for quantity pricing.

CRL Combination Door Sweep

- Extruded Aluminum Rain Drip and Vinyl Door Sweep



The CRL Combination Door Sweep has a "rain drip" feature which deflects rain away from the base of the door, as well as preventing dust, moisture, and wind from entering between the base of the door and the threshold. Supplied with screws for easy installation.


CAT. NO.	FINISH	LENGTH
DB037AV36	Aluminum	36-1/2" (927 mm)
DB037DV36	Dark Bronze Anodized	36-1/2" (927 mm)

Minimum order: 1 each. Finishes can be combined for quantity pricing.

CRL Rain Drip Door Sweep

- Seals Against Drafts and Deflects Rain

The CRL Rain Drip Door Sweep deflects rain away from the base of the door, as well as preventing dust, moisture, and wind from entering between the base of the door and the threshold. Supplied with screws for easy installation.



CAT. NO.	FINISH	LENGTH
152VA36	Aluminum	36" (914 mm)
152VD36	Dark Bronze Anodized	36" (914 mm)

Minimum order: 1 each. Finishes can be combined for quantity pricing.



**OVER 60,000
PRODUCTS
AT YOUR
FINGERTIPS,
INSTANTLY,
AND AT
ANY TIME**

The C.R. Laurence Online Catalog is the most comprehensive source of Glazing, Screen, Architectural, Railing, Construction, Industrial, and Automotive Supplies. Access any product online and find related items, technical information, quantity in stock, pricing, and even place an order. crlaurence.com is the fastest way to get what you need to get the job done.


CRL "U" Shape Door Bottoms

new

- For 1-3/4" (44.4 mm) Doors
- "Drip Cap" Diverts Rain From the Door
- Vinyl Seal Keeps Out Weather

This CRL "U" Shaped Door Bottom features an aluminum "drip cap" that diverts rain away from the door. It can be used with saddle thresholds and includes a vinyl insert for weather sealing.

Models with 1/2" (12.7 mm) wide full notch fabrication are available in order to prevent interference with door stops and weatherstrips. Slots are drilled for the supplied #6 x 1/2" pan head screws.

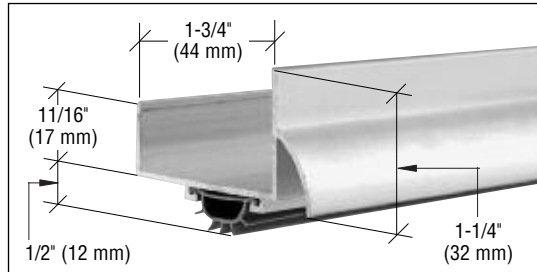

CAT. NO.	FINISH	LENGTH	WITH FULL NOTCH
17VRA32	Aluminum	31-3/4" (806 mm)	NO
17VRD32	Dark Bronze Anodized	31-3/4" (806 mm)	NO
17VRA36	Aluminum	35-3/4" (908 mm)	NO
17VRD36	Dark Bronze Anodized	35-3/4" (908 mm)	NO
17VRFNA36	Aluminum	35-3/4" (908 mm)	YES
17VRFND36	Dark Bronze Anodized	35-3/4" (908 mm)	YES
17VRA48	Aluminum	47-3/4" (1213 mm)	NO
17VRD48	Dark Bronze Anodized	47-3/4" (1213 mm)	NO

Minimum order: 1 each. Finishes can be combined for quantity pricing.


CRL "L" Shape Door Bottoms

new

- Built-In Rain Drip
- Installs Without Door Removal
- Available With Full Notch

Our CRL "L" Shaped Door Bottom features slotted holes for easy adjustment. The durable vinyl seal compresses as the door is closed to seal off the outside elements.

Models with 1/2" (12.7 mm) wide full notch fabrication are available in order to prevent interference with door stops and weatherstrips. Slots are drilled for the supplied #6 x 1/2" pan head screws.

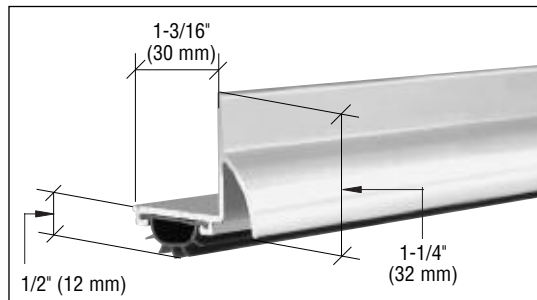

CAT. NO.	FINISH	LENGTH	WITH FULL NOTCH
18VRA36	Aluminum	35-3/4" (908 mm)	NO
18VRD36	Dark Bronze Anodized	35-3/4" (908 mm)	NO
18VRFNA36	Aluminum	35-3/4" (908 mm)	YES
18VRFND36	Dark Bronze Anodized	35-3/4" (908 mm)	YES
18VRA48	Aluminum	47-3/4" (1213 mm)	NO
18VRD48	Dark Bronze Anodized	47-3/4" (1213 mm)	NO


Minimum order: 1 each. Finishes can be combined for quantity pricing.

CRL Door Rain Drips

new

- Easy to Install Weather Protection

CRL Door Rain Drips can also be used as weatherstrip rain drips for mounting on frame at top of door. Slots are drilled for the supplied #6 x 1/2" pan head screws.

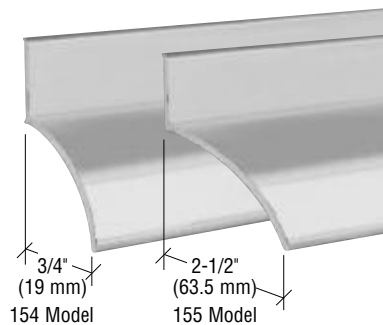

CAT. NO.	FINISH	LENGTH
154A36	Aluminum	36" (914 mm)
154D36	Dark Bronze Anodized	36" (914 mm)
155A36	Aluminum	36" (914 mm)
155D36	Dark Bronze Anodized	36" (914 mm)
155A72	Aluminum	72" (1829 mm)
155D72	Dark Bronze Anodized	72" (1829 mm)


Minimum order: 1 each. Finishes and sizes can be combined for quantity pricing.

CRL Wrap Around Door Shoe With Vinyl Weatherstrip

new

- For 1-3/4" (44.4 mm) Doors
- Two Heights Available

Designed for doors that have been undercut too much, or where you must reduce the height of the threshold. The door does not have to be removed for installation. Vinyl fingers on the bottom insert compress against the threshold to ensure a water and air tight seal. Screws are included for easy installation.




CAT. NO.	FINISH	HEIGHT "H"	LENGTH
22VRA36	Aluminum	1" (25.4 mm)	36" (914 mm)
22VRD36	Dark Bronze Anodized	1" (25.4 mm)	36" (914 mm)
DB054AV36	Aluminum	3" (76.2 mm)	36-1/2" (927 mm)
DB054DV36	Dark Bronze Anodized	3" (76.2 mm)	36-1/2" (927 mm)

Minimum order: 1 each. Finishes can be combined for quantity pricing.

CRL Commercial Medium-Duty Surface Mount Automatic Door Bottom

- Field Reversible


This CRL Commercial Medium-Duty Automatic Door Bottom is mechanically actuated. An internal carrier bar with a vinyl insert drops from a concealed cavity to form a tight seal between the base of the door and the threshold. It is ideal for use where carpeted interiors require the door bottom to retract when the door is opened. Supplied with a frame "actuator" protector plate, the door bottom is field reversible for either "hand" of door.



CRL Commercial Heavy-Duty Surface Mount Automatic Door Bottom

- Field Reversible
- Can Be Trimmed 2" Shorter

This CRL Commercial Heavy-Duty Automatic, Surface Mount, Door Bottom is mechanically actuated. An internal carrier bar with a vinyl insert drops from a concealed cavity to form a tight seal between the base of the door and the threshold. It is ideal for use where carpeted interiors require the door bottom to retract when the door is opened. Supplied with a frame "actuator" protector plate, the door bottom is field reversible for either "hand" of door.



CAT. NO.	FINISH	LENGTH
DB035CV36	Aluminum	36" (914 mm)
DB035DV36	Dark Bronze Anodized	36" (914 mm)

Minimum order: 1 each. Finishes can be combined for quantity pricing.


CAT. NO.	FINISH	LENGTH
75NGA36	Aluminum	36" (914 mm)

Minimum order: 1 each.

CRL Commercial Medium-Duty Full Mortise Automatic Door Bottom

- Low Closing Force
- Full Mortise Installation

This CRL Medium-Duty Automatic Door Bottom is mechanically actuated. An internal carrier bar with a vinyl insert drops from a concealed cavity to form a tight seal between the base of the door and the threshold. It is ideal for use where carpeted interiors require the door bottom to retract when the door is opened. Supplied with a frame "actuator" protector plate, the door bottom is field reversible for either "hand" of door.




CAT. NO.	FINISH	LENGTH
72NGA36	Aluminum	36" (914 mm)

Minimum order: 1 each.

CRL Commercial Heavy-Duty Full Mortise Automatic Door Bottom

- Seals Bottom of Door
- Full Mortise Installation

This CRL Commercial Heavy-Duty Automatic Door Bottom is designed to be mortised into the bottom of the door and is mechanically actuated. An internal carrier bar with a vinyl insert drops from a concealed cavity to form a tight seal between the base of the door and the threshold. This is an ideal bottom weather seal for use where carpeted interiors require the door bottom to retract upward when the door is opened. Supplied with a frame "actuator" protector plate, the door bottom is field reversible for either "hand" of door.




CAT. NO.	FINISH	LENGTH
76NGA36	Aluminum	36" (914 mm)

Minimum order: 1 each.

CRL Door Bottom Seal

- Slotted Holes for Easy Adjustment

This CRL Door Bottom Seal features a thermo-plastic elastomer seal for exceptional cold weather protection and stays flexible between -70°F (-57°C) and +250°F (121°C) temperatures. Stainless steel fasteners are provided.




CAT. NO.	FINISH	LENGTH
25VRA32	Aluminum	32" (813 mm)
25VRD32	Dark Bronze Anodized	32" (813 mm)
25VRA36	Aluminum	36" (914 mm)
25VRD36	Dark Bronze Anodized	36" (914 mm)
25VRA48	Aluminum	48" (1219 mm)
25VRD48	Dark Bronze Anodized	48" (1219 mm)

Minimum order: 1 each. Sizes and finishes can be combined for quantity pricing.

CRL Residential Automatic Door Sweep

- Spring-Loaded

This spring-loaded Door Bottom Sweep retracts up and away from the face of the door when opened. When the door is closed, the supplied cam lowers the Sweep. The gap at the door base and threshold is now sealed to prevent dust, moisture, and drafts from entering. Ideal for use where carpeted interiors require the Door Sweep to lift "up and away" from the carpet. Installation screws are included.

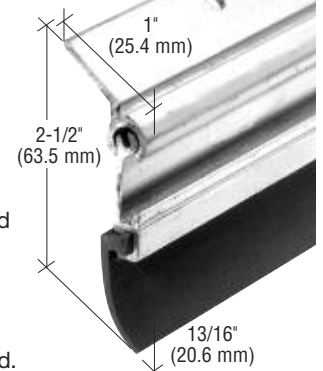

CAT. NO.	FINISH	LENGTH
DB019AV36	Aluminum	36-1/2" (927 mm)

Minimum order: 1 each.