


VON DUPRIN® 98/99™ Strike/Stile Information


DEVICE TYPE	STANDARD SINGLE DOOR			STANDARD DOUBLE DOOR			OPTIONAL SINGLE DOOR			OPTIONAL DOUBLE DOOR		
	STRIKE	TRIM/STILE		STRIKE w/MULLION*	TRIM/STILE		STRIKE	TRIM/STILE		STRIKE w/MULLION*	TRIM/STILE	
98/99	299	990/992 994/996	696/697	299 x 4954	990/992 994/996	696/697	1439 or 1410 1606	990/992 994/996	696/697	299 x 5654 1408 x 5754 1606 x 1654	990/992 994/996	696/697
		4-1/2" (114mm)	4-3/8" (111mm)		4-7/8" (124mm)	4-3/4" (121mm)		3-13/16" (97mm)	3-13/16" (97mm)		4-7/16" (113mm)	4-1/4" (108mm)
											3-13/16" (97mm)	3-13/16" (97mm)
								4-1/16" (103mm)	3-15/16" (100mm)		4-7/16" (113mm)	4-1/4" (108mm)
98-F/99-F	299F	4-1/2" (114mm)	4-3/8" (111mm)	499F x 9954	4-7/8" (124mm)	4-3/4" (121mm)	—	—	—	499F x 9854 KR9954	—	—
9875 9975	575	4-3/4" (121mm)	4-3/4" (121mm)	575-2	—	—	—	—	—	576A-576B	4-3/4" (121mm)	4-3/4" (121mm)
9875-F 9975-F	575	4-3/4" (121mm)	4-3/4" (121mm)	575-2	—	—	—	—	—	576A-576B	4-3/4" (121mm)	4-3/4" (121mm)
9857 9957	299 (Top)	4-1/2" (114mm)	4-3/8" (111mm)	299 x 4954	4-7/8" (124mm)	4-3/4" (121mm)	1439 or 1410	3-13/16" (97mm)	3-13/16" (97mm)	299 x 4954	4-7/16" (113mm)	4-1/4" (108mm)
	299 (Middle)						1606	4-1/16" (103mm)	3-15/16" (100mm)	1408 x 5754	3-13/16" (97mm)	3-13/16" (97mm)
	304L/284-L (Bottom)									1606 x 1654	4-7/16" (113mm)	4-1/4" (108mm)
9857-F 9957-F	299F (Top) 299F (Middle) 304L (Bottom)	4-1/2" (114mm)	4-3/8" (111mm)	299F 499F x 9954 304L	4-7/8" (124mm)	4-3/4" (121mm)	—	—	—	—	—	—
	STRIKE	APPLICATION			TRIM/STILE		OPTIONAL STRIKE			APPLICATION	TRIM/STILE	
9827 9927 LATCH RETRACTION PL9827/PL9927 PULLMAN LATCH 9827-F 9927-F 9847 9947 9848 9948	299 (Top) 304L/248L-4 (Bottom)	Single Door			990/992 994/996	696/697	260U (Top) 385A (Bottom)			Single Door	990/992 994/996	696/697
	299 (Top) 304L/248L-4 (Bottom)				3-11/16" (94mm)	3-5/8" (92mm)					3-11/16" (94mm)	3-5/8" (92mm)
	299 (Top) 304L (Bottom)	Two Vertical Rod Devices			3-11/16" (94mm)	3-5/8" (92mm)	260U (Stainless) 385A (Bottom)			Two Vertical Rod Devices	3-11/16" (94mm)	3-5/8" (92mm)
	338 (Top) 385A (Bottom)				4-3/4" (121mm)	4-3/4" (121mm)				Vertical Rod with Mortise Lock Device	4-3/4" (121mm)	4-3/4" (121mm)
9847-F 9947-F 9848-F 9948-F	338 (Top) 385A (Bottom)	Two Vertical Rods			4-1/4" (108mm)	4-1/8" (105mm)	304L (Bottom)			Two Vertical Rods	4-1/4" (108mm)	4-1/8" (105mm)
		Vertical Rod with Mortise Lock Device			4-3/4" (121mm)	4-3/4" (121mm)				Vertical Rod with Mortise Lock Device	4-3/4" (121mm)	4-3/4" (121mm)
9847WDC 9947WDC	338 (Top) 385A (Bottom)	Single Door			4-1/4" (108mm)	4-1/4" (108mm)	304L			Single Door	4-1/4" (108mm)	4-1/4" (108mm)
		Two Vertical Rod Devices			4-1/4" (108mm)	4-1/4" (108mm)				Two Vertical Rod Devices	4-1/4" (108mm)	4-1/4" (108mm)
		Vertical Rod with Mortise Lock Device			4-3/4" (121mm)	4-3/4" (121mm)				Vertical Rod with Mortise Lock Device	4-3/4" (121mm)	4-3/4" (121mm)
9847WDC-F 9947WDC-F	338 (Top) 385A (Bottom)	Two Vertical Rod Devices			4-1/4" (108mm)	4-1/4" (108mm)	304L			Two Vertical Rod Devices	4-1/4" (108mm)	4-1/4" (108mm)

*Mullion information—refer to the General and Auxiliary catalog.


Strikes for rim devices




Projection 9/16" (14mm)




Projection 13/16" (21mm)




Projection 13/16" (21mm)




Projection 15/16" (24mm)




One per pair of doors




Projection 1/2" (13mm)



Projection 1/2" (13mm)




Projection 3/8" (10mm)
Panic Devices Only




- Requires Coordinator
- For Fire Rated Application, consult factory


Strikes for vertical rod devices




Projection 3/8" (10mm)




Projection 3/8" (10mm)
For Fire Rated Application, consult factory




Projection 13/16" (21mm)




Projection 13/16" (21mm)




Mortise 13/16" (21mm)



Mortise 5/8" (16mm)




Mortise 2-1/2" (64mm)




For use with WDC devices
when used with wood frames


Strikes for mortise lock devices

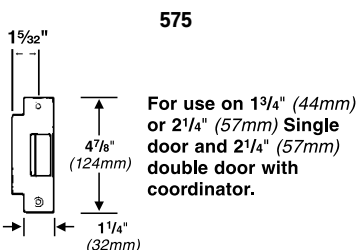


For use on 1 3/4" (44mm) or 2 1/4" (57mm) Single door and 2 1/4" (57mm) double door with coordinator.



For use on 1 3/4" (44mm) thick double door with coordinator and astragal



Open back strike for 1 3/4" (44mm) thick double doors without coordinator.



Open back strike for 2 1/4" (57mm) thick double doors without coordinator.

- Not for use with astragals
- Not for use on wood doors
- Acceptable for 90 minute pair of hollow metal doors