INTERIOR ACCESS PANELS: CONCEALED FRAME

CONCEALED FRAME FLUSH ACCESS PANELS FOR DRYWALL OR PLASTER: WB, PW, and PWE, Series



Frame: 16 gauge with 1" drywall bead that can be taped and mudded.

Door: 16 gauge steel with concealed continuous hinge.

Finish: Gray powder coat primer.

Lock: Flush screwdriver-operated cam (C).

PW: Plaster (Wall or Ceiling)

Frame: 16 gauge steel with 3/4" plasterguard for application of plaster.

Door: 16 gauge steel with concealed continuous hinge.

Finish: Gray powder coat primer.

Lock: Flush screwdriver-operated cam (C).

PWE: Plaster (Wall or Ceiling)

Frame: 16 gauge steel with 3/4" plasterguard with an additional 3" wide wing of

metal lath for a plaster application to the edge of the door. **Door:** 16 gauge steel with concealed continuous hinge.

Finish: Gray powder coat primer.

22" x 22"

22" x 30"

24" x 24"


22 1/2" x 22 1/2"


22 1/2" x 30 1/2"

Lock: Flush screwdriver-operated cam (C).

Options: Cylinder Lock, Knob Cam, Torx, Spanner or Hex Head Cam, Custom Colors, Plexiglass View Window, Removeable Door (no hinge), WB, & PW Options: Also include Mortise Cam Latch, Mortise Deadbolt Lock and Mortise Slam Latch.

See Optional Colors and Locks on Page 12.

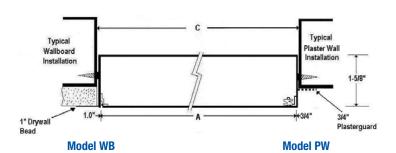

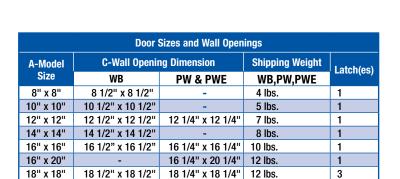

Custom Sizes and Special Modifications Available Upon Request

24 1/2" x 24 1/2" | 24 1/4" x 24 1/4" | 19 lbs.

16 lbs.

21 lbs.

Most Sizes Above in Stock at One of Our 7 US Warehouses for Next Day Shipping - See Stock List.



MODEL WB



MODEL PW



MODEL PWE

Order Format For Above Models: Style Code Width Height Lock (C Standard or Optional) Optional Color Code Pg 12 Example: WB-1212SCH-R

4

4

4