

## DETAIL & SUBMITTAL SHEET

WALLS & CEILINGS



### SPECIFICATIONS:

**Door:** 14 ga. steel

**Frame:** 16 ga. steel. These models have a 1" wide perforated flange of 24 ga. galvanized steel for mounting purposes

**Hinge:** Full length piano hinge on 6 x 6 and 8 x 8. Full length piano hinge also on 24 x 36 and larger. Concealed hinge on sizes 10 x 10 to 24 x 24

**Latches:** Flush, stainless steel cam latch

**Finish:** Grey baked enamel coat


### OPTIONS:

- ☐ Stainless Steel Type 304 No. 4 Satin Finish Brushed
- ☐ Stainless Steel Type 316 No. 4 Satin Finish Brushed


#### Options:

- ☐ WB 151 Key Code Cylinder locks-keyed alike with 2 keys per lock
- ☐ Mortise Best Lock
- ☐ Weather resistive neoprene gasketing on 3 sides\*
- ☐ Special sizes available

### FRONT ELEVATION

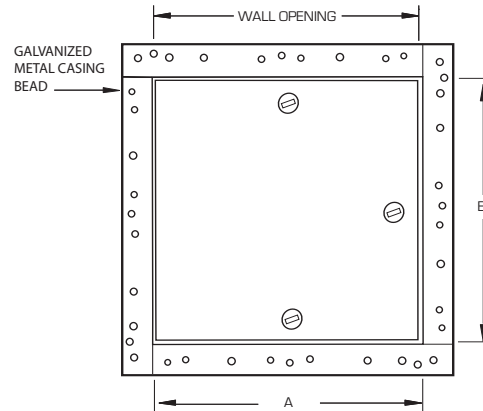

### SECTION DETAIL

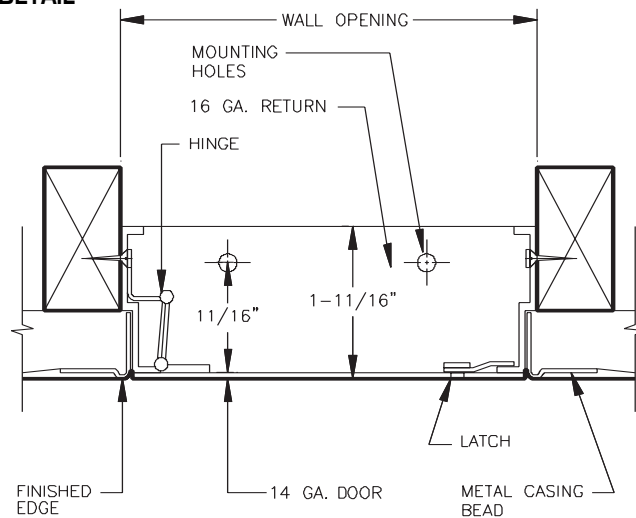

A quality flush panel door with a tape-in drywall bead flange, eliminates visual distraction created by projecting, surface-mounted units.

| ✓ | Item No. | Door Size W x H | Wall Opening    | Cam Latch | Ship Wt. Lbs. |
|---|----------|-----------------|-----------------|-----------|---------------|
|   | DW 400   | 6 x 6           | 6 1/4 x 6 1/4   | 1         | 3             |
|   | DW 400   | 8 x 8           | 8 1/4 x 8 1/4   | 1         | 4             |
|   | DW 400   | 10 x 10         | 10 1/4 x 10 1/4 | 1         | 5             |
|   | DW 400   | 12 x 12         | 12 1/4 x 12 1/4 | 1         | 7             |
|   | DW 400   | 12 x 24         | 12 1/4 x 24 1/4 | 2         | 12            |
|   | DW 400   | 14 x 14         | 14 1/4 x 14 1/4 | 3         | 9             |
|   | DW 400   | 16 x 16         | 16 1/4 x 16 1/4 | 3         | 11            |
|   | DW 400   | 18 x 18         | 18 1/4 x 18 1/4 | 3         | 12            |
|   | DW 400   | 20 x 20         | 20 1/4 x 20 1/4 | 3         | 15            |
|   | DW 400   | 22 x 22         | 22 1/4 x 22 1/4 | 4         | 18            |
|   | DW 400   | 22 x 30         | 22 1/4 x 30 1/4 | 4         | 24            |
|   | DW 400   | 22 x 36         | 22 1/4 x 36 1/4 | 5         | 27            |
|   | DW 400   | 24 x 24         | 24 1/4 x 24 1/4 | 4         | 20            |
|   | DW 400   | 24 x 36         | 24 1/4 x 36 1/4 | 5         | 27            |
|   | DW 400   | 24 x 48         | 24 1/4 x 48 1/4 | 6         | 37            |
|   | DW 400   | 30 x 30         | 30 1/4 x 30 1/4 | 5         | 29            |
|   | DW 400   | 30 x 36         | 30 1/4 x 36 1/4 | 5         | 31            |
|   | DW 400   | 36 x 36         | 36 1/4 x 36 1/4 | 7         | 42            |

\* Closed cell sponge, blend of Neoprene/EPDM/SBR. Meets ASTM D-1056: SCE 41, RE 41, 2A1; substrate UL 94HF-1 recognized.

Project: \_\_\_\_\_ Date: \_\_\_\_\_

Contractor: \_\_\_\_\_ Architect: \_\_\_\_\_

Sizes: \_\_\_\_\_ Quantity: \_\_\_\_\_ Approval Initials: \_\_\_\_\_



Corporate Office: 1330 Progress Drive • Front Royal, VA 22630  
Phone: 1-800-255-5515 • Fax: 1-800-822-5001

[www.wbdoors.com](http://www.wbdoors.com)