


DETAIL & SUBMITTAL SHEET


WALLS & CEILINGS



FRONT ELEVATION

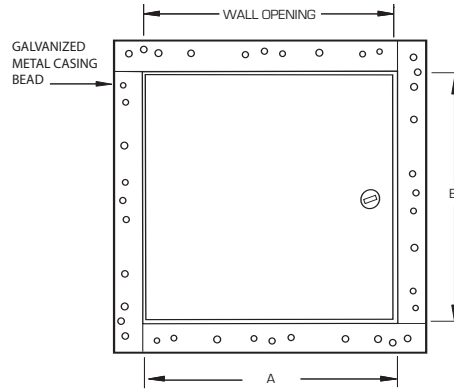

SECTION DETAIL

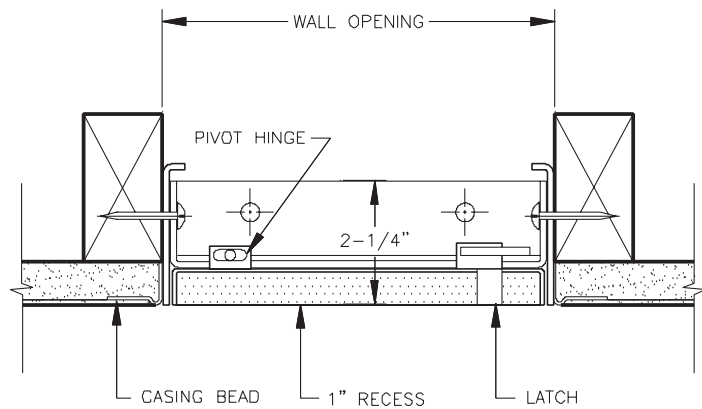

SPECIFICATIONS:

Door: 14 ga. steel, 1" recessed depth to accommodate drywall

Frame: 16 ga. steel. These models have a 1" wide perforated flange of 24 ga. galvanized steel for mounting purposes.

Hinge: Concealed pivot rod

Latches: Flush, stainless steel cam latch

Finish: Grey baked enamel coat

OPTIONS:

Finishes:

- ☐ Stainless Steel Type 304 No. 4 Satin Finish Brushed
- ☐ Stainless Steel Type 316 No. 4 Satin Finish Brushed

Options:

- ☐ Key operated medium barrel cylinder lock
- ☐ Weather resistive neoprene gasketing on 3 sides*
- ☐ Special sizes available

✓	Item No.	Door Size W x H	Wall Opening	Cam Latch	Ship Wt. Lbs.
	RDW 410	12 x 12	12 1/4 x 12 1/4	1	6
	RDW 410	16 x 16	16 1/4 x 16 1/4	3	12
	RDW 410	18 x 18	18 1/4 x 18 1/4	3	14
	RDW 410	24 x 24	24 1/4 x 24 1/4	4	21

Our recessed drywall door gives the option of installing a matching piece of drywall into the door panel thus keeping the continuity of the visual area.

* Closed cell sponge, blend of Neoprene/EPDM/SBR. Meets ASTM D-1056: SCE 41, RE 41, 2A1; substrate UL 94HF-1 recognized.

Project: _____ Date: _____

Contractor: _____ Architect: _____

Sizes: _____ Quantity: _____ Approval Initials: _____



Corporate Office: 1330 Progress Drive • Front Royal, VA 22630
Phone: 1-800-255-5515 • Fax: 1-800-822-5001

www.wbdoors.com