


DETAIL & SUBMITTAL SHEET


WALLS &
CEILINGS



FRONT
ELEVATION

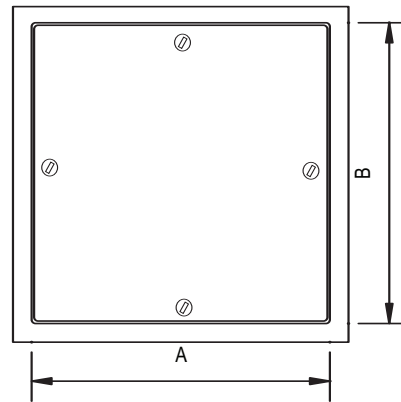

SECTION DETAIL

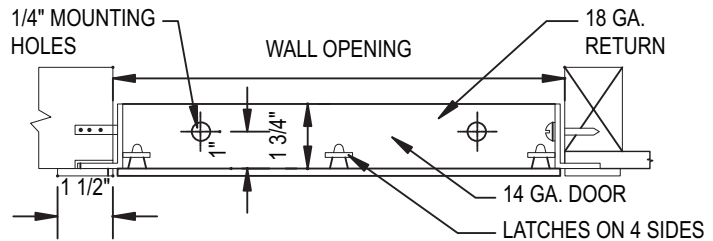

SPECIFICATIONS:

Door: 14 ga. steel. Trim 1-1/2" wide.

Frame: 18 ga. steel having a depth of 1-3/4"

Latches: Flush, stainless steel cam latches on all 4 sides

Finish: Grey baked enamel coat

OPTIONS:

Finishes:

- ☐ Stainless Steel Type 304 No. 4 Satin Finish Brushed
- ☐ Stainless Steel Type 316 No. 4 Satin Finish Brushed

Options:

- ☐ WB 151 Key Code Cylinder locks-keyed alike with 2 keys per lock
- ☐ Mortise Best Lock
- ☐ Weather resistive neoprene gasketing all 4 sides*
- ☐ Special sizes available

Designed with the same quality features as our GP Premium door, but primarily designed for use in confined areas. Simply unscrew the cam latches, and the panel can be easily removed. The frame is laser cut from one sheet of steel for visual aesthetics.

✓	Item No.	Door Size W x H	Wall Opening	Cam Latch	Ship Wt. Lbs.
	RP 110	8 x 8	8 1/4 x 8 1/4	4	3
	RP 110	12 x 12	12 1/4 x 12 1/4	4	8
	RP 110	16 x 16	16 1/4 x 16 1/4	4	10
	RP 110	18 x 18	18 1/4 x 18 1/4	4	13
	RP 110	24 x 24	24 1/4 x 24 1/4	8	20

* Closed cell sponge, blend of Neoprene/EPDM/SBR. Meets ASTM D-1056: SCE 41, RE 41, 2A1; substrate UL 94HF-1 recognized.

Project: _____ Date: _____

Contractor: _____ Architect: _____

Sizes: _____ Quantity: _____ Approval Initials: _____



Corporate Office: 1330 Progress Drive • Front Royal, VA 22630
Phone: 1-800-255-5515 • Fax: 1-800-822-5001

www.wbdoors.com