DETAIL & SUBMITTAL SHEET



SPECIFICATIONS:

Door: 14 ga. steel. 1-1/2" trim

Door Stops: 18 ga. steel on 3 sides of door opening. Hinge: Full length piano hinge allows door to open to 180°

Latches: Flush, stainless steel cam latch Finish: Grey baked enamel coat

OPTIONS:

Finishes:


- ☐ Stainless Steel Type 304 No. 4 Satin Finish Brushed
- ☐ Stainless Steel Type 316 No. 4 Satin Finish Brushed

Options:


- WB 151 Key Code Cylinder locks-keyed alike with 2 keys per lock
- ☐ Weather resistive neoprene gasketing all 4 sides*
- ☐ Special sizes available

	/	Item No.	Door Size W x H	Wall Opening	Cam Latch	Ship Wt. Lbs.
Ī		SMP 120	8 x 8		1	4
		SMP 120	12 x 12	TO SUIT	1	5
		SMP 120	16 x 16	DOOR	3	10
		SMP 120	18 x 18	PANEL SIZE	3	14
		SMP 120	24 x 24	0	4	18

FRONT ELEVATION



SECTION DETAIL

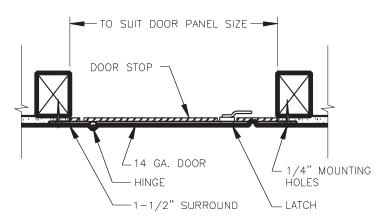

When access is a requirement without a framed opening, our precision fit surface mounted access door is the solution in all types of walls and ceilings. The frame is laser cut from one sheet of steel for visual aesthetics.

* Closed cell sponge, blend of Neoprene/EPDM/SBR. Meets ASTM D-1056: SCE 41, RE 41, 2A1; substrate UL 94HF-1 recognized.

Project:		Date:		
Contractor:	Architect:			
Sizes:	Quantity:	Approval Initials:		

