

## PD500 series padlocks



Available in fixed core, large format interchangeable core (LFIC), and small format interchangeable core (SFIC).

### features

**Case:** Solid Brass

**Shackle:** High strength molybdenum alloy steel. Rust resistant with a chrome finish. Optional brass shackles available.

**Shackle Diameter:** 3/8" (10mm) or 5/16" (8mm)

**Shackle Locking:** Two hardened steel balls at heel and toe of shackle.

**Extended Shackles:** Optional shackles with 2" and 3" vertical clearance are available to order.


**Chains:** Optional 9" chains available with clevis around shackle or riveted to case. To order with padlocks specify suffix:

- for clevis around shackle
  - "S42A" = brass chain
  - "S42S" = steel chain
- for clevis riveted to case
  - "C42A" = brass chain
  - "C42S" = steel chain

See page 15 for chains ordered separately.

**Keys:** Two nickel silver change keys supplied with each padlock. Control key quantity must be specified for interchangeable core.

### Dimensions and Details:

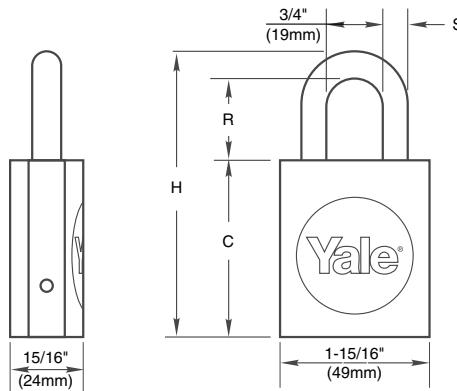

| Model Numbers            |               | Description | Case Height (C) | Vertical Clearance (R) | Diameter (S) | Overall Height (H) | Pins   |
|--------------------------|---------------|-------------|-----------------|------------------------|--------------|--------------------|--------|
| Molybdenum Steel Shackle | Brass Shackle |             |                 |                        |              |                    |        |
| PD514                    | PD514B        | LFIC        | 2-5/16" (59mm)  | 1-1/16" (27mm)         | 5/16" (8mm)  | 3-3/4" (95mm)      | 6      |
| PD2514                   | PD2514B       |             |                 | 2" (51mm)              |              | 4-3/8" (111mm)     | 6      |
| PD3514                   | PD3514B       |             |                 | 3" (76mm)              |              | 5-3/8" (137mm)     | 6      |
| PD515                    | PD515B        |             |                 | 1-1/16" (27mm)         |              | 3-5/8" (91mm)      | 6 or 7 |
| PD2515                   | PD2515B       |             |                 | 2" (51mm)              |              | 4-9/16" (115mm)    | 6 or 7 |
| PD3515                   | PD3515B       |             |                 | 3" (76mm)              |              | 5-5/8" (142mm)     | 6 or 7 |
| PD516                    | PD516B        |             | 2-5/16" (59mm)  | 1-1/16" (27mm)         |              | 3-3/4" (95mm)      | 6      |
| PD2516                   | PD2516B       |             |                 | 2" (51mm)              |              | 4-3/8" (111mm)     | 6      |
| PD3516                   | PD3516B       |             |                 | 3" (76mm)              |              | 5-3/8" (137mm)     | 6      |
| PD524                    | PD524B        |             |                 | 1-1/16" (27mm)         |              | 3-3/4" (95mm)      | 6      |
| PD2524                   | PD2524B       |             |                 | 2" (51mm)              |              | 4-3/8" (111mm)     | 6      |
| PD3524                   | PD3524B       |             |                 | 3" (76mm)              |              | 5-3/8" (137mm)     | 6      |
| PD534                    | PD534B        | LFIC        | 3/8" (10mm)     | 1-1/16" (27mm)         |              | 3-3/4" (95mm)      | 7      |
| PD2534                   | PD2534B       |             |                 | 2" (51mm)              |              | 4-3/8" (111mm)     | 7      |
| PD3534                   | PD3534B       |             |                 | 3" (76mm)              |              | 5-3/8" (137mm)     | 7      |
| PD525                    | PD525B        |             |                 | 1-1/16" (27mm)         |              | 3-3/4" (95mm)      | 6 or 7 |
| PD2525                   | PD2525B       |             |                 | 2" (51mm)              |              | 4-3/8" (111mm)     | 6 or 7 |
| PD3525                   | PD3525B       |             |                 | 3" (76mm)              |              | 5-3/8" (137mm)     | 6 or 7 |
| PD526                    | PD526B        |             |                 | 1-1/16" (27mm)         |              | 3-3/4" (95mm)      | 6      |
| PD2526                   | PD2526B       |             |                 | 2" (51mm)              |              | 4-3/8" (111mm)     | 6      |
| PD3526                   | PD3526B       |             |                 | 3" (76mm)              |              | 5-3/8" (137mm)     | 6      |
|                          |               |             |                 |                        |              |                    |        |

Note: All dimensions are in inches and are to the nearest 1/16" (2mm). Dimensions are nominal.

## PD500 series padlocks

**Keying:** Padlocks available 0-bitted, uncombinated, keyed alike keyed different or master keyed. *Note: Yale KeyMark cylinders and cores are not available 0-bitted.*

**LFIC** – Padlocks furnished standard less core. Available for Yale 6- or 7-pin large format interchangeable cores. Specify core and keying required.



**Cores:**

| Model Number | Description  |
|--------------|--|
| 1210         | 6-pin Conventional   |
| 1220         | 7-pin Conventional   |
| 5210         | 6-pin Security   |
| 5220         | 7-pin Security   |
| K800         | 6- or 7-pin Yale® KeyMark® (Specify number of pins required) |

**SFIC** – Padlocks furnished standard less core. Available for 6- or 7-pin small format interchangeable core. Specify core and keying if required.



**Cores:**

| Model Number | Description   |
|--------------|---|
| K600         | 6- or 7-pin Yale® KeyMark® (Specify number of pins required)          |
| A600         | 6- or 7-Pin Best® Keyway (Specify keyway and number of pins required) |

**Fixed Core** – Available in 6-pin only. Furnished standard with Yale 1801 type component cylinder for easy rekeying in field. Security and Yale® KeyMark® cylinders available to order. Less cylinder also available, specify "x LC". Padlocks provided less cylinder are furnished with cylinder sleeve and adaptor.



**Cylinders:**

| Model Number | Description                                       |
|--------------|---|
| 1801         | Standard  |
| 5801         | Security  |
| K400         | Yale® KeyMark®                                    |
| 2801         | Schlage® C Keyway (0-bitted or keyed random only) |

