

All systems designed to meet NYC Building Code Standard RS 6-1/1A, Stairway Exit Path Marking Requirements.

DIRECTIONAL SIGNAGE

Photoluminescent directional signs shall be placed in the stairwell or exit at every entrance, visible upon opening the door into the stairwell or exit. Not required for existing building; however this exception shall not apply to below-grade stories.



#1220
Progress to the Right
8"(203.2) x 4.5"(114.3)



#1221
Progress Down and to the Right
8"(203.2) x 4.5"(114.3)



#1222
Progress Up and to the Right
8"(203.2) x 4.5"(114.3)



#1223
Progress to the Left
8"(203.2) x 4.5"(114.3)



#1224
Progress Down and to the Left
8"(203.2) x 4.5"(114.3)



#1225
Progress Up and to the Left
8"(203.2) x 4.5"(114.3)



#1226
Progress Forward
8"(203.2) x 4.5"(114.3)



#1227
Progress Down from here
8"(203.2) x 4.5"(114.3)

DOOR SIGNS

Intermediate Exit Door

Wall-Mounted



#1230
EXIT - Left Arrow
(with pictogram)
8"(203.2) x 9"(228.6)



#1231
EXIT - Right Arrow
(with pictogram)
8"(203.2) x 9"(228.6)

Door-Mounted



#1232
EXIT (with pictogram)
13"(330.2) x 4.5"(114.3)

Final Exit Door

Wall Mounted



#1228
FINAL EXIT
(with pictogram)
8"(203.2) x 11"(279.4)


DOOR KIT

DOOR KIT available in two options:

#1237 DOOR KIT - For 3'X7' Door

Kit contains:


- #1201 Photoluminescent Strip
1"(25.4) x 36"(914.4) (1 pc.)
1"(25.4) x 84"(2133.6) (2 pcs.)
- #1207 Door Hardware Marking
Latch Type
7.8"(198.1) x 6"(152.4) (1 pc.)
- #1208 Door Hardware Marking
Bar Type 1"(25.4) x 30"(762) (1 pc.)
- #1232 Exit Door sign
13"(330.2) x 4.5"(114.3) (1 pc.)

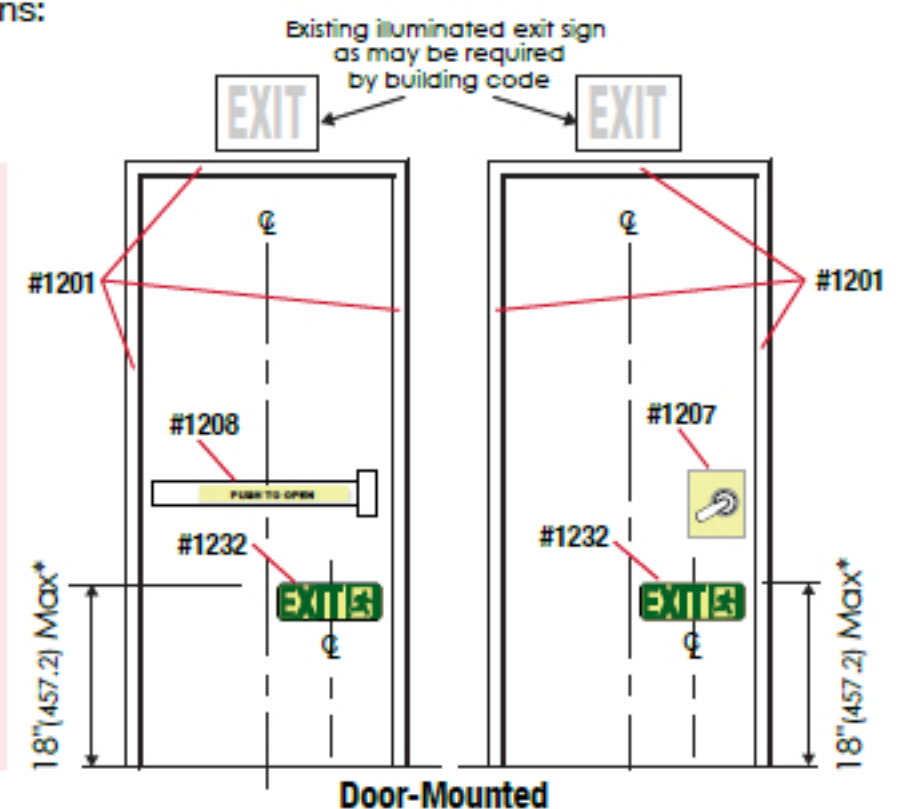

#1248 DOOR KIT - For 4'X8' Door

Kit contains:

- #1201 Photoluminescent Strip
1"(25.4) x 48"(1219.2) (1 pc.)
1"(25.4) x 96"(2438.4) (2 pcs.)
- #1208 Door Hardware Marking
Bar type
1"(25.4) x 42"(1066.8) (2 pcs.)
- #1232 Exit Door sign
13"(330.2) x 4.5"(114.3) (2 pcs.)

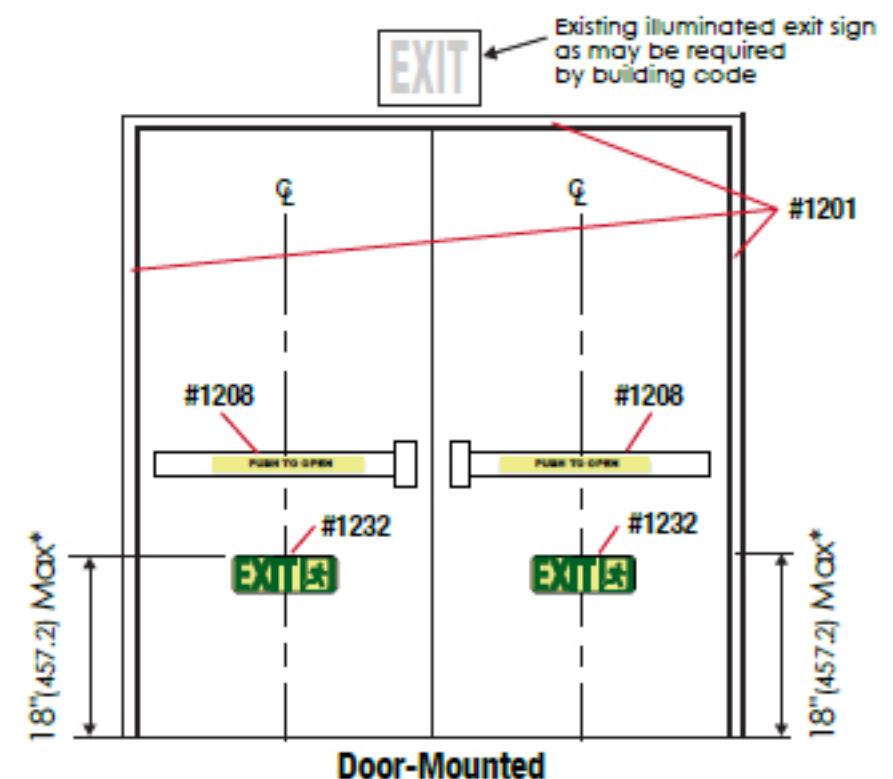

* 26" (660.4) Max. for existing buildings