



# #55/ #557 Adjustable Mortised Astragal INSTALLATION INSTRUCTIONS

## Adjustable Full Mortised Astragal, Spring-Loaded

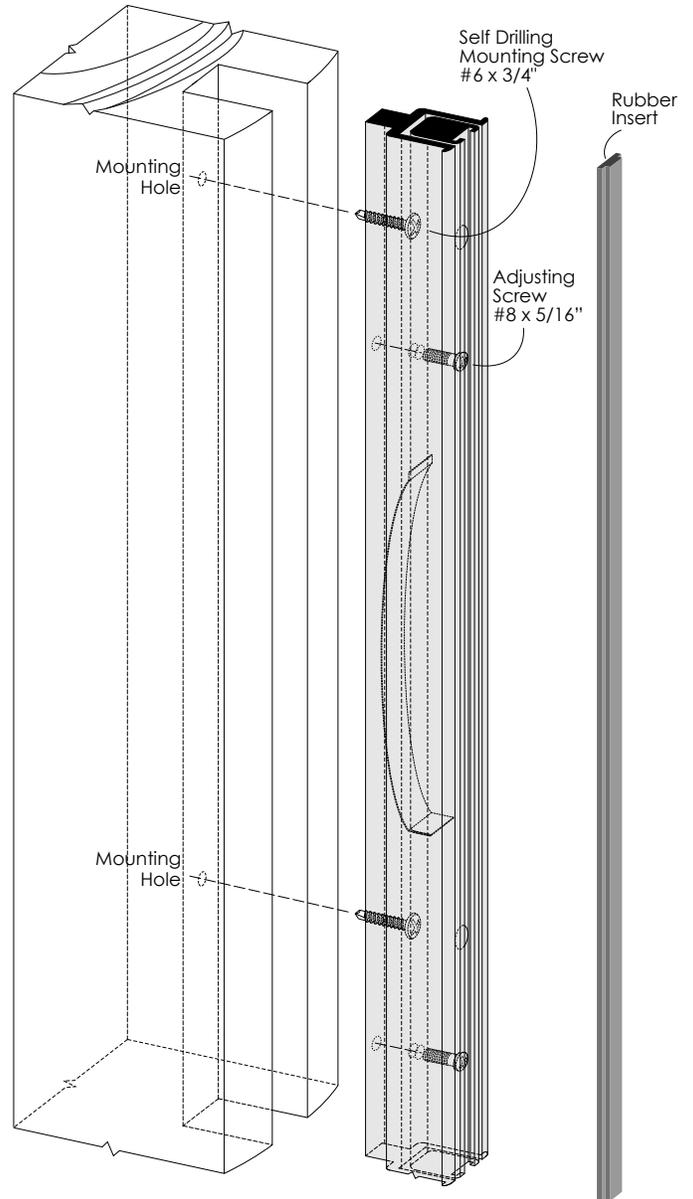

- 1 Mortise doors, dimension as shown above. The gap between the doors when they closed should be minimum .250"
- 2 Measure and cut the whole piece to size needed. DO NOT DISASSEMBLE.
- 3 Remove the neoprene insert only.
- 4 Install the astragal into the door mortise, fasten with self drilling screws provided.
- 5 Fasten the adjusting screws and make proper adjustment.
- 6 Insert back the neoprene rubber.

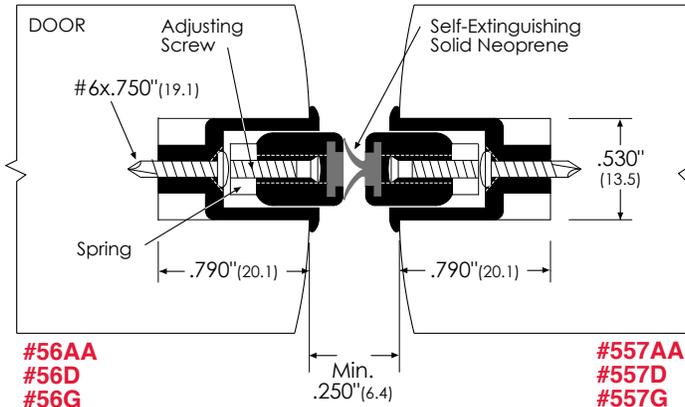

## ZERO INTERNATIONAL, INC.

415 Concord Avenue, Bronx, NY 10455-1004

Tel : 718-585-3230 • Fax : 718-292-2243

E-mail : zero@zerointernational.com

www.zerointernational.com