




Adjustable Sealing Systems- Jamb Applied




Note: AA = Clear Anodized G = Gold Anodized STS = Stainless Steel
D = Dark Bronze Anodized SP = Steel Prime

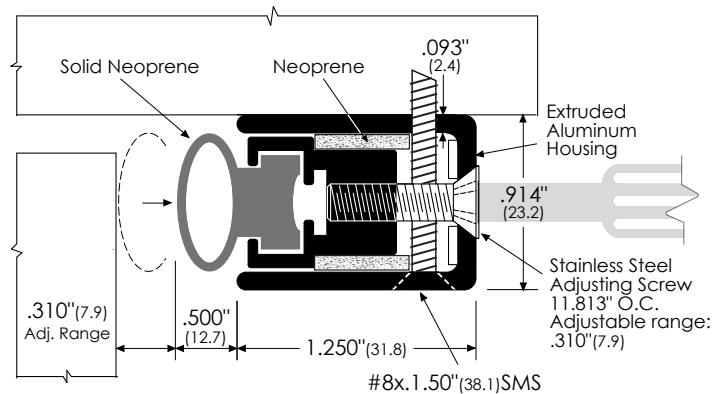

#770AA #770D
ZERO Compress-O-Matic®
45 min. as a stop
90 min. when applied to stop

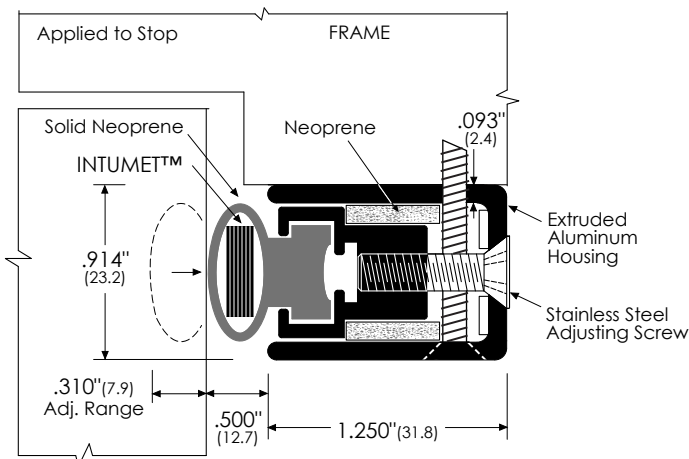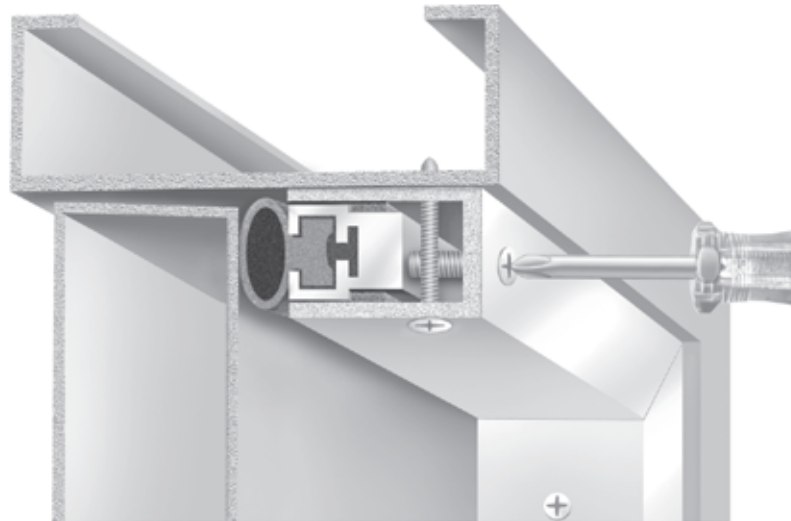


#770FS AA
#770FS D
#770FS G
770FS has 180 min. fire rating for metal doors when applied to 5/8 inch stop

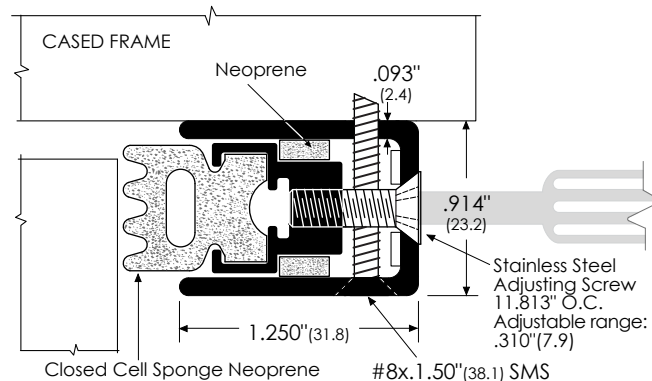

#170AA
#170D
#170G




Positive Pressure Listed for 16 gauge steel cased opening. 45 minutes pairs or 60 & 90 minutes single and pairs. For wood or metal door assemblies.

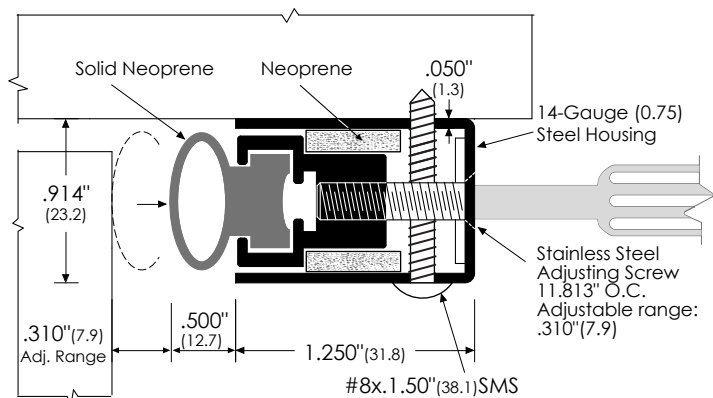

POSITIVE PRESSURE FIRE RATINGS

#770SP
#770STST


90 min. as a stop to wood & metal doors

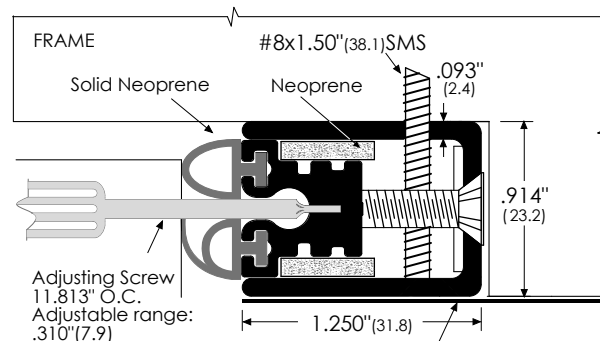

#7770AA
#7770D
#7770G
ZERO Compress-O-Matic®



Stainless Steel Plate Cover with PSA (optional)

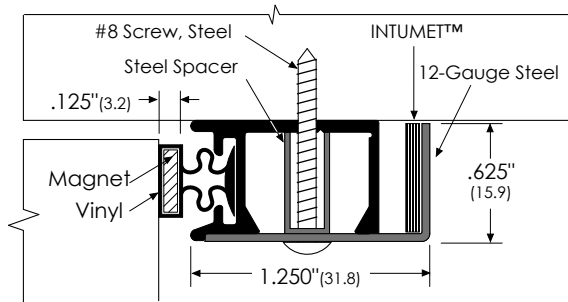

#837SP












Adjustable Sealing Systems - Jamb Applied



Note: A = Aluminum
D = Dark Bronze Anodized
STST = Stainless Steel

AA = Clear Anodized
SP = Steel Prime

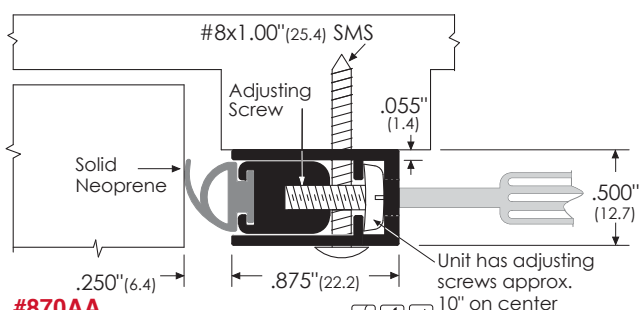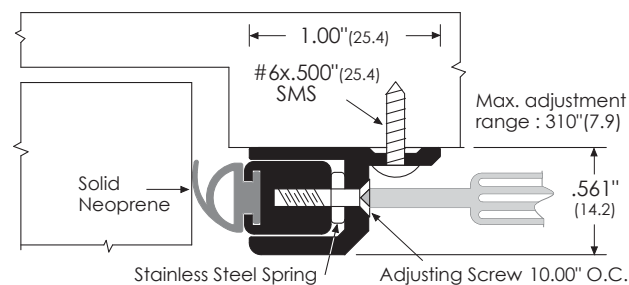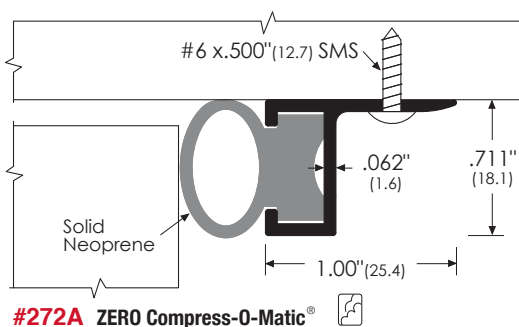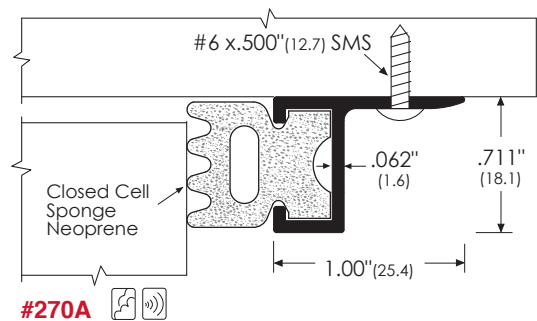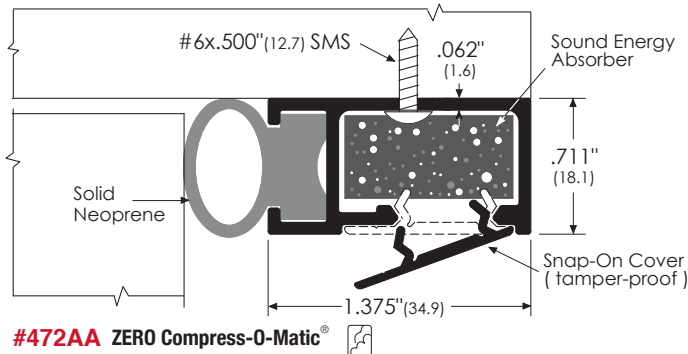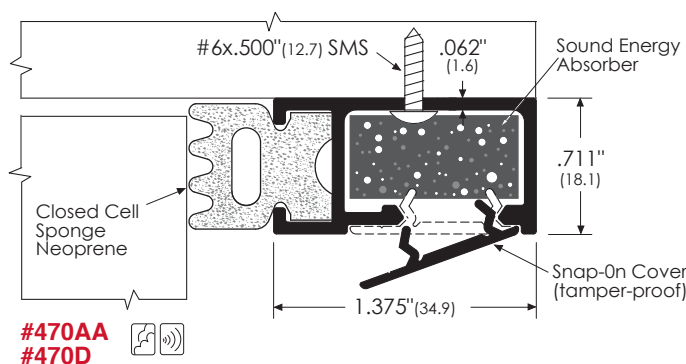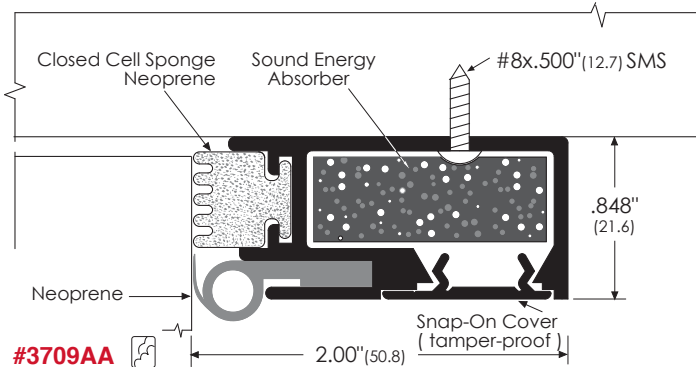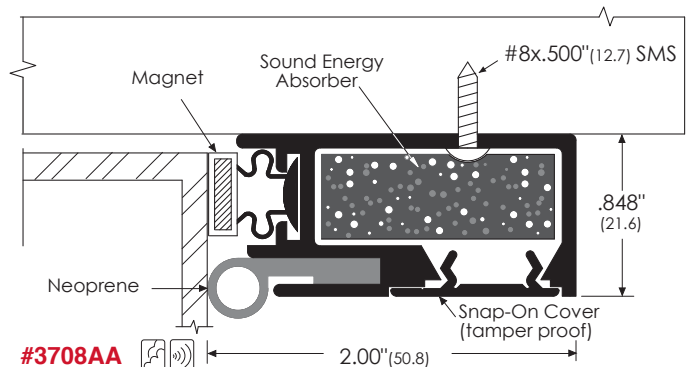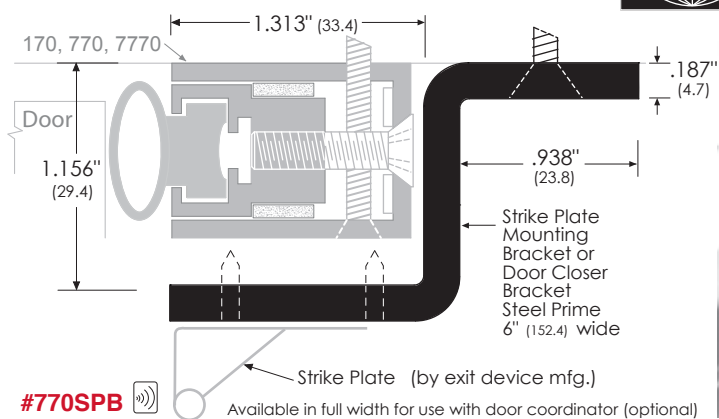

#712AA ADJUSTABLE & SPRING LOADED
ZERO Compress-O-Matic®
Use 3 3/4" Backset or Lever Handle (not knobs)

#870AA
#870D ZERO Compress-O-Matic®