


## Head & Jamb Intumet™

Intumescent fire seal for use where smoke sealing is not required. Designed for mortised into a wood door or frame, or into an edge strip of a wool or composite door leaf. Available in black color. Supplied in 8 feet (2.4m)



**#3062500PSA**

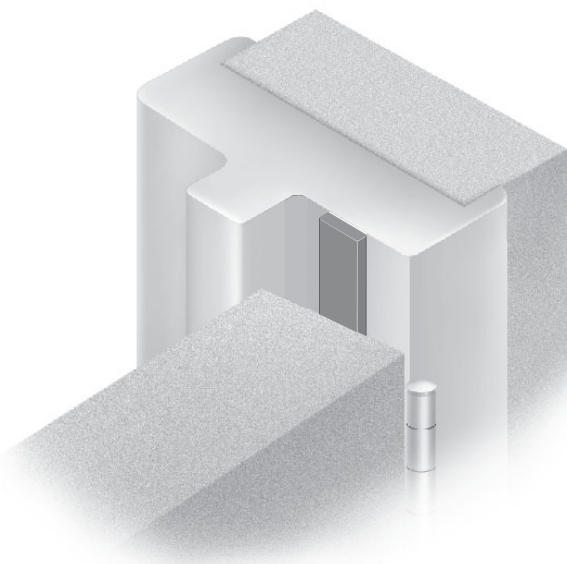

.062"(1.6) x .500"(12.7) seals:  
Provides 30 minutes fire resistance.  
Two parallel seals can provide 60 minutes fire resistance in hardwood constructions.

**#3062750PSA**



.062"(1.6) x .750"(19.1) seals.

**#30621000PSA**



.062"(1.6) x 1.00"(25.4) seals.

**#30621750PSA**



.062"(1.6) x 1.750"(44.5) seals.

**#3125500PSA**



.125"(3.2) x .500"(12.7) seals:  
Suitable for softwood constructions or where the gap between the door and the frame is greater than usual.

**#3125750PSA**





.125"(3.2) x .750"(19.1) seals:  
Provides 60 minutes fire resistance.  
Can be notched to fit around hinges.


**#31251000PSA**





.125"(3.2) x 1.00"(25.4) seals:  
These large seals help control door distortion.  
May also be used between the door frame and masonry.

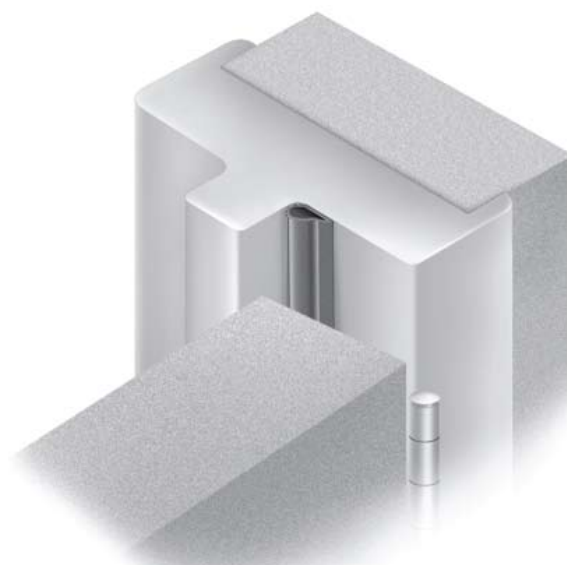

**#188 FS**  
ZERO Compress-O-Matic®



**#488 FS**  
ZERO Mini-Matic®

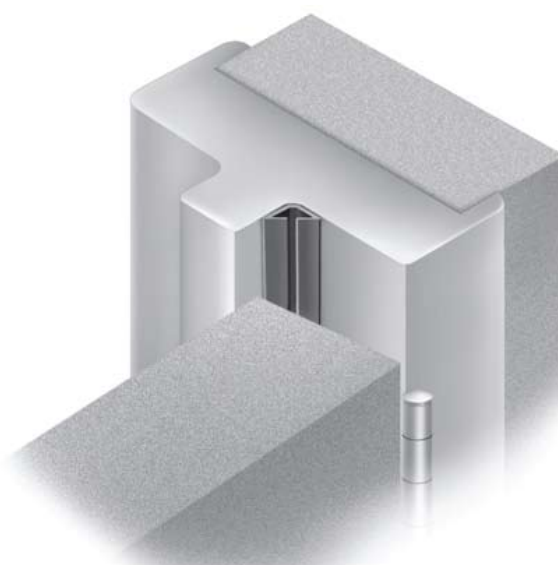

**#8144 FS**

