

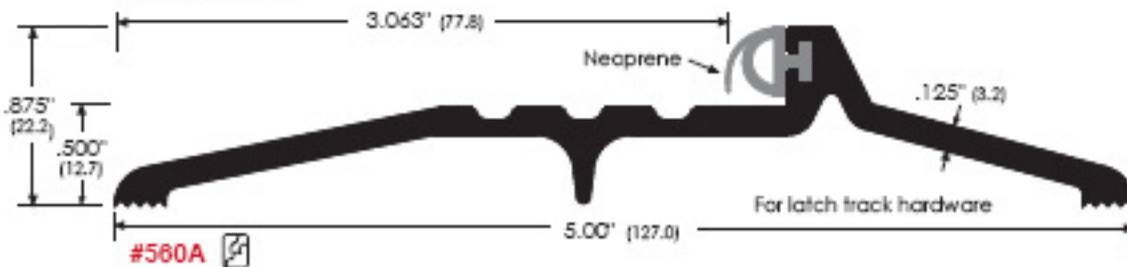
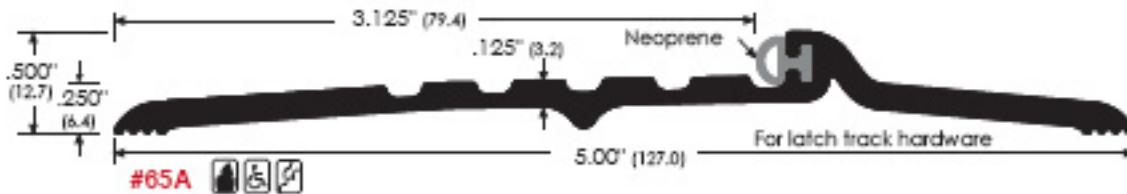
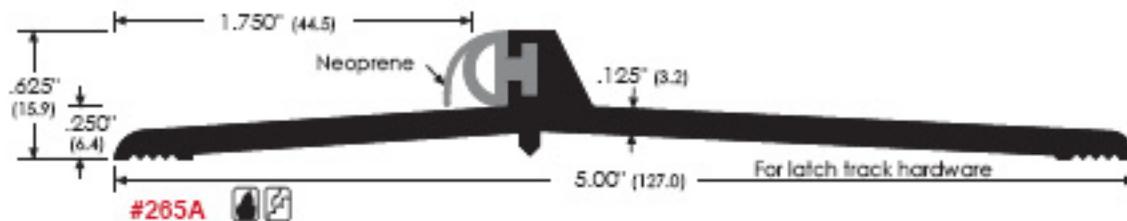
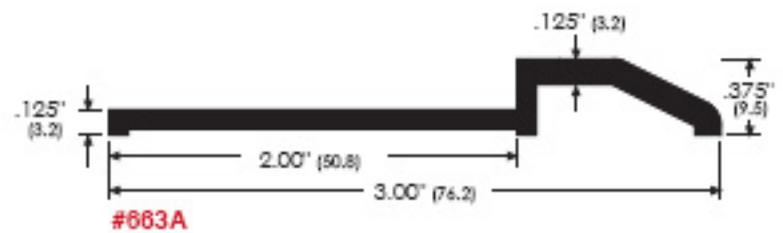
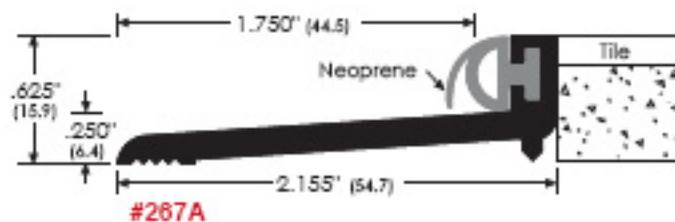
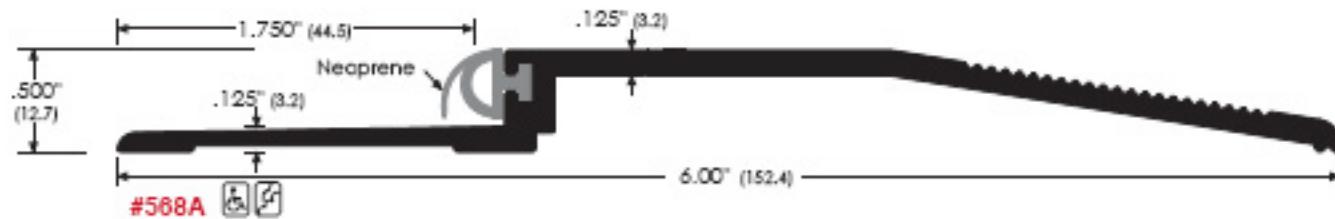


Rabbeted Thresholds

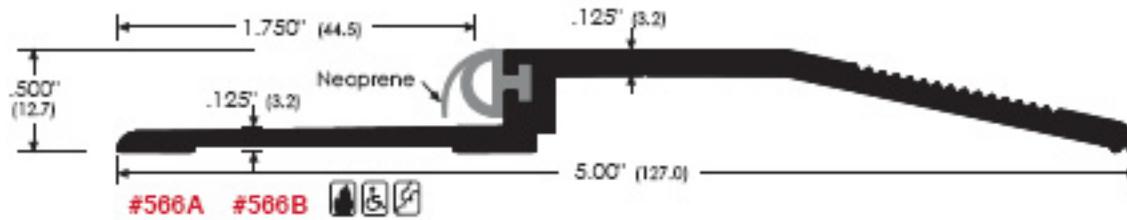

Note: A = Aluminum B = Bronze
D = Dark Bronze Anodized


Thresholds can be ordered with E (Epoxy) or V3 (Full Body Strength) options.

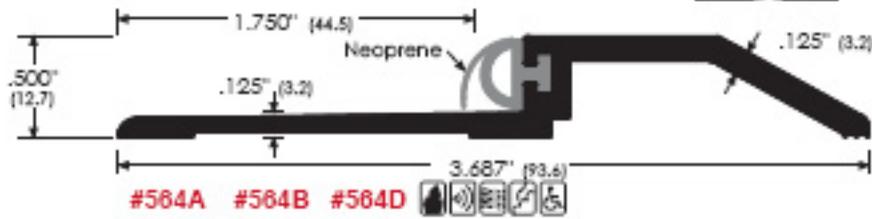

SPECIFY THIS SPECIAL FEATURE

EBF= Extruded Bulb/Finger
The Neoprene gasket is designed with an extra lip for double seal protection, and to compensate for any warping or misalignment during installation.


ZERO Compress-O-Matic®

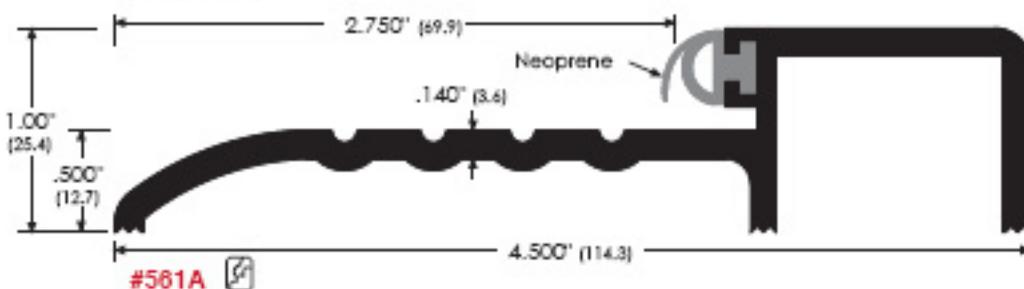

Rabbeted Thresholds



Note: A = Aluminum B = Bronze
 Thresholds can be ordered with E (Epoxy) or V3 (Full Body Strength) options.

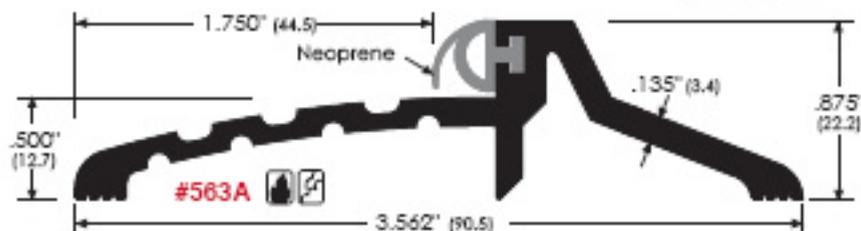

#226 Stainless Steel Sleeve Anchor Optional for all thresholds

- An expansion anchor and 1/4" - 20 x 3" flat head machine screw in one unit.
- Easy installation. Place threshold in position and drill 1/4" dia. x 3 1/2" deep hole through countersunk hole in threshold. Drop the anchor in place and tighten with screwdriver.

