# Accessories and options





#### Security thru sex bolt

Offered for models #43 SP and #43STST, this assembly consists of:

- 1/4-20 X .75" (25.4) FPHSMS
- 1/4-20 X 1.50" (25.4) sex bolt

It may be used with doors up to 13/4" thick.


#### Replacement rubber seals

Replacement seals are available for perimeter seal models containing rubber components. See appendix for replacement rubber seals. If viewing an interim version of the catalog, please contact Tech Support for replacement rubber information.

### Specialized perimeter seal accessories

Specialty exterior protection - Rain drips water shed for outswing doors.


#### 11 Rain drip



#### 141 Rain drip

142 Rain drip


AA, BK, D, G SEC



#6 x 1.00"(25.4) PPHSDS

142AA, 142BK, 142D, 142G R3Y976

**Application** Order components separately.

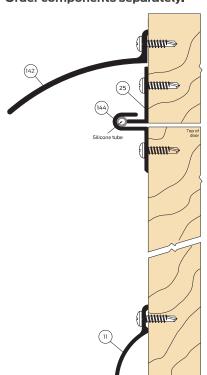


#### 25 Interlocking angle



AA, BK, D, G SEC

This accessory can be used interlocking with rain seal model #144 to impede water ingress through perimeter seals on out-swinging doors.

#### 144



Finishes: Options: AA, BK, D, G SEC

#### See Perimeter seals Accessories & options page for details.

## **Finishes**

Aluminum mill finish AΑ Aluminum clear anodized BK Aluminum black anodized Aluminum dark bronze anodized G Aluminum gold anodized Bronze, architectural mill finish

**B-ORB** Oil-rubbed aged bronze

FLO PSA Pressure-sensitive adhesive ZAG Ligature resistant gasketing Order as a set SEC Security screws

#### Note:

· Zero · Door sealing systems · www.zerointernational.com