
SMOKE PERFORMANCE

7

The rubber seal in this gasket provides protection from smoke infiltration in accordance with provisions of NFPA 101 Life Safety Code and NFPA 80 Standard for Fire Doors and Other Opening Protectives

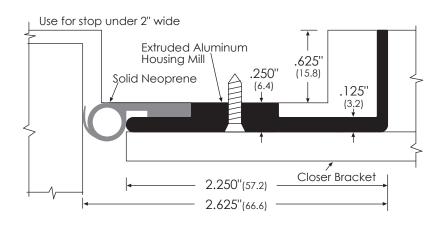

 Legend:
 ANSI/BHMA

 A = Aluminum
 #426A
 R3B164

ZERO	415 Concord Avenue tel: 718.585.3230 Bronx, NY 10455 fax: 718.292.2243 email: zero@zerointernational.com web site: www.zerointernational.com			Part No: 426	
INTERNATIONAL	Notes:			Part Description Head Protection - Stop Applied - For Use with O or Door Coord	n Closer Bracket
Provided By:		Customer	Name:	Job No:	Date: