


**FIRE RATING**

 ITS Warnock Hersey listed

 10B Classified up to 90 minutes

**SMOKE PERFORMANCE**

 The rubber seal in this gasket provides protection from smoke infiltration in accordance with provisions of NFPA 101 Life Safety Code and NFPA 80 Standard for Fire Doors and Other Opening Protectives

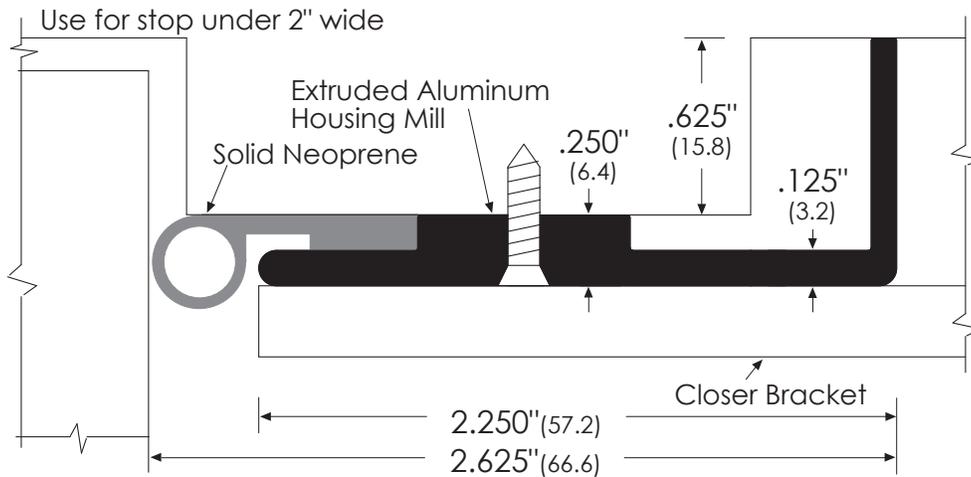

**Legend:**

A= Aluminum

**ANSI/BHMA**

#428A

R3B164

	415 Concord Avenue Bronx, NY 10455 tel: 718.585.3230 fax: 718.292.2243 email: zero@zerointernational.com web site: www.zerointernational.com	<b>Part No:</b> 428	
	<b>Notes:</b>	<b>Part Description:</b> Head Protection - Stop Applied - For Use with Closer Bracket or Door Coordinator	
<b>Provided By:</b>	<b>Customer Name:</b>	<b>Job No:</b>	<b>Date:</b>